



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

O.133

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

(03/93)

**SPECIFICATIONS FOR MEASURING EQUIPMENT
EQUIPMENT FOR THE MEASUREMENT OF
DIGITAL AND ANALOGUE/DIGITAL PARAMETERS**

**EQUIPMENT FOR MEASURING
THE PERFORMANCE OF PCM ENCODERS
AND DECODERS**

ITU-T Recommendation O.133

(Previously "CCITT Recommendation")

FOREWORD

The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of the International Telecommunication Union. The ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Conference (WTSC), which meets every four years, established the topics for study by the ITU-T Study Groups which, in their turn, produce Recommendations on these topics.

ITU-T Recommendation O.133 was revised by the ITU-T Study Group IV (1988-1993) and was approved by the WTSC (Helsinki, March 1-12, 1993).

NOTES

1 As a consequence of a reform process within the International Telecommunication Union (ITU), the CCITT ceased to exist as of 28 February 1993. In its place, the ITU Telecommunication Standardization Sector (ITU-T) was created as of 1 March 1993. Similarly, in this reform process, the CCIR and the IFRB have been replaced by the Radiocommunication Sector.

In order not to delay publication of this Recommendation, no change has been made in the text to references containing the acronyms "CCITT, CCIR or IFRB" or their associated entities such as Plenary Assembly, Secretariat, etc. Future editions of this Recommendation will contain the proper terminology related to the new ITU structure.

2 In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1994

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

CONTENTS

	<i>Page</i>
1 Introduction	1
2 General	1
2.1 Measuring functions and physical configuration	1
2.2 Measuring accuracy and compatibility objectives	1
2.3 Measurement capabilities.....	2
3 Instrument specifications.....	3
3.1 Interfaces.....	3
3.2 Analogue signal generator.....	4
3.3 Analogue signal analyzer	5
3.4 Digital signal generator.....	5
3.5 Digital signal analyzer.....	7
4 Measuring accuracy.....	9
4.1 Definition of the error limits of the measuring instrumentation.....	9
4.2 Summary of total measuring errors.....	10
5 Operating environment.....	14
Annex A – Intrinsic errors in the PCM encoding process which may affect the interpretation of measured results	14
A.1 Introduction.....	14
A.2 Measurement of gain and variation of gain with input level.....	15
A.3 Quantizing distortion measurements.....	22
A.4 General notes to tables and graphs.....	26
References.....	26

Abstract

Defines the requirements for an equipment to measure the performance of PCM equipments in analogue-to-digital (A-D), digital-to-analogue (D-A), analogue-to-analogue (A-A) and digital-to-digital (D-D) modes.

Key words

Measurement, tester, PCM tester, gain, variation of gain/loss with time, return loss, longitudinal balance, attenuation/frequency distortion, weighted noise, discrimination against out-of-band input signals, spurious out-of-band output signals, single frequency noise, total distortion, variation of gain with input level, crosstalk, interference from signalling, frequency of repetitive signal, load capacity.

EQUIPMENT FOR MEASURING THE PERFORMANCE OF PCM ENCODERS AND DECODERS

(Published 1984; revised 1988, 1993)

1 Introduction

1.1 Encoders and decoders conforming to Recommendation G.711 [1] for converting voice-frequency signals to digital (PCM) signals and vice versa are contained in various equipment described by relevant CCITT Recommendations. Examples of these equipment are:

- PCM multiplexers (see Recommendations G.732 [2] and G.733 [3]);
- transmultiplexers (see Recommendations G.793 [4] and G.794 [5]);
- subsystems of digital exchanges (e.g. Recommendations Q.552 [6] and Q.553 [11]).

To ensure that the overall performance limits specified in the CCITT Recommendations are always met where the PCM equipments are interconnected, it is necessary to separately specify and measure the analogue-digital (A-D) and digital-analogue (D-A) performance of the equipment. In addition, analogue-analogue (A-A) and digital-digital (D-D) measurements have to be carried out.

1.2 The measuring instrumentation described below allows these measurements to be made on PCM equipment operating at 2048 kbit/s and/or 1544 kbit/s as specified in Recommendations G.732 [2], G.733 [3], G.793 [4], G.794 [5] and relevant Series Q Recommendations.

2 General

2.1 Measuring functions and physical configuration

The instrumentation described in this Recommendation consists of the following functional units.

2.1.1 An analogue signal generator to apply voice-frequency signals to the analogue input ports of the equipment under test.

2.1.2 An analogue signal analyzer to process voice-frequency signals received from the analogue output ports of the equipment under test.

2.1.3 A digital signal generator to apply test signals to the digital input ports of the equipment under test.

2.1.4 A digital signal analyzer to process signals received from the digital output ports of the equipment under test.

2.1.5 The four units mentioned in 2.1.1 to 2.1.4 may be provided in any convenient physical arrangement as determined by the supplier.

2.1.6 The functions described in 2.1.3 and 2.1.4 may be realized using either conventional analogue-to-digital and digital-to-analogue conversion techniques, or by direct digital processing techniques.

2.2 Measuring accuracy and compatibility objectives

2.2.1 As a general objective, the accuracy of the measuring instrumentation should be an order of magnitude better than the relevant performance limits of the equipment under test. Due to technical and cost limitations, however, it may not always be possible to meet this objective.

2.2.2 In addition errors may increase if instrumentation of different design is interworking or if the input and output parts of the equipment under test are not accessible at the same location (end-to-end measurements).

2.2.3 Where the test methods of Recommendations such as O.131 [12] or O.132 [13] are referenced below, it should be noted that some of the design requirements of such Recommendations may be insufficient to guarantee the accuracy called for in this Recommendation. Even when observing the specifications of this and other relevant Recommendations (e.g. O.131, O.132), compatibility problems may arise especially when pseudorandom noise signals are used as stimuli leading to reduced measuring accuracy and/or fluctuating results indications.

2.2.4 In order to facilitate interworking of instrumentation of different design, it is recommended to provide pseudorandom noise signals having a specified periodicity (see 3.2.3.1 and 3.4.2.1).

2.3 Measurement capabilities

Table 1 contains a list of parameters which can be measured on the various equipment. In addition, the required measuring configuration is indicated. It should be noted, however, that not all the listed parameters can be measured with the instrumentation specified in this Recommendation. Where applicable, reference is made to other pertinent Recommendations.

TABLE 1/O.133
Measurement capabilities

Parameter	Measuring configuration				Measurement facility
	A-D	D-A	A-A	D-D	
Gain (relationship between encoding law and audio level)	+	+	+	+ ^{a)}	E
Load capacity	+	–	–	–	O
Variation of gain (loss) with time	+	+	+	+	E
Return loss (at voice-frequency ports)	+	+	+	–	O
Longitudinal balance	+	+	+	–	O
Attenuation/frequency distortion	+	+	+	+	E
Weighted noise	+	+	+	+	E
Discrimination against out-of-band input signals	Δ	Δ	Δ	Δ	O
Spurious out-of-band output signals	Δ	Δ	Δ	Δ	O
Single frequency noise	Δ	Δ	Δ	Δ	O
Total distortion (including quantizing distortion)	+	+	+	+	E
Variation of gain with input level	+	+	+	+	E
Crosstalk (measured with sinewave signals) ^{a)}	+	+	+	+	E
Crosstalk (measured with conventional telephone signal)	Δ	Δ	+	Δ	O
Interference from signalling ^{b)}					O
Frequency of repetitive signal	+	+	+	+	O
<p>a) Measurement to be performed while injecting an auxiliary signal in the disturbed channel. b) Stimulus for signalling channel is not specified. E Essential O Optional + Yes – Not applicable Δ Capability not provided</p> <p>NOTES</p> <p>1 The receive sections of the equipment specified in this Recommendation may be used for level measurements when assessing the Longitudinal Interference Threshold (LIT). 2 Where no symbol is shown, the need for the measurement is under study.</p>					

3 Instrument specifications

In this clause the minimum requirements to be met by the four functional units of the instrumentation are described. The measuring accuracy is covered in clause 4 below.

Measurement functions described in this Recommendation which require pseudo-random noise stimuli are optional.

3.1 Interfaces

3.1.1 Analogue interfaces

3.1.1.1 Output and input impedances, balanced earth free: 600 and/or 900 ohms.

3.1.1.2 Return loss from 200 Hz to 4 kHz: ≥ 36 dB.

3.1.1.3 Longitudinal conversion loss (frequency range 200 Hz to 4 kHz): ≥ 46 dB.

3.1.1.4 Complex impedances

For measurements at interfaces with complex impedances, the instrument shall be equipped with corresponding input impedances. Examples of such impedances are given in Table 1/Q.552 [6].

For this application, the instrument shall be calibrated in accordance with A.3/G.100 [18], namely:

At the reference frequency of 1020 Hz, 0 dBm0 represents an absolute power level of 1 milliwatt measured at the transmission reference point (0 dBr point).

The voltage V of a 0 dBm0 tone at any voiceband frequency is given by the expression:

$$V = \sqrt{1 \text{ W} \cdot 10^{-3} \cdot |Z_{1020}|}$$

where $|Z_{1020}|$ is the modulus of the nominal impedance, Z , at the reference frequency 1020 Hz. Z may be resistive or complex.

3.1.2 Digital interfaces

3.1.2.1 Level conditions and frame format

The instrumentation is required to operate satisfactorily with interface levels in accordance with Recommendation G.703 [7].

One or both of the following conditions of interface and frame formats, including extended frame formats and cyclic redundancy check (CRC) procedures, shall be provided:

At 1544 kbit/s, clause 2/G.703 [7] and Recommendations G.733 [3] and G.704 [10].

At 2048 kbit/s, clause 6/G.703 [7] and Recommendations G.732 [2] and G.704 [10].

Additionally the digital analyzer is required to operate satisfactorily when connected via a length of cable which has an insertion loss of 6 dB at the half bit rate of the signal. The insertion loss of the cable at other frequencies will be proportional to \sqrt{f} .

In addition to providing for terminated measurements the instrumentation may also be required to monitor at protected test points on digital equipment. Therefore a high impedance and/or additional gain should be provided to compensate for the loss at monitoring points already provided on some equipment.

3.1.2.2 Impedances of digital interfaces

The impedances at the digital outputs and inputs shall conform to clause 2/G.703 and clause 6/G.703 [7].

The return loss measured against the nominal impedance shall be:

- 1544 kbit/s (with pre-emphasis)
 - frequency range 20 kHz to 1.6 MHz at the input: ≥ 20 dB
 - frequency range 20 kHz to 500 kHz at the output: ≥ 14 dB
 - frequency range 500 kHz to 1.6 MHz at the output: ≥ 16 dB

- 1544 kbit/s (without emphasis)
frequency range 20 kHz to 1.6 MHz at both input and output: ≥ 20 dB
- 2048 kbit/s
frequency range 40 kHz to 2.5 MHz at both input and output: ≥ 20 dB

3.1.2.3 Longitudinal conversion loss

(Under study.)

3.2 Analogue signal generator

The following minimum functions shall be provided.

3.2.1 Relative levels

See Recommendation G.232 [8].

3.2.1.1 Relative levels (minimum range): -16 dBr to 0 dBr.

3.2.2 Sinusoidal test signals

3.2.2.1 At levels of 0 and -10 dBm₀, the generator shall produce test signals in the frequency range 200 to 3600 Hz. The frequencies of 3.2.2.2 below, comprising the reference and break points of the relevant masks, shall be provided as a minimum. See 4.1.4 for a note on the choice of test frequencies.

3.2.2.2 Test signal frequencies (approximately): 200 , 300 , 420 , 500 , 600 , 820 , 1020 , 2400 , 2800 , 3000 , 3400 and 3600 Hz.

3.2.2.3 Deviation of transmitted frequency from indicated value f : ± 2 Hz $\pm 0.1\%$ of f .

3.2.2.4 For at least one frequency (preferably approximately 1020 Hz), it shall be possible to adjust the level of the signal between $+3$ dBm₀ and -55 dBm₀. The levels of 3.2.2.5 comprising the reference and break points of the relevant masks shall be provided as a minimum. See 4.1.4 for a note on the choice of test frequencies.

3.2.2.5 Test signal levels: -55 , -50 , -45 , -40 , -30 , -20 , -10 , 0 , $+3$ dBm₀.

3.2.2.6 Deviation of transmitted level from indicated level over the operating range of the instrument: ± 0.2 dB. Means shall nevertheless be provided to make relative measurements as defined in 4.2 within the specified tolerances.

NOTE – This tolerance is specified to facilitate interworking. Deviations in measurement results due to errors in test levels must be considered when reading the measuring accuracies quoted in this Recommendation.

3.2.2.7 Total distortion referred to a measurement bandwidth of 20 kHz is to be at least 20 dB better than the limits given in the diagram of Figure A.5/G.712 [9].

3.2.3 Pseudorandom test signal

3.2.3.1 A pseudorandom test signal in accordance with Recommendation O.131 shall be provided. To facilitate interworking, the sequence repetition rate (period) shall be fixed at 256 ms (2048 samples) derived, where possible, from the sampling rate of the encoder under test. Otherwise, the tolerance shall be ± 1 ms.

NOTE – This requirement is also met by a period of 128 ± 0.5 ms (1024 samples).

3.2.3.2 The level of the pseudorandom test signal shall be adjustable between -3 dBm₀ and -55 dBm₀. The levels of 3.2.3.3 below, comprising the reference and break points of the relevant masks, shall be provided as a minimum.

3.2.3.3 Test signal levels: -55 , -50 , -40 , -34 , -27 , -10 , -6 , -3 dBm₀.

3.2.4 Auxiliary signal

3.2.4.1 In order to increase the accuracy when performing crosstalk measurements, an auxiliary (activating) signal for injection into the disturbed channel shall be provided.

3.2.4.2 Band-limited noise located between 350 and 550 Hz similar to that specified in Recommendation O.131 [12], and having a level in the range -50 to -60 dBm0, may be used as an auxiliary signal. At frequencies below 250 Hz and in the range 700 Hz to 4 kHz, the spurious signal shall be at least 40 dB smaller than the auxiliary signal.

3.2.4.3 As an alternative, a sinusoidal signal having a level in the range -33 to -40 dBm0 may be employed. Harmonic components of the sinusoidal signal shall be at least 40 dB below the fundamental.

3.3 Analogue signal analyzer

The following minimum functions shall be provided.

3.3.1 Relative levels

(See Recommendation G.232 [8].)

3.3.1.1 Relative levels (minimum range): -5 dBr to $+7$ dBr.

3.3.2 Level

3.3.2.1 Level measuring range: -60 to $+5$ dBm0.

3.3.3 Return loss (optional)

3.3.3.1 Return loss measuring range: 0 to 40 dB over the frequency range 200 to 3600 Hz.

3.3.4 Longitudinal balance in accordance with Recommendation O.9 [14] (optional)

3.3.4.1 Longitudinal conversion loss measuring range: 5 to 56 dB, over the frequency range 200 to 3600 Hz.

3.3.4.2 Longitudinal conversion transfer loss measuring range: 5 to 56 dB, over the frequency range 200 to 3600 Hz.

3.3.5 Weighted noise in accordance with Recommendation O.41 [15]

3.3.5.1 Noise measuring range: -80 to -20 dBm0p.

3.3.6 Total distortion in accordance with Recommendations O.131 and/or O.132

NOTE – To facilitate interworking, the observation time for Recommendation O.131 shall be 256 ms or a multiple thereof, derived, where possible, from the sample rate of the decoder under test. Otherwise the tolerance shall be ± 1 ms.

3.3.6.1 Total distortion measuring range: 0 to 40 dB.

3.3.7 Crosstalk

3.3.7.1 Level measuring range: -75 to -20 dBm0.

3.3.8 Frequency of a repetitive signal

As an option, it shall be possible to measure and display the frequency of any repetitive signal in the frequency range 200 and 4000 Hz applied to the input of the instrument at any level in the range defined in 3.3.2. The result shall be displayed to a resolution of 1 Hz. The measurement shall be made to an accuracy of at least $50 \cdot 10^{-6}$.

3.4 Digital signal generator

The following facilities shall be provided by the digital signal generator.

3.4.1 Digitally encoded sine wave signals

3.4.1.1 At levels of 0 and -10 dBm0, digitally encoded sine waves with frequencies in the range 200 Hz to 3600 Hz are to be provided. The frequencies of 3.4.1.2 comprising the reference and break points of the relevant masks, shall be provided as a minimum. See 4.1.4 for a note on the choice of test frequencies.

3.4.1.2 Test signal frequencies (approximately): 200, 300, 420, 500, 600, 820, 1020, 2400, 2800, 3000, 3400 and 3600 Hz.

3.4.1.3 Deviation of transmitted frequency from indicated frequency: $\pm 2 \text{ Hz} \pm 0.1\%$.

3.4.1.4 For at least one frequency (preferably approximately 1020 Hz), it shall be possible to adjust the level of the signal between +3 dBm0 and -55 dBm0. The levels of 3.4.1.5 below, comprising the reference and break points of the relevant masks, shall be provided as a minimum. See 4.1.4 for a note on the choice of test frequencies.

3.4.1.5 Test signal levels: -55, -50, -45, -40, -30, -20, -10, 0, +3 dBm0.

3.4.1.6 Deviation of transmitted level from indicated level: $\pm 0.2 \text{ dB}$.

NOTE – This tolerance is specified to facilitate interworking. Deviations in measurement results due to errors in test levels should be included in measuring accuracy specifications.

3.4.1.7 Digital reference sequence

The digital signal generator shall be capable of generating the periodic sequences of character signals detailed in Table 5/G.711 [1] and/or Table 6/G.711 [1], equivalent to a 1 kHz sine wave at a nominal level of 0 dBm0.

3.4.2 Digitally encoded pseudorandom noise signal

3.4.2.1 The noise source shall have the same characteristics, in terms of frequency spectrum and amplitude distribution, as a signal that would result from applying a band-limited pseudorandom noise source, conforming to Recommendation O.131 [12], to a perfect transmit channel. To facilitate interworking, the sequence repetition rate (period) shall be fixed at $256 \pm 1 \text{ ms}$ (2048 samples).

NOTE – This requirement is also met by a period of $128 \pm 0.5 \text{ ms}$ (1024 samples).

3.4.2.2 The level of the digitally encoded pseudorandom noise signal shall be adjustable between -3 dBm0 and -55 dBm0. The levels of 3.4.2.3 below, comprising the reference and break points of the relevant masks, shall be provided as a minimum.

3.4.2.3 Test signal levels: -55, -50, -40, -34, -27, -10, -6, -3 dBm0.

3.4.3 Additional digital signals

In addition to the signals specified in 3.4.1 and 3.4.2, it shall be possible to manually select any 8-bit repetitive pattern.

3.4.4 Time slot assignment

3.4.4.1 It shall be possible to apply the signals described in 3.4.1, 3.4.2 and 3.4.3 to:

- a) any selected speech time slot;
- b) as an option, to all speech time slots.

Speech time slots not containing the signals described in 3.4.1 and 3.4.2 shall be provided with the digital signals of 3.4.3.

3.4.4.2 As an option, an interface shall be provided to enable an externally generated digital signal to be applied to any selected speech time slot. The interface shall meet the requirements of a co-directional interface as defined in Recommendation G.703 [7].

3.4.5 Test of PCM multiplex alarm unit

3.4.5.1 2048 kbit/s PCM multiplexers (e.g. Recommendation G.732 [2])

3.4.5.1.1 It shall be possible to modify any bit of the digital signal in time slot 0 of the frames containing the frame alignment signal and of the frames not containing the frame alignment signal in order to fully test the multiplex alarm unit.

3.4.5.1.2 It shall be possible to modify any bit of the digital signal in time slot 16 of frame 0.

3.4.5.1.3 As an option during the tests described in 3.4.5.1.1 and 3.4.5.1.2, a digitally encoded sine wave signal of approximately 1020 Hz at a level of 0 dBm0 shall be applied to all speech time slots. This is to provide a means of checking speech highway suppression when the multiplex alarm unit operates.

3.4.5.1.4 As an option, it shall be possible to modify any bit of the digital signal in time slot 16 of frames 1 to 15 of a multiframe when channel associated signalling is in use. All 30 signalling channels may be provided with the same pattern.

3.4.5.1.5 The instrument shall be capable of generating frame formats including CRC multiframes and CRC check bits, in accordance with 2.3/G.704 [10].

3.4.5.1.6 Where a CRC multiframe is being generated, it shall be possible to modify any bit of the CRC multiframe alignment signal.

3.4.5.1.7 As an option, an interface shall be provided to allow the signalling bits associated with any selected speech time slot to be controlled from an external source when channel associated signalling is in use.

3.4.5.2 1544 kbit/s PCM multiplexers (e.g. Recommendation G.733 [3])

3.4.5.2.1 The instrument shall be capable of generating frame formats including CRC multiframes, in accordance with 3.1/G.704 [10].

3.4.5.2.2 It shall be possible to modify the first bit of each frame containing the frame alignment signal.

3.4.5.2.3 It shall be possible to modify the first bit of frame 12.

3.4.5.2.4 Where the 12-frame multiframe is being generated, it shall be possible to modify the eighth bit of each channel time slot in frames 6 and 12 when channel associated signalling is in use. All signalling channels may be provided with the same pattern.

3.4.5.2.5 Where the 24-frame multiframe is being generated, it shall be possible to modify the eighth bit of each channel time slot in frame 6, 12, 18 and 24 when channel associated signalling is in use. All signalling channels may be provided with the same pattern.

3.4.5.2.6 As an option, an interface shall be provided to allow the signalling bits associated with any selected speech time slot to be controlled from an external source when channel associated signalling is in use.

3.4.6 Selectable synchronization

It shall be possible to either:

- a) lock the digital generator clock rate to that at the input of the digital analyzer; or
- b) allow the generator and analyzer clocks to free run within the overall allowed frequency tolerances;
- c) as an option, lock the digital generator clock rate to an external clock.

3.5 Digital signal analyzer

The digital signal analyzer shall be capable of measuring the following parameters by extracting the digital signal from any selectable time slot of the PCM multiplex stream, and treating it, where appropriate, as an encoded audio signal.

3.5.1 Level

3.5.1.1 Level measuring range: –60 to +5 dBm0.

3.5.2 Weighted noise in accordance with Recommendation O.41 [15]

3.5.2.1 Noise measuring range: –80 to –20 dBm0p.

NOTE – If the digital analyzer is receiving a digital signal corresponding to the decoder output value number 1 for the A-law or decoder output value number 0 for the μ -law and the polarity bit is kept in a fixed position, the indicated noise level shall not exceed –85 dBm0p.

3.5.3 Total distortion in accordance with Recommendations O.131 [12] and/or O.132 [13]

NOTE – To facilitate interworking, the observation time for Recommendation O.131 shall be 256 ms or a multiple thereof, derived, where possible, from the sample rate of the encoder under test. Otherwise the tolerance shall be ± 1 ms.

3.5.3.1 Total distortion measuring range: 0 to 40 dB.

3.5.4 Crosstalk

3.5.4.1 Level measuring range: -75 to -20 dBm0.

3.5.5 Peak code detection and display

It shall be possible to display the positive and/or negative peak code present in an observation period of at least 800 frames, or in automatically selected repetitive periods of at least 800 frames. This code may have any integer value in the range 0 to ± 127 . As an alternative option, the peak code can be indicated by a display of the equivalent tone level in dBm0.

3.5.6 Signalling bits

3.5.6.1 As an option, the signalling bits associated with any speech time slot shall be selectable for display when channel associated signalling is in use.

3.5.6.2 As an option, an interface shall be provided to enable the signalling bits associated with any selectable speech time slot to be monitored by an externally connected instrument when channel associated signalling is in use.

3.5.7 Alarm detection and display (optional)

The digital analyzer shall be capable of monitoring the digital output of a PCM multiplex and recognizing and displaying the following alarm conditions and bit states.

3.5.7.1 PCM multiplex to Recommendation G.732 [2]: loss of signal, loss of frame alignment, loss of multiframe alignment where channel associated signalling is in use, loss of CRC multiframe alignment, state of bit 1 of time slot 0 of frame containing frame alignment signal, state of bits 1 and 3 to 8 of time slot 0 of frame not containing frame alignment signal, state of bit 6 of time slot 16 of frame 0, and display of information conveyed via the CRC procedure as defined in Recommendation G.704 [10].

3.5.7.2 PCM multiplex to Recommendation G.733 [3]

3.5.7.2.1 Loss of signal, loss of frame alignment, loss of multiframe alignment when channel associated signalling is in use.

3.5.7.2.2 When a 12-frame multiframe is being monitored, the state of bit 8 of each channel in the 6th and 12th frames and the state of bit 1 of the 12th frame.

3.5.7.2.3 When a 24-frame multiframe is being monitored, the state of bit 8 of each channel in the 6th, 12th, 18th and 24th frames, the state of bit 1 of the 12th frame, and the display of information conveyed via the CRC procedure as defined in Recommendation G.704 [10].

3.5.8 Frequency of a repetitive signal

As an option, it shall be possible to measure and display the frequency of any repetitive signal in the frequency range 200 Hz to 4000 Hz applied at a level in the range defined in 3.5.1. The result shall be displayed to a resolution of 1 Hz. The measurement shall be made to an accuracy of at least $50 \cdot 10^{-6}$.

3.5.9 External speech time-slot interface

As an option, an interface shall be provided to enable the digital signal contained in a selected speech time slot to be extracted and applied to a separate instrument. The interface shall meet the requirements of a co-directional interface as defined in Recommendation G.703 [7].

4 Measuring accuracy

4.1 Definition of the error limits of the measuring instrumentation

4.1.1 The error limits stated in this Recommendation refer always to a complete measuring configuration and therefore include errors of the generator as well as of the analyzer side (if applicable).

4.1.2 Even ideal encoder/decoder pairs conforming to the requirements of Recommendation G.711 [1] exhibit intrinsic limitations to the PCM process which cannot be avoided¹⁾. Examples are maximum load capacity, quantizing distortion ratio, variation of gain with input level and limited audio frequency range.

The measuring instrumentation described here has the same general characteristics and limitations as an ideal encoder/decoder conforming to Recommendation G.711 [1]. For the purposes of this Recommendation the differences between an ideal encoder/decoder conforming to Recommendation G.711 [1] and the measuring instrument are defined as measuring errors. Figure 1 illustrates the relationship of these errors to the errors exhibited by the digital signal generator and digital signal analyzer.

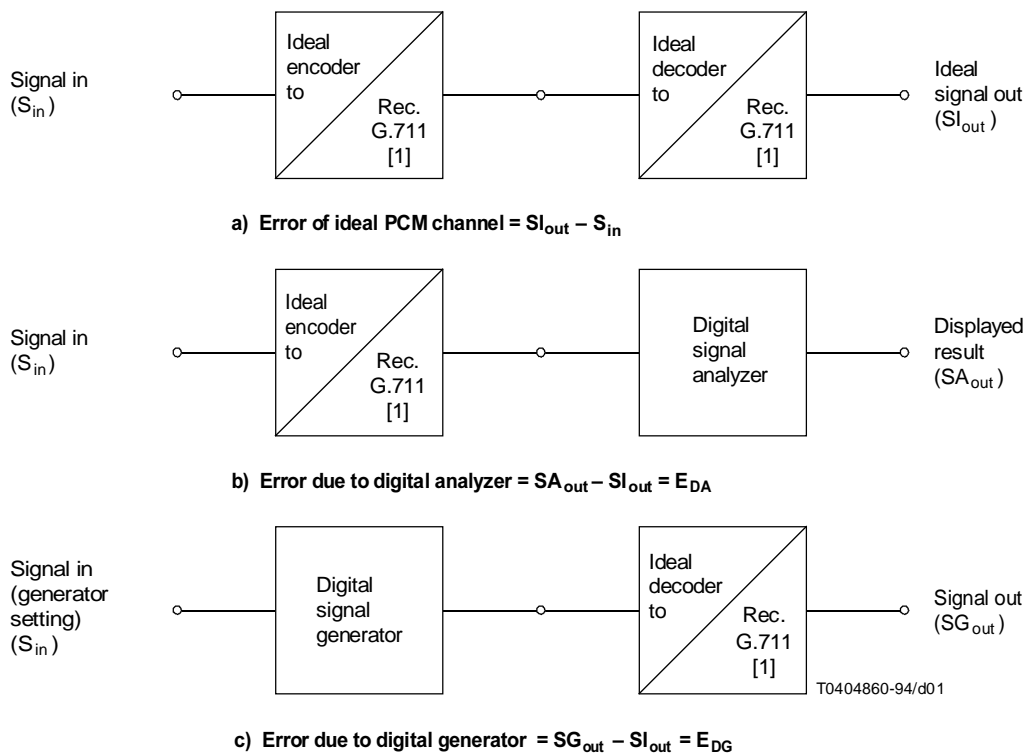


FIGURE 1/O.133

Error definitions for digital analyzer and generator

4.1.3 When stating the total measuring error, the errors contributed by the analogue analyzer (E_{AA}) and the analogue generator (E_{AG}) must also be considered. Because of the limited level accuracy of the analogue signal generator, variations in measurement result will arise due to quantizing gain effects in the PCM channel under test¹⁾.

¹⁾ See Annex A concerning the intrinsic errors in the PCM encoding process which may affect the interpretation of measured results.

The total measuring error applicable to the four measuring configurations can be calculated as shown in Table 2.

TABLE 2/O.133

Definition of total measuring error

Measuring configuration	Total measuring error
A-D	$E_{AG} + E_{DA}$
D-A	$E_{DG} + E_{AA}$
A-A	$E_{AG} + E_{AA}$
D-D	$E_{DG} + E_{DA}$

4.1.4 Choice of test frequencies

When specifying the accuracy of measurements on sinusoidal signals, the tone presented to the ideal encoder in Figure 1 is assumed to have a frequency unrelated to the sampling rate, and the measurement time is assumed to be long enough to eliminate averaging error.

Intrinsic errors in tone measurements depend on the highest common factor of the test signal frequency and the PCM sampling rate. Simple submultiples of the sampling rate, and their harmonics, should be avoided. The instrumentation should use a large number of independent samples and the measuring accuracy should be specified relative to a minimum number of samples. A figure of at least 400 is recommended. Restrictions on the use of other frequencies should be stated. The choice of test frequency shall be made in accordance with Recommendation O.6 [16].

4.1.5 Intrinsic distortion of test signals

To facilitate interworking on total distortion measurements, certain variable-level, digitally-encoded signals, if provided, should be specified for intrinsic total distortion over the range of selectable levels, measured as follows:

- Pseudorandom noise, sinusoidal signal, 420 Hz: by the method of Recommendation O.131 [12] (optional).
- Sinusoidal signal, 1020 Hz: by the method of Recommendation O.132 [13].

4.1.6 Measurement bandwidth for tone measurements

The design of filters for tone measurements is not specified. However, measurement errors should be calculated relative to the results obtained by ideal selective measurement.

4.2 Summary of total measuring errors

Full 8-bit coding is assumed as specified in Recommendation G.711 [1].

4.2.1 Gain (relationship between encoding law and audio level)

See Table 3.

TABLE 3/O.133

Parameter	Error limits (dB)			
	A-D	D-A	A-A	D-D
Gain (relationship between encoding law and audio level) ^{a)}	± 0.08	± 0.08	± 0.05	± 0.05
<p>a) Measured at one frequency, approximately 1020 Hz at a level of 0 dBm0.</p> <p>NOTE – If a sinusoidal test signal is used, uncertainties in the absolute level position of the companding law characteristic of a practical encoder require special interpretation of the error limits specified in modes A-D, A-A and (if the signal passes via an analogue point) D-D. In these modes, the figures represent the accuracy with which the <i>envelope</i> of the characteristic can be located, rather than the accuracy of any <i>single result</i>. For further discussion and the theoretical location of the envelope, see Annex A.</p>				

4.2.2 Return loss (optional)

See Table 4.

TABLE 4/O.133

Parameter	Indicated result	Error limits (dB)			
		A-D	D-A	A-A	D-D
Return loss ^{a)}	0 to 30 dB	± 1	± 1	± 1	–
	30 to 40 dB	± 2	± 2	± 2	–
<p>a) Measured at a level ≥ –10 dBm0.</p>					

4.2.3 Longitudinal conversion loss (LCL) (optional)

See Table 5.

TABLE 5/O.133

Parameter	Indicated result	Error limits (dB)			
		A-D	D-A	A-A	D-D
LCL ^{a)}	5 to 40 dB	± 1.5	–	± 1.5	–
	40 to 56 dB	± 2.5	–	± 2.5	–
<p>a) Measured at a level ≥ –10 dBm0.</p>					

4.2.4 Longitudinal conversion transfer loss (LCTL) (optional)

See Table 6.

TABLE 6/O.133

Parameter	Indicated result	Error limits (dB)			
		A-D	D-A	A-A	D-D
LCTL ^{a)}	5 to 40 dB	± 1.5	–	± 1.5	–
	40 to 56 dB	± 2.5	–	± 2.5	–
^{a)} Measured at a level ≥ –10 dBm0.					

4.2.5 Attenuation/frequency distortion

See Table 7.

TABLE 7/O.133

Parameter	Indicated result	Error limits (dB)			
		A-D	D-A	A-A	D-D
Attenuation/frequency distortion ^{a)}	200 to 300 Hz	± 0.08	± 0.08	± 0.08	± 0.08
	300 to 3000 Hz	± 0.05	± 0.05	± 0.05	± 0.05
	3000 to 3600 Hz	± 0.08	± 0.08	± 0.08	± 0.08
^{a)} Measured at a level of 0 or –10 dBm0. Error referred to measurement at approximately 820 Hz/1020 Hz. The specified measurement error is applicable if the measured attenuation/frequency distortion does not exceed 6 dB.					

4.2.6 Weighted noise

See Table 8.

TABLE 8/O.133

Parameter	Indicated result	Error limits (dB)			
		A-D	D-A	A-A	D-D
Weighted noise ^{a)}	–80 to –75 dBm0p	± 2.5	± 2.5	± 2.5	± 2.5
	–75 to –70 dBm0p	± 1.5	± 1.5	± 1.5	± 1.5
	–70 to –20 dBm0p	± 1	± 1	± 1	± 1
^{a)} Measurement error includes tolerances of the weighting filter given in Recommendation O.41 [15].					

4.2.7 Total distortion

See Table 9.

TABLE 9/O.133

Parameter	Indicated result ^{a)}	Error limits (dB) ^{a)}			
		A-D	D-A	A-A	D-D
Total distortion (noise test signal)	0 to 40 dB	± 0.5	± 0.5	± 0.5	± 0.5
Total distortion (sinusoidal test signal)	0 to 40 dB	± 0.8	± 0.8	± 0.8	± 0.8

a) With an absolute distortion signal not less than -72 dBm0.

NOTE – If a sinusoidal test signal is used, uncertainties in the absolute level position of the companding law characteristic of a practical encoder require special interpretation of the error limits specified in modes A-D, A-A and (if the signal passes via an analogue point) D-D. In these modes, the figures represent the accuracy with which the *envelope* of the characteristic can be located, rather than the accuracy of any *single result*. For further discussion and the theoretical location of the envelope, see Annex A.

4.2.8 Variation of gain with input level

See Table 10.

TABLE 10/O.133

Parameter	Level range	Error limits (dB) ^{a)}			
		A-D	D-A	A-A	D-D
Gain variation (noise test signal)	-10 to -40 dBm0	± 0.10	± 0.10 ^{b)}	± 0.15 ^{b)}	± 0.10
	-40 to -50 dBm0	± 0.15	± 0.15	± 0.20	± 0.10
	-50 to -55 dBm0	± 0.15	± 0.15	± 0.20	± 0.10
Gain variation (sinusoidal test signal at approximately 420, 820 or 1020 Hz)	+ 3 to -40 dBm0	± 0.10 ^{b)}	± 0.10	± 0.15	± 0.10
	-40 to -50 dBm0	± 0.20	± 0.15	± 0.20	± 0.15
	-50 to -55 dBm0	± 0.25	± 0.20	± 0.25	± 0.20

a) Error referred to measurement of -10 dBm0.

b) Provisional value, to be studied further.

NOTE – If a sinusoidal test signal is used, uncertainties in the absolute level position of the companding law characteristic of a practical encoder require special interpretation of the error limits specified in modes A-D, A-A and (if the signal passes via an analogue point) D-D. In these modes, the figures represent the accuracy with which the *envelope* of the characteristic can be located, rather than the accuracy of any *single result*. For further discussion and the theoretical location of the envelope, see Annex A.

4.2.9 Crosstalk measurement

See Table 11.

TABLE 11/O.133

Parameter	Remarks	Error limits (dB)			
		A-D	D-A	A-A	D-D
Crosstalk	Sinusoidal test signal ^{a)}	± 1	± 1	± 1	± 1
	Conventional telephone signal ^{b)} (optional)	–	–	± 1.5	–
<p>a) Measurement to be performed while injecting an auxiliary signal in the disturbed channel. Appropriate auxiliary signals are defined in 3.2.4. Error includes effect of finite rejection of the auxiliary signal by the measurement filter and of quantizing distortion in the measurement bandwidth.</p> <p>b) Measurement error includes tolerances of the weighting filter given in Recommendation O.41.</p>					

5 Operating environment

The electrical performance requirements shall be met when operating at the climatic conditions as specified in 2.1/O.3 [17].

Annex A

Intrinsic errors in the PCM encoding process which may affect the interpretation of measured results

(This annex forms an integral part of this Recommendation)

A.1 Introduction

Pulse Code Modulation (PCM) has some inherent limitations which affect measurements on PCM encoders. This pertains especially to the measurement of the variation of gain with input level and of the quantizing distortion ratio. Due to the limited number of quantizing steps available for encoding an analogue signal, the output signal of a PCM decoder is not a replica of the input signal to the encoder. Depending on the actual amplitude of the signal samples to be encoded, as compared with the quantizing thresholds, the output values at the decoder are sometimes greater and sometimes smaller than would occur in a linear system. The differences are called quantizing errors, and exist even for an ideal PCM encoder/decoder pair conforming to a practical encoding law. A test signal will experience the average effect of the quantizing errors in all its samples, which depends on the amplitude distribution of the signal. For Gaussian noise, the errors tend to average out, and no measurement problems arise. However, this is not the case for sinusoidal signals, and measurement results for gain linearity and quantizing distortion ratio must be interpreted with care.

A.2 Measurement of gain and variation of gain with input level

As mentioned in the introduction, the signal at the output of a PCM decoder may differ from what would occur at the output of a linear system. This means that a PCM channel may appear to have unexpected gain when measured with a sinusoidal signal. This “quantizing gain” is sometimes positive and sometimes negative and varies with input level. In the case of linear encoding, the more quantizing steps available for encoding the analogue input signal, the smaller the quantizing errors and hence the gain variations. With a truly logarithmic encoding characteristic the quantizing error would be independent of the input level.

The encoding laws used in practice (A- and μ -law) approximate the logarithmic characteristic by a segmented curve. For the A-law, this results in a gain variation which follows the same rules for the segments No. 7 to No. 2 and which increases with decreasing input level for segment No. 1. Because the values at the segment end points of the μ -law characteristic are not multiples of 2 (as with the A-law), the gain variations for the corresponding segment portions are similar but not identical.


Figures A.1 to A.4 show the (calculated) variation of gain with input level when measuring a PCM channel with an asynchronous sinusoidal signal. Because the gain variation in the upper segments is always between +0.043 dB and -0.048 dB, only the level range below -30 dBm0 is shown. The gain has a sharp minimum each time the peak of the sinusoid passes through a decision value. As the input amplitude is increased, the gain rises quickly to a maximum before falling again. In the vicinity of the minima, the gain can vary substantially when the input level is varied only by small amounts. With the A-law, for example, the gain changes by approximately 0.8 dB (selective measurements) when the input level is varied between -57.00 dB and -57.066 dB. In this case the ratio of level-to-gain variation is 1:11.8. For greater input levels and for the μ -law, the variation of gain with input level is smaller but still not negligible.

For signal levels above -60 dBm0, the maximum excursions are within a range of approximately -1.3 to +0.65 dB (-1.0 to +0.9 dB) for the A-law, and approximately 0.5 to 0.3 dB (-0.45 to 0.35 dB) for the μ -law depending on the measurement mode selective or (wideband).

When measuring the gain variation of a PCM channel with a sinusoidal stimulus, the theoretical considerations described above must be taken into account. Because the relative level at the encoder input need only be set within a limit of ± 0.3 dB or ± 0.4 dB, respectively (see Recommendation G.719 [9]), and because the analogue signal generator used for the measurement has some uncertainty in the send level setting, it is not possible to exactly predict the actual position on the encoding characteristic or even to avoid the minima. For this reason, any single measurement result must be treated as relative to the envelope of the gain variation characteristic. Additionally, it has to be considered that Figures A.1 to A.4 represent theoretical values with ideal encoders having no quantizing threshold errors. In practice, deviations from the ideal characteristics due to encoder threshold offset must be expected.

This limitation also applies to measurements of gain, although at high levels the error is small – of the order of ± 0.04 dB.


To simplify the interpretation of measurement results, Tables A.1 to A.4 list the extreme values of the gain variation with input level for the A- and μ -law for selective and wideband measurements. The tables have 64 lines (multiple of 16), so one line contains the values of corresponding segment portions. For the A-law the corresponding gain values in the first three columns are identical.

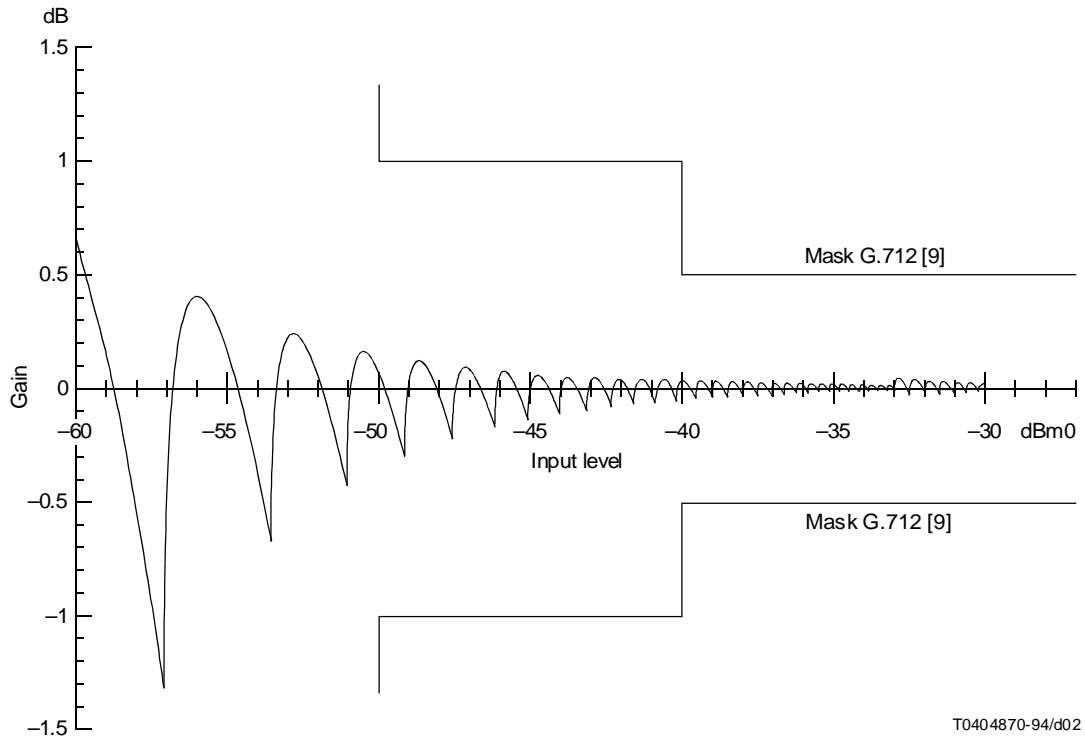

T0404870-94/d02

FIGURE A.1/O.133


Variation of gain with input level, A-law, selective measurement

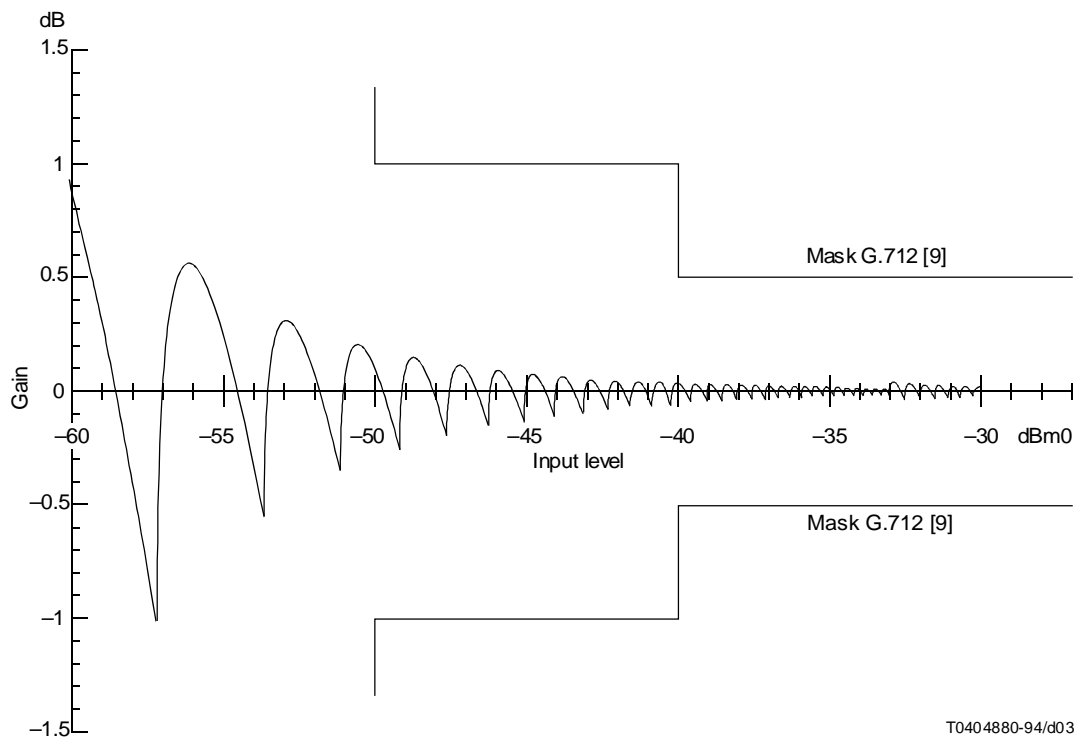

T0404880-94/d03

FIGURE A.2/O.133


Variation of gain with input level, A-law, wideband measurement

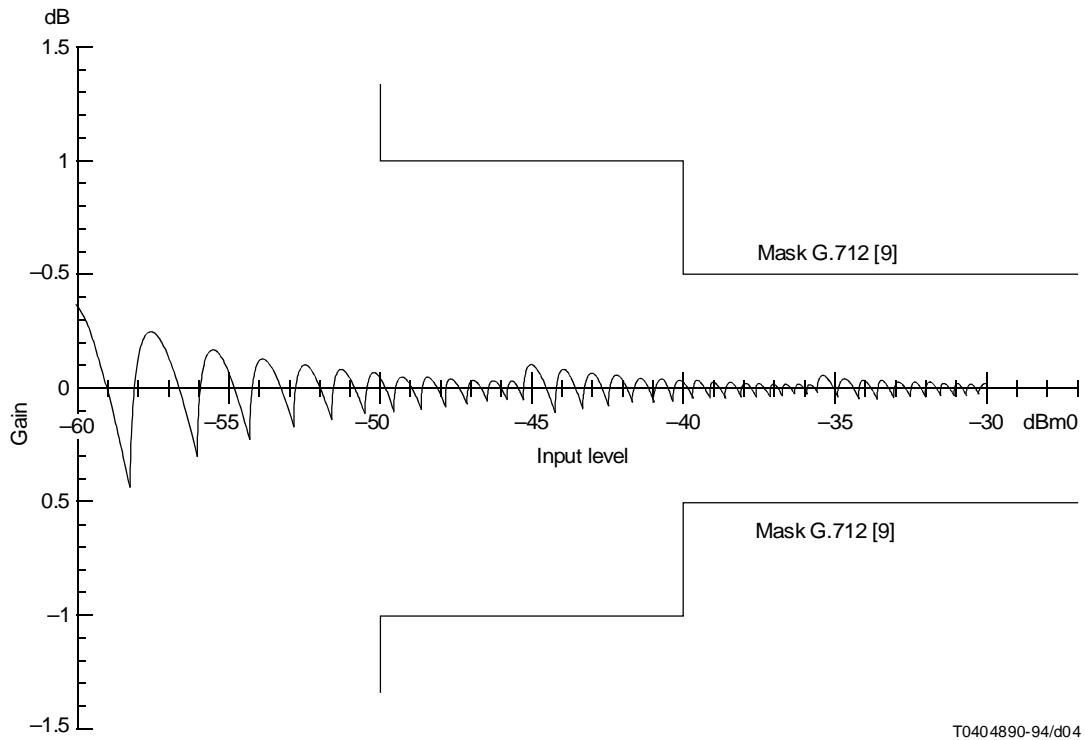

T0404890-94/d04

FIGURE A.3/O.133

Variation of gain with input level, μ -law, selective measurement

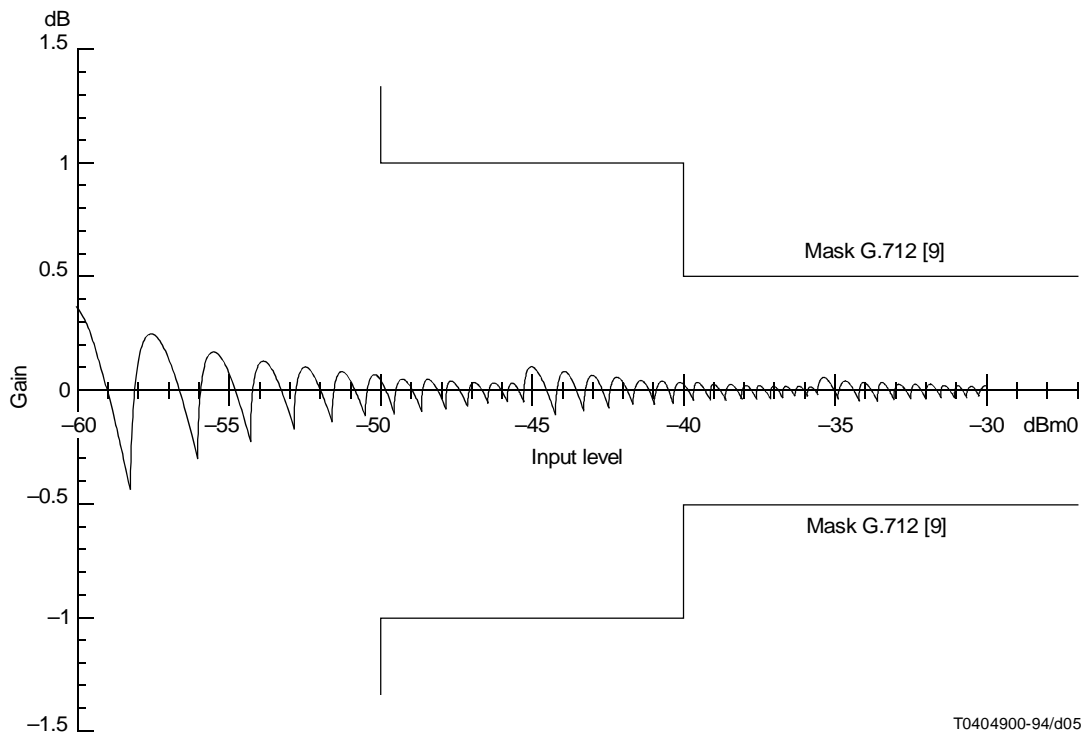

T0404900-94/d05

FIGURE A.4/O.133

Variation of gain with input level, μ -law, wideband measurement

TABLE A.1/O.133

Variation of gain with input level, A-law.
Gain calculation based on a selective measurement of the stimulus

Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)
2.948	0.009	-9.093	0.009	-21.135	0.009	-33.176	0.008
2.864	0.018	-9.177	-0.018	-21.218	-0.018	-33.259	-0.019
2.666	0.009	-9.375	0.009	-21.417	0.009	-33.458	0.009
2.579	-0.019	-9.462	-0.019	-21.503	-0.019	-33.544	-0.020
2.374	0.010	-9.667	0.010	-21.708	0.010	-33.749	0.009
2.285	-0.020	-9.756	-0.020	-21.797	-0.020	-33.839	-0.021
2.073	0.010	-9.969	0.010	-22.010	0.010	-34.051	0.010
1.980	-0.021	-10.061	-0.021	-22.102	-0.021	-34.143	-0.022
1.760	0.011	-10.281	0.011	-22.322	0.011	-34.363	0.010
1.664	-0.022	-10.377	-0.022	-22.418	-0.022	-34.459	-0.023
1.436	0.012	-10.605	0.012	-22.647	0.012	-34.688	0.011
1.336	-0.024	-10.705	-0.024	-22.746	-0.024	-34.787	-0.025
1.099	0.012	-10.942	0.012	-22.983	0.012	-35.024	0.011
0.996	-0.025	-11.045	-0.025	-23.087	-0.025	-35.128	-0.026
0.749	0.013	-11.293	0.013	-23.334	0.013	-35.375	0.012
0.641	-0.027	-11.400	-0.027	-23.441	-0.027	-35.482	-0.028
0.383	0.014	-11.658	0.014	-23.699	0.014	-35.740	0.013
0.272	-0.028	-11.770	-0.028	-23.811	-0.028	-35.852	-0.030
0.002	0.015	-12.039	0.015	-24.080	0.015	-36.121	0.014
-0.115	-0.030	-12.156	-0.030	-24.197	-0.030	-36.238	-0.032
-0.396	0.017	-12.438	0.017	-24.479	0.017	-36.520	0.015
-0.519	-0.032	-12.560	-0.032	-24.601	-0.032	-36.642	-0.034
-0.814	0.018	-12.856	0.018	-24.897	0.018	-36.937	0.016
-0.942	-0.034	-12.984	-0.034	-25.025	-0.034	-37.066	-0.036
-1.254	0.020	-13.295	0.020	-25.336	0.020	-37.376	0.017
-1.388	-0.036	-13.429	-0.036	-25.470	-0.036	-37.512	-0.039
-1.716	0.023	-13.758	0.023	-25.799	0.023	-37.838	0.019
-1.858	-0.038	-13.899	-0.038	-25.940	-0.038	-37.981	-0.043
-2.206	0.026	-14.248	0.026	-26.289	0.026	-38.327	0.020
-2.354	-0.040	-14.395	-0.040	-26.436	-0.040	-38.478	-0.047
-2.741	0.035	-14.782	0.035	-26.824	0.035	-38.844	0.022
-2.881	-0.018	-14.922	-0.018	-26.963	-0.018	-39.004	-0.051
-3.073	0.009	-15.114	0.009	-27.155	0.009	-39.394	0.024
-3.156	-0.018	-15.198	-0.018	-27.239	-0.018	-39.565	-0.056
-3.355	0.009	-15.396	0.009	-27.437	0.009	-39.982	0.027
-3.441	-0.019	-15.482	-0.019	-27.524	-0.019	-40.164	-0.062
-3.646	0.010	-15.688	0.010	-27.729	0.010	-40.612	0.030
-3.736	-0.020	-15.777	-0.020	-27.818	-0.020	-40.808	-0.070
-3.948	0.010	-15.989	0.010	-28.030	0.010	-41.291	0.034
-4.040	-0.021	-16.082	-0.021	-28.123	-0.021	-41.503	-0.079
-4.261	0.011	-16.302	0.011	-28.343	0.011	-42.029	0.038
-4.356	-0.022	-16.398	-0.022	-28.439	-0.022	-42.259	-0.090
-4.585	0.012	-16.626	0.012	-28.667	0.012	-42.834	0.044
-4.684	-0.024	-16.725	-0.024	-28.767	-0.024	-43.087	-0.104
-4.922	0.012	-16.963	0.012	-29.004	0.012	-43.723	0.051
-5.025	-0.025	-17.066	-0.025	-29.107	-0.025	-44.002	-0.122
-5.272	0.013	-17.313	0.013	-29.354	0.013	-44.713	0.061
-5.379	-0.027	-17.421	-0.027	-29.462	-0.027	-45.025	-0.146
-5.637	0.014	-17.678	0.014	-27.719	0.014	-45.831	0.074
-5.749	-0.028	-17.790	-0.028	-29.831	-0.028	-46.185	-0.178
-6.018	0.015	-18.059	0.015	-30.101	0.015	-47.114	0.092
-6.135	-0.030	-18.176	-0.030	-30.218	-0.030	-47.524	-0.226
-6.417	0.017	-18.458	0.017	-30.499	0.017	-48.623	0.119
-6.539	-0.032	-18.580	-0.032	-30.622	-0.032	-49.107	-0.299
-6.835	0.018	-18.876	0.018	-30.917	0.018	-50.451	0.162
-6.963	-0.034	-19.004	-0.034	-31.045	-0.034	-51.045	-0.423
-7.274	0.020	-19.315	0.020	-31.356	0.020	-52.775	0.240
-7.409	-0.036	-19.450	-0.036	-31.491	-0.036	-53.544	-0.668
-7.737	0.023	-19.778	0.023	-31.819	0.022	-55.976	0.408
-7.878	-0.038	-19.919	-0.038	-31.961	-0.039	-57.066	-1.312
-8.227	0.026	-20.268	0.026	-32.309	0.026		
-8.375	-0.040	-20.416	-0.040	-32.457	-0.040		
-8.762	0.035	-20.803	0.035	-32.844	0.035		
-8.901	-0.018	-20.942	-0.018	-32.984	-0.018		

TABLE A.2/O.133

Variation of gain with input level, A-law.
Gain calculation based on a wideband measurement of the stimulus

Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)
2.947	0.009	-9.094	0.009	-21.135	0.009	-33.176	0.009
2.864	-0.018	-9.177	-0.018	-21.218	-0.018	-33.259	-0.018
2.665	0.010	-9.376	0.010	-21.417	0.010	-33.458	0.010
2.579	-0.019	-9.462	-0.019	-21.503	-0.019	-33.544	-0.019
2.374	0.010	-9.668	0.010	-21.709	0.010	-33.750	0.010
2.285	-0.020	-9.756	-0.020	-21.797	-0.020	-33.839	-0.020
2.072	0.011	-9.969	0.011	-22.010	0.011	-34.052	0.011
1.980	-0.021	-10.061	-0.021	-22.102	-0.021	-34.143	-0.021
1.759	0.012	-10.282	0.012	-22.323	0.012	-34.364	0.011
1.664	-0.022	-10.377	-0.022	-22.418	-0.022	-34.459	-0.022
1.435	0.012	-10.606	0.012	-22.647	0.012	-34.688	0.012
1.336	-0.023	-10.705	-0.023	-22.746	-0.023	-34.787	-0.023
1.098	0.013	-10.943	0.013	-22.984	0.013	-35.025	0.013
0.996	-0.024	-11.045	-0.024	-23.087	-0.024	-35.128	-0.025
0.748	0.014	-11.293	0.014	-23.334	0.014	-35.376	0.013
0.641	-0.026	-11.400	-0.026	-23.441	-0.026	-35.482	-0.026
0.383	0.015	-11.658	0.015	-23.700	0.015	-35.741	0.014
0.272	-0.027	-11.770	-0.027	-23.811	-0.027	-35.852	-0.028
0.001	0.016	-12.040	0.016	-24.081	0.016	-36.122	0.015
-0.115	-0.029	-12.156	-0.029	-24.197	-0.029	-36.238	-0.030
-0.397	0.018	-12.439	0.018	-24.480	0.018	-36.521	0.016
-0.519	-0.031	-12.560	-0.031	-24.601	-0.031	-36.642	-0.032
-0.815	0.019	-12.857	0.019	-24.898	0.019	-36.938	0.018
-0.942	-0.033	-12.984	-0.033	-25.025	-0.033	-37.066	-0.034
-1.255	0.021	-13.296	0.021	-25.337	0.021	-37.378	0.019
-1.388	-0.035	-13.429	-0.035	-25.470	-0.035	-37.512	-0.037
-1.718	0.024	-13.759	0.024	-25.800	0.024	-37.840	0.021
-1.858	-0.037	-13.899	-0.037	-25.940	-0.037	-37.981	-0.040
-2.208	0.027	-14.249	0.027	-26.290	0.027	-38.328	0.023
-2.354	-0.038	-14.395	-0.038	-26.436	-0.038	-38.478	-0.044
-2.742	0.036	-14.783	0.036	-26.825	0.036	-38.846	0.025
-2.881	-0.017	-14.922	-0.017	-26.963	-0.017	-39.004	-0.048
-3.073	0.009	-15.114	0.009	-27.156	0.009	-39.396	0.028
-3.156	-0.018	-15.198	-0.018	-27.239	-0.018	-39.565	-0.053
-3.355	0.010	-15.397	0.010	-27.438	0.010	-39.984	0.031
-3.441	-0.019	-15.482	-0.019	-27.524	-0.019	-40.164	-0.058
-3.647	0.010	-15.688	0.010	-27.729	0.010	-40.615	0.034
-3.736	-0.020	-15.777	-0.020	-27.818	-0.020	-40.808	-0.065
-3.949	0.011	-15.990	0.011	-28.031	0.011	-41.295	0.039
-4.040	-0.021	-16.082	-0.021	-28.123	-0.021	-41.503	-0.073
-4.261	0.012	-16.302	0.012	-28.344	0.012	-42.033	0.044
-4.356	-0.022	-16.398	-0.022	-28.439	-0.022	-42.259	-0.083
-4.585	0.012	-16.627	0.012	-28.668	0.012	-42.839	0.051
-4.684	-0.023	-16.725	-0.023	-28.767	-0.023	-43.087	-0.095
-4.922	0.013	-16.963	0.013	-29.005	0.013	-43.729	0.060
-5.025	-0.024	-17.066	-0.024	-29.107	-0.024	-44.002	-0.111
-5.273	0.014	-17.314	0.014	-29.355	0.014	-44.720	0.072
-5.379	-0.026	-17.421	-0.026	-29.462	-0.026	-45.025	-0.132
-5.638	0.015	-17.679	0.015	-29.720	0.015	-45.840	0.088
-5.749	-0.027	-17.790	-0.027	-29.831	-0.027	-46.185	-0.161
-6.019	0.016	-18.060	0.016	-30.102	0.016	-47.128	0.111
-6.135	-0.029	-18.176	-0.029	-30.218	-0.029	-47.524	-0.202
-6.418	0.018	-18.459	0.018	-30.500	0.018	-48.642	0.146
-6.539	-0.031	-18.580	-0.031	-30.622	-0.031	-49.107	-0.263
-6.836	0.019	-18.877	0.019	-30.918	0.019	-50.480	0.203
-6.963	-0.033	-19.004	-0.033	-31.045	-0.033	-51.045	-0.365
-7.275	0.021	-19.316	0.021	-31.358	0.021	-52.827	0.310
-7.409	-0.035	-19.450	-0.035	-31.491	-0.035	-53.544	-0.556
-7.738	0.024	-19.779	0.024	-31.821	0.023	-56.086	0.554
-7.878	-0.037	-19.919	-0.037	-31.961	-0.037	-57.066	-1.015
-8.228	0.027	-20.269	0.027	-32.311	0.027		
-8.375	-0.038	-20.416	-0.038	-32.457	-0.039		
-8.763	0.036	-20.804	0.036	-32.845	0.036		
-8.901	-0.017	-20.942	-0.017	-32.984	-0.017		

TABLE A.3/O.133

Variation of gain with input level, μ -law.
Gain calculation based on a selective measurement of the stimulus

Inputlevel (dBm0)	Gain (dB)	Inputlevel (dBm0)	Gain (dB)	Inputlevel (dBm0)	Gain (dB)	Inputlevel (dBm0)	Gain (dB)
2.977	0.009	-9.173	0.009	-21.662	0.010	-35.769	0.014
2.893	-0.018	-9.258	-0.019	-21.751	-0.020	-35.882	-0.030
2.694	0.009	-9.459	0.010	-21.964	0.010	-36.154	0.015
2.607	-0.019	-9.547	-0.020	-22.057	-0.021	-36.272	-0.032
2.401	0.010	-9.756	0.010	-22.277	0.011	-36.557	0.016
2.311	-0.020	-9.847	-0.021	-22.373	-0.023	-36.681	-0.034
2.098	0.010	-10.063	0.011	-22.602	0.012	-36.980	0.017
2.005	-0.021	-10.157	-0.022	-22.702	-0.024	-37.110	-0.036
1.784	0.011	-10.382	0.011	-22.940	0.012	-37.425	0.018
1.668	-0.023	-10.479	-0.023	-23.043	-0.025	-37.562	-0.039
1.458	0.012	-10.712	0.012	-23.291	0.013	-37.893	0.020
1.358	-0.024	-10.814	-0.024	-23.399	-0.027	-38.038	-0.043
1.120	0.013	-11.056	0.013	-23.657	0.014	-38.388	0.022
1.016	-0.025	-11.161	-0.026	-23.769	-0.029	-38.541	-0.046
0.767	0.013	-11.414	0.014	-24.039	0.015	-38.914	0.024
0.660	-0.027	-11.524	-0.027	-24.157	-0.030	-37.076	-0.051
0.400	0.014	-11.787	0.015	-23.439	0.016	-39.473	0.027
0.288	-0.028	-11.902	-0.029	-25.562	-0.032	-39.646	-0.056
0.017	0.016	-12.177	0.016	-24.858	0.018	-40.071	0.030
-0.101	-0.030	-12.297	-0.031	-24.987	-0.035	-40.255	-0.062
-0.384	0.017	-12.585	0.017	-25.299	0.019	-40.713	0.034
-0.507	-0.032	-12.711	-0.033	-25.434	-0.037	-40.911	-0.069
-0.805	0.018	-13.014	0.019	-25.763	0.021	-41.406	0.039
-0.934	-0.034	-13.145	-0.035	-25.905	-0.040	-41.621	-0.077
-1.247	0.020	-13.465	0.021	-26.253	0.024	-42.160	0.045
-1.382	-0.036	-13.603	-0.038	-26.403	-0.043	-42.393	-0.087
-1.713	0.023	-13.941	0.024	-26.773	0.027	-42.986	0.054
-1.855	-0.039	-14.086	-0.040	-26.932	-0.046	-43.241	-0.098
-2.206	0.026	-14.446	0.027	-27.327	0.032	-43.902	0.067
-2.355	-0.040	-14.598	-0.041	-27.495	-0.048	-44.181	-0.110
-2.745	0.036	-14.997	0.037	-27.938	0.043	-44.959	0.099
-2.886	-0.018	-15.141	-0.018	-28.097	-0.022	-45.236	-0.054
-3.080	0.009	-15.340	0.009	-28.318	0.011	-45.639	0.026
-3.164	-0.019	-15.426	-0.019	-28.414	-0.023	-45.815	-0.059
-3.364	0.009	-15.632	0.010	-28.643	0.011	-46.247	0.028
-3.451	-0.020	-15.721	-0.020	-28.743	-0.024	-46.435	-0.066
-3.658	0.010	-15.934	0.010	-28.982	0.012	-46.901	0.032
-3.748	-0.021	-16.026	-0.021	-29.086	-0.026	-47.104	-0.074
-3.963	0.010	-16.247	0.011	-29.334	0.013	-47.608	0.036
-4.056	-0.022	-16.343	-0.023	-29.442	-0.027	-47.828	-0.084
-4.278	0.011	-16.571	0.012	-29.701	0.014	-43.378	0.041
-4.375	-0.023	-16.671	-0.024	-29.814	-0.029	-48.618	-0.096
-4.605	0.012	-16.908	0.012	-30.084	0.015	-49.223	0.047
-4.706	-0.024	-17.012	-0.025	-30.202	-0.031	-49.488	-0.112
-4.946	0.013	-17.259	0.013	-30.485	0.016	-50.159	0.056
-5.050	-0.025	-17.367	-0.027	-30.608	-0.033	-50.454	-0.133
-5.300	0.014	-17.625	0.014	-30.906	0.017	-51.209	0.067
-5.408	-0.027	-17.737	-0.028	-31.035	-0.035	-51.541	-0.161
-5.669	0.015	-18.007	0.015	-31.347	0.019	-52.404	0.082
-5.782	-0.029	-18.124	-0.030	-31.483	-0.038	-52.784	-0.200
-6.054	0.016	-18.406	0.017	-31.813	0.021	-53.791	0.104
-6.172	-0.030	-18.528	-0.032	-31.956	-0.041	-54.235	-0.258
-6.458	0.017	-18.824	0.018	-32.305	0.023	-55.444	0.138
-6.581	-0.032	-18.953	-0.034	-32.456	-0.044	-55.978	-0.352
-6.881	0.019	-19.264	0.020	-32.826	0.025	-57.490	0.195
-7.011	-0.035	-19.399	-0.037	-32.987	-0.048	-58.161	-0.522
-7.326	0.021	-19.727	0.022	-33.381	0.029		
-7.462	-0.037	-19.869	-0.039	-33.552	-0.053		
-7.795	0.023	-20.217	0.025	-33.975	0.053		
-7.938	-0.039	-20.367	-0.042	-34.156	-0.057		
-8.292	0.027	-20.737	0.029	-34.613	0.039		
-8.442	-0.040	-20.894	-0.044	-34.806	-0.060		
-8.836	0.036	-21.307	0.039	-35.323	0.054		
-8.977	-0.018	-21.456	-0.019	-35.508	-0.028		

TABLE A.4/O.133

Variation of gain with input level, μ -law.
Gain calculation based on a wideband measurement of the stimulus

Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)	Input level (dBm0)	Gain (dB)
2.977	0.009	-9.173	0.010	-21.662	0.010	-35.769	0.015
2.893	-0.018	-9.258	-0.018	-21.751	-0.020	-35.882	-0.028
2.693	0.010	-9.460	0.010	-21.965	0.011	-36.155	0.016
2.607	-0.019	-9.547	-0.019	-22.057	-0.021	-36.272	-0.030
2.400	0.010	-9.757	0.011	-22.278	0.012	-36.558	0.017
2.311	-0.020	-9.847	-0.020	-22.373	-0.022	-36.681	-0.032
2.097	0.011	-10.064	0.011	-22.603	0.012	-36.981	0.018
2.005	-0.021	-10.157	-0.021	-22.702	-0.023	-37.110	-0.035
1.783	0.012	-10.382	0.012	-22.940	0.013	-37.426	0.020
1.668	-0.022	-10.479	-0.022	-23.043	-0.024	-37.562	-0.037
1.458	0.012	-10.713	0.013	-23.292	0.014	-37.895	0.022
1.358	-0.023	-10.814	-0.024	-23.399	-0.026	-38.038	-0.041
1.119	0.013	-11.057	0.014	-23.658	0.015	-38.390	0.024
1.016	-0.024	-11.161	-0.025	-23.769	-0.028	-38.541	-0.044
0.767	0.014	-11.415	0.015	-23.040	0.016	-38.916	0.026
0.660	-0.026	-11.524	-0.026	-24.157	-0.029	-37.096	-0.048
0.400	0.015	-11.788	0.016	-24.440	0.017	-39.475	0.029
0.288	-0.027	-11.902	-0.028	-24.562	-0.031	-39.646	-0.053
0.016	0.016	-12.178	0.017	-24.859	0.019	-40.073	0.033
-0.101	-0.029	-12.297	-0.030	-24.987	-0.034	-40.255	-0.058
-0.385	0.018	-12.586	0.018	-25.300	0.021	-40.715	0.037
-0.507	-0.031	-12.711	-0.032	-25.434	-0.036	-40.911	-0.065
-0.806	0.019	-13.015	0.020	-25.764	0.023	-41.409	0.042
-0.934	-0.033	-13.145	-0.034	-25.905	-0.039	-41.621	-0.073
-1.248	0.021	-13.466	0.022	-26.254	0.025	-42.163	0.049
-1.382	-0.035	-13.603	-0.036	-26.403	-0.042	-42.393	-0.082
-1.714	0.024	-13.942	0.025	-26.775	0.028	-42.990	0.058
-1.855	-0.038	-14.086	-0.039	-26.932	-0.045	-43.241	-0.093
-2.208	0.027	-14.447	0.028	-27.329	0.033	-43.907	0.072
-2.355	-0.039	-14.598	-0.040	-27.495	-0.047	-44.181	-0.104
-2.746	0.036	-14.998	0.038	-27.939	0.044	-44.963	0.104
-2.886	-0.017	-15.141	-0.018	-28.097	-0.021	-45.236	-0.050
-3.080	0.009	-15.340	0.010	-28.318	0.012	-45.641	0.029
-3.164	-0.018	-15.426	-0.019	-28.414	-0.022	-45.815	-0.055
-3.365	0.010	-15.632	0.010	-28.644	0.012	-46.249	0.032
-3.451	-0.019	-15.721	-0.020	-28.743	-0.023	-46.435	-0.061
-3.659	0.011	-15.934	0.011	-28.983	0.013	-46.904	0.036
-3.748	-0.020	-16.026	-0.021	-29.086	-0.025	-47.104	-0.069
-3.963	0.011	-16.247	0.012	-29.335	0.014	-47.611	0.041
-4.056	-0.021	-16.343	-0.022	-29.442	-0.026	-47.828	-0.078
-4.279	0.012	-16.572	0.012	-29.702	0.015	-48.382	0.047
-4.375	-0.022	-16.671	-0.023	-29.814	-0.028	-48.618	-0.089
-4.606	0.013	-16.909	0.013	-30.085	0.016	-49.228	0.055
-4.706	-0.023	-17.012	-0.024	-30.202	-0.030	-49.488	-0.103
-4.946	0.013	-17.260	0.014	-30.486	0.017	-50.166	0.065
-5.050	-0.025	-17.367	-0.026	-30.608	-0.032	-50.454	-0.121
-5.300	0.014	-17.626	0.015	-30.907	0.019	-51.218	0.079
-5.408	-0.026	-17.737	-0.027	-31.035	-0.034	-51.541	-0.145
-5.670	0.015	-18.007	0.016	-31.349	0.020	-52.416	0.098
-5.782	-0.028	-18.124	-0.029	-31.483	-0.037	-52.784	-0.179
-6.055	0.017	-18.407	0.018	-31.814	0.022	-53.807	0.126
-6.172	-0.029	-18.528	-0.031	-31.956	-0.039	-54.235	-0.229
-6.459	0.018	-18.825	0.019	-32.306	0.024	-55.467	0.170
-6.581	-0.031	-18.953	-0.033	-32.456	-0.043	-55.978	-0.307
-6.882	0.020	-19.265	0.021	-32.828	0.027	-57.529	0.247
-7.011	-0.033	-19.399	-0.036	-32.987	-0.046	-58.161	-0.444
-7.327	0.022	-19.729	0.023	-33.383	0.030		
-7.462	-0.036	-19.869	-0.038	-33.552	-0.050		
-7.796	0.024	-20.219	0.026	-33.976	0.035		
-7.938	-0.038	-20.367	-0.041	-34.156	-0.055		
-8.294	0.028	-20.739	0.030	-34.615	0.041		
-8.442	-0.039	-20.894	-0.042	-34.806	-0.058		
-8.837	0.037	-21.309	0.040	-35.325	0.056		
-8.977	-0.017	-21.456	-0.019	-35.508	-0.027		

A.3 Quantizing distortion measurements


The quantizing error results in quantizing distortion which varies as function of input level. Figures A.5 and A.6 illustrate the (calculated) quantizing distortion characteristics for the A- and μ -law when measuring a PCM-channel with a sinusoidal stimulus. As with gain measurements, the quantizing distortion ratio can vary substantially as a result of small variations of the input signal. The variation ratio reaches its maximum at the segment end points.

For the same reason as described above, one can again only refer to the envelope of the variation of the quantizing distortion ratio when interpreting individual measurement results. The warning with respect to quantizing threshold errors in a non-ideal encoder applies to quantizing distortion ratio measurements as well.

Tables A.5 and A.6 contain the extreme values of the quantizing distortion ratio of an ideal encoder when measured with a sinusoidal signal. In the tables, "level" is the input level; S/Q is the ratio of the corresponding level (at the output) of the stimulus, measured selectively, to the quantizing noise, measured flat and with a fixed correction to normalize the noise bandwidth to 3.1 kHz.


NOTE – Tables A.5 and A.6 and their accompanying graphs are mainly indicative, since:

- 1) the calculations (flat S/Q) do not compare with the weighted ratio $(S+Q)/Q$ result of the method of Recommendation O.132 [13]. They are more similar to the use of a tone stimulus with the filters of Recommendation O.131 [12];
- 2) the correction to the 3.1 kHz bandwidth assumes the quantizing noise spectrum is flat, whereas it is non-flat and level-dependent (so that no fixed correction will compensate for the lost bandwidth of the stimulus rejection filter).

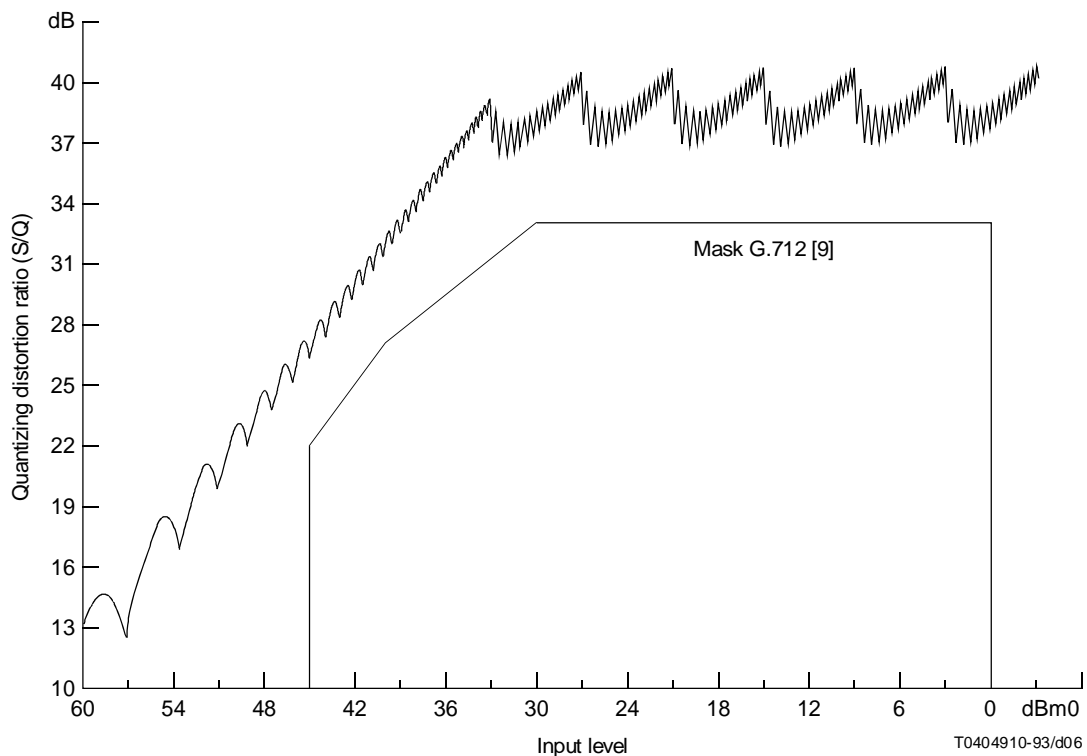

NOTE – The calculation simulates a selective measurement of the stimulus S at the output of the object under test.

FIGURE A.5/O.133
Quantizing distortion ratio, A-law

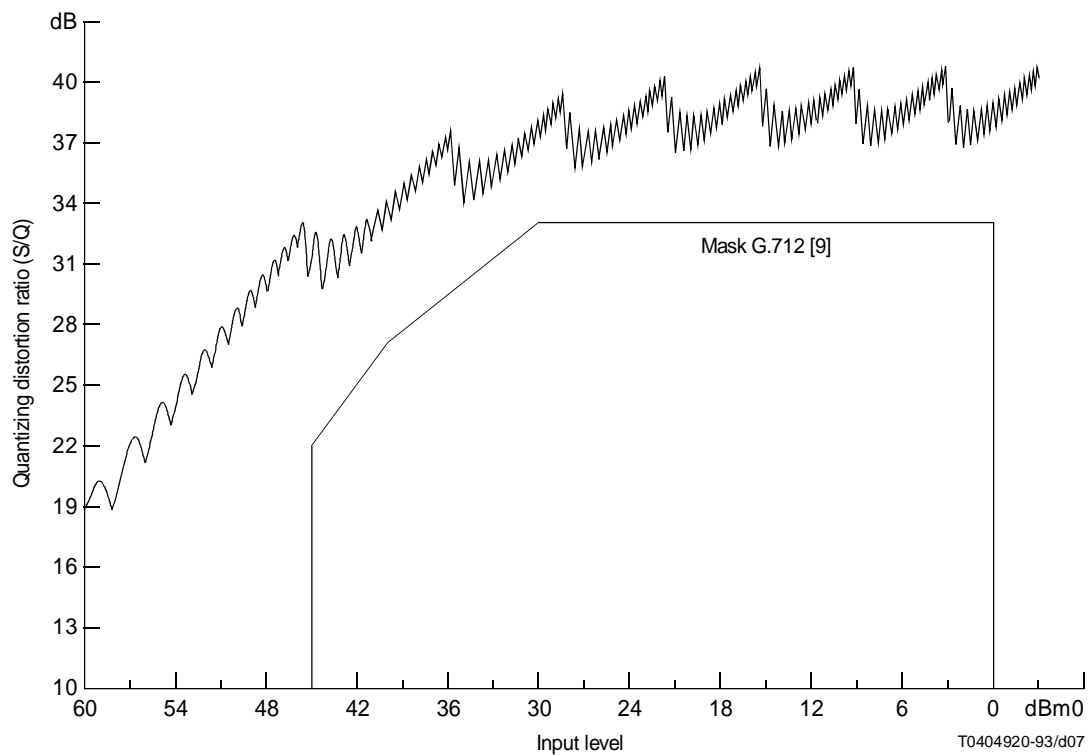

NOTE – The calculation simulates a selective measurement of the stimulus S at the output of the object under test.

FIGURE A.6/O.133
Quantizing distortion ratio, μ -law

TABLE A.5/O.133

Quantizing distortion ratio, A-law

Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)
3.050	40.768	-8.991	40.767	-21.032	40.739	-33.070	39.178
2.879	39.769	-9.162	39.769	-21.203	39.745	-33.246	38.390
2.771	40.565	-9.270	40.565	-21.311	40.535	-33.348	38.904
2.595	39.537	-9.446	39.537	-21.488	39.512	-33.531	38.100
2.483	40.361	-9.558	40.361	-21.599	40.329	-33.636	38.621
2.301	39.301	-9.740	39.301	-21.781	39.275	-33.825	37.800
2.185	40.156	-9.856	40.155	-21.897	40.122	-33.934	38.328
1.997	39.061	-10.044	39.061	-22.086	39.033	-34.130	37.490
1.877	39.950	-10.165	39.949	-22.206	39.914	-34.242	38.025
1.682	38.817	-10.360	38.817	-22.401	38.788	-34.445	37.168
1.557	39.744	-10.485	39.744	-22.526	39.706	-34.561	37.711
1.354	38.570	-10.687	38.569	-22.728	38.539	-34.773	36.834
1.224	39.541	-10.817	39.541	-22.858	39.501	-34.893	37.386
1.014	38.320	-11.027	38.320	-23.068	38.287	-35.113	36.487
0.879	39.343	-11.162	39.342	-23.204	39.299	-35.238	37.047
0.661	38.070	-11.380	38.069	-23.422	38.034	-35.467	36.126
0.519	39.153	-11.522	39.152	-23.563	39.105	-35.597	36.694
0.292	37.820	-11.749	37.819	-23.790	37.782	-35.836	35.749
0.143	38.976	-11.898	38.975	-23.939	38.924	-35.971	36.327
-0.093	37.575	-12.134	37.574	-24.175	37.534	-36.222	35.355
-0.250	38.819	-12.291	38.819	-24.332	38.762	-36.362	35.943
-0.496	37.339	-12.537	37.339	-24.578	37.295	-36.626	34.942
-0.661	38.697	-12.702	38.696	-24.743	38.633	-36.772	35.541
-0.918	37.122	-12.959	37.122	-25.000	37.073	-37.049	34.509
-1.094	38.631	-13.135	38.630	-25.176	38.558	-37.202	35.119
-1.361	36.941	-13.403	36.940	-25.444	36.887	-37.494	34.054
-1.549	38.665	-13.591	38.664	-25.632	38.579	-37.655	34.676
-1.828	36.831	-13.870	36.831	-25.911	36.767	-37.963	33.574
-2.032	38.907	-14.073	38.906	-26.114	38.800	-38.132	34.208
-2.320	36.893	-14.362	36.891	-26.403	36.817	-38.460	33.066
-2.552	39.774	-14.593	39.771	-26.634	39.618	-38.638	33.714
-2.811	37.910	-14.852	37.908	-26.894	37.798	-38.986	32.526
-2.971	40.768	-15.012	40.764	-27.053	40.542	-39.174	33.189
-3.141	39.769	-15.183	39.766	-27.224	39.578	-39.546	31.952
-3.249	40.565	-15.291	40.562	-27.331	40.328	-39.746	32.631
-3.426	39.537	-15.467	39.534	-27.508	39.337	-40.145	31.337
-3.537	40.361	-15.579	40.357	-27.619	40.111	-40.357	32.033
-3.720	39.301	-15.761	39.298	-27.802	39.091	-40.789	30.676
-3.835	40.156	-15.877	40.151	-27.917	39.891	-41.016	31.391
-4.024	39.061	-16.065	39.058	-28.107	38.841	-41.485	29.960
-4.144	39.950	-16.185	39.945	-28.226	39.669	-41.728	30.697
-4.339	38.817	-16.380	38.814	-28.422	38.585	-42.251	29.183
-4.464	39.744	-16.505	39.740	-28.546	39.446	-42.504	29.941
-4.666	38.570	-16.707	38.566	-28.749	38.324	-43.075	28.326
-4.796	39.541	-16.837	39.536	-28.878	39.223	-43.356	29.113
-5.006	38.320	-17.047	38.316	-29.089	38.059	-44.002	27.353
-5.142	39.343	-17.183	39.338	-29.223	39.000	-44.301	28.195
-5.360	38.070	-17.401	38.065	-29.443	37.792	-45.025	26.277
-5.502	39.153	-17.543	39.147	-29.583	38.782	-45.361	27.168
-5.729	37.820	-17.770	37.815	-29.811	37.522	-46.185	25.051
-5.877	38.976	-17.919	38.969	-29.959	38.571	-46.569	25.999
-6.113	37.575	-18.155	37.570	-30.197	37.253	-47.524	23.623
-6.270	38.819	-18.311	38.812	-30.351	38.374	-47.973	24.645
-6.516	37.339	-18.557	37.334	-30.599	36.990	-49.108	21.914
-6.682	38.697	-18.723	38.689	-30.763	38.200	-49.649	23.034
-6.938	37.122	-18.980	37.116	-31.022	36.738	-51.046	19.779
-7.114	38.631	-19.155	38.622	-31.195	38.065	-51.729	21.045
-7.382	36.941	-19.423	36.934	-31.465	36.513	-53.545	16.935
-7.570	38.665	-19.611	38.655	-31.651	38.004	-54.477	18.438
-7.849	36.831	-19.890	36.824	-31.933	36.343	-57.066	12.603
-8.053	38.907	-20.094	38.894	-32.133	38.093	-58.554	14.638
-8.341	36.892	-20.382	36.883	-32.425	36.309		
-8.572	39.774	-20.613	39.754	-32.652	38.628		
-8.832	37.910	-20.873	37.896	-32.916	37.064		

NOTE – The stimulus *S* is measured selectively at the output of the test object. The quantizing products *Q* are measured with an effective noise bandwidth of 3.1 kHz.

TABLE A.6/O.133

Quantizing distortion ratio, μ -law

Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)	Input level (dBm0)	S/Q (dB)
3.080	40.722	-9.069	40.585	-21.552	40.016	-35.627	37.431
2.908	39.723	-9.242	39.583	-21.735	39.006	-35.864	36.366
2.800	40.519	-9.352	40.376	-21.850	39.789	-36.006	37.104
2.623	39.490	-9.532	39.345	-22.040	38.748	-36.254	36.003
2.510	40.313	-9.645	40.166	-22.159	39.558	-36.402	36.764
2.327	39.252	-9.831	39.301	-22.356	38.485	-36.662	35.625
2.211	40.106	-9.948	39.953	-22.480	39.324	-36.817	36.413
2.022	39.010	-10.141	38.856	-22.684	38.215	-37.090	35.232
1.901	39.898	-10.263	39.740	-22.813	39.087	-37.253	36.049
1.705	38.764	-10.462	38.604	-23.025	37.939	-37.541	34.821
1.580	39.691	-10.589	39.527	-23.159	38.849	-37.712	35.671
1.376	38.515	-10.796	38.349	-23.380	37.657	-38.016	34.391
1.246	39.486	-10.928	39.316	-23.520	38.610	-38.197	35.279
1.035	38.263	-11.142	38.090	-23.750	37.370	-38.519	33.941
0.898	39.825	-11.281	39.109	-23.896	38.373	-38.711	34.873
0.679	38.010	-11.504	37.830	-24.136	37.079	-35.052	33.469
0.536	39.092	-11.649	38.908	-24.290	38.141	-39.257	34.454
0.308	37.758	-11.881	37.570	-24.540	36.786	-39.621	32.975
0.159	38.912	-12.033	38.720	-24.702	37.918	-39.840	34.023
-0.079	37.510	-12.275	37.314	-24.964	36.492	-40.229	32.457
-0.236	38.753	-12.435	38.553	-25.135	37.711	-40.465	33.582
-0.484	37.272	-12.687	37.066	-25.409	36.204	-40.883	31.914
-0.650	38.628	-12.857	38.417	-25.591	37.533	-41.139	33.141
-0.909	37.051	-13.120	36.836	-25.879	35.928	-41.590	31.351
-1.086	38.558	-13.300	38.337	-26.073	37.405	-41.871	32.713
-1.355	36.867	-13.576	36.640	-26.375	35.682	-42.360	30.775
-1.545	38.589	-13.769	38.355	-25.584	37.371	-42.671	32.335
-1.826	36.753	-14.056	36.513	-26.900	35.500	-43.203	30.212
-2.031	38.826	-14.266	38.579	-27.128	37.534	-43.557	32.102
-2.321	36.809	-14.563	36.556	-27.458	35.480	-44.134	29.751
-2.554	39.688	-14.801	39.425	-27.719	38.307	-44.559	32.424
-2.816	37.822	-15.070	37.554	-28.018	36.411	-45.106	30.244
-2.976	40.677	-15.234	40.398	-28.199	39.212	-45.411	32.915
-3.149	39.677	-15.411	39.394	-28.398	38.188	-45.796	31.650
-3.258	40.471	-15.522	40.184	-28.520	38.956	-46.002	32.337
-3.436	39.442	-15.705	39.150	-28.726	37.901	-46.417	31.013
-3.548	40.264	-15.821	39.967	-28.854	38.695	-46.636	31.718
-3.732	39.203	-16.010	38.901	-29.068	37.605	-47.086	30.325
-3.849	40.055	-16.129	39.747	-29.201	38.428	-47.320	31.051
-4.039	38.959	-16.326	38.646	-29.424	37.301	-47.811	29.580
-4.160	39.846	-16.450	39.527	-29.562	38.155	-48.063	30.327
-4.357	38.711	-16.653	38.387	-29.795	36.987	-48.611	28.765
-4.483	39.636	-16.782	39.306	-29.939	37.878	-48.875	29.537
-4.668	38.460	-16.993	38.123	-30.182	36.665	-49.488	27.845
-4.819	39.429	-17.128	39.086	-30.334	37.598	-49.771	28.666
-5.031	38.206	-17.348	37.856	-30.588	36.334	-50.454	26.831
-5.168	39.226	-17.489	38.869	-30.747	37.315	-50.770	27.697
-5.388	37.951	-17.717	37.586	-31.013	35.994	-51.541	25.684
-5.532	39.031	-17.865	38.658	-31.181	37.032	-51.900	26.603
-5.761	37.696	-18.103	37.315	-31.460	35.647	-52.784	24.365
-5.912	38.849	-18.258	38.459	-31.638	36.753	-53.198	25.349
-6.151	37.445	-18.506	37.047	-31.932	35.295	-54.235	22.808
-6.309	38.687	-18.670	38.279	-32.120	36.485	-54.726	23.878
-6.558	37.204	-18.929	36.786	-32.430	34.941	-55.978	20.910
-6.726	38.558	-19.102	38.130	-32.631	36.239	-56.582	22.098
-6.986	36.980	-19.374	36.541	-32.959	34.593	-58.161	18.473
-7.164	38.485	-19.558	38.035	-33.175	36.034	-58.949	19.842
-7.435	36.792	-19.842	36.330	-33.521	34.265		
-7.626	38.512	-20.040	38.037	-33.756	35.913		
-7.909	36.674	-20.336	36.186	-34.122	33.991		
-8.116	38.745	-20.552	38.241	-34.381	35.978		
-8.408	36.725	-20.859	36.208	-34.766	33.865		
-8.643	39.601	-21.104	39.064	-35.065	36.635		
-8.907	37.733	-21.382	37.185	-35.418	33.687		

NOTE – The stimulus S is measured selectively at the output of the test object. The quantizing products Q are measured with an effective noise bandwidth of 3.1 kHz.

A.4 General notes to tables and graphs

The input levels are stated based on values of T_{max} of exactly 3.14 dBm0 for the A-law and 3.17 dBm0 for the μ -law. (On this basis, the selective levels of 1 kHz sequences of Recommendation G.711 [1] are -0.0016 dBm0 for the A-law and -0.0024 dBm0 for the μ -law.)

The envelope of a characteristic is a pair of smooth curves tangential to the characteristic at or near all its extreme values.

References

- [1] CCITT Recommendation *Pulse code modulation (PCM) of voice frequencies*, Rec. G.711.
- [2] CCITT Recommendation *Characteristics of primary PCM multiplex equipment operating at 2048 kbit/s*, Rec. G.732.
- [3] CCITT Recommendation *Characteristics of primary PCM multiplex equipment operating at 1544 kbit/s*, Rec. G.733.
- [4] CCITT Recommendation *Characteristics of 60-channel transmultiplexing equipments*, Rec. G.793.
- [5] CCITT Recommendation *Characteristics of 24-channel transmultiplexing equipments*, Rec. G.794.
- [6] CCITT Recommendation *Transmission characteristics at 2-wire analogue interfaces of digital exchanges*, Rec. Q.552.
- [7] CCITT Recommendation *Physical/electrical characteristics of hierarchical digital interfaces*, Rec. G.703.
- [8] CCITT Recommendation *12-channel terminal equipments*, Rec. G.232.
- [9] CCITT Recommendation *Transmission performance characteristics for PCM channels*, Rec. G.712.
- [10] CCITT Recommendation *Functional characteristics of interface associated with network nodes*, Rec. G.704.
- [11] CCITT Recommendation *Transmission characteristics at 4-wire analogue interfaces of a digital exchange*, Rec. Q.553.
- [12] CCITT Recommendation *Equipment for the measurement of digital and analogue/digital parameters*, Rec. O.131.
- [13] CCITT Recommendation *Quantizing distortion measuring equipment using a sinusoidal test signal*, Rec. O.132.
- [14] CCITT Recommendation *Measuring arrangement to assess the degree of unbalance about Earth*, Rec. O.9.
- [15] CCITT Recommendation *Equipment for the measurement of analogue parameters*, Rec. O.41.
- [16] CCITT Recommendation *1020 Hz reference test frequency*, Rec. O.6.
- [17] CCITT Recommendation *Climatic conditions and relevant tests for measuring equipment*, Rec. O.3.
- [18] CCITT Recommendation *Definitions used in Recommendations on general characteristics of international telephone connections and international telephone circuits*, Rec. G.100 (subclause A.3).