



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

M.380

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

**MAINTENANCE :
INTERNATIONAL TRANSMISSION SYSTEMS
(ANALOGUE)**

NUMBERING IN COAXIAL SYSTEMS

ITU-T Recommendation M.380

(Extract from the *Blue Book*)

NOTES

1 ITU-T Recommendation M.380 was published in Fascicle IV.1 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1988, 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

NUMBERING IN COAXIAL SYSTEMS

1 Numbering of groups, supergroups, etc., and of channels in coaxial systems

1.1 Numbering of a supermastergroup or of a 15 supergroup assembly

The supermastergroups and 15 supergroup assemblies of a coaxial system are identified by numbers giving their respective position in the frequency spectrum transmitted on the line. The numbering is shown in Figures 1/M.380, 2/M.380 and 3/M.380.

1.2 Numbering of a mastergroup

The mastergroups of a coaxial system are identified by numbers giving their respective position in the frequency spectrum transmitted on the line. The numbering is shown in Figures 1/M.380, 2/M.380, 4/M.380, 8/M.380 and 10/M.380.

Alternatively, when a mastergroup is regarded as being part of a supermastergroup, the position of the mastergroup can be indicated by the number of that supermastergroup followed by the number of mastergroup within the basic supermastergroup (for example, in Figure 1/M.380, the 5652-6884 kHz mastergroup in a 12 MHz system with supermastergroup frequency allocation is designated by the two numbers 2 and 8).

1.3 Numbering of a supergroup

The supergroups of a coaxial system are identified by numbers giving their respective position in the frequency spectrum transmitted on the line. The numbering is shown in Figures 2/M.380, 5/M.380, 6/M.380, 7/M.380 and 9/M.380.

The position of a supergroup that is part of a mastergroup is designated by the number of that mastergroup followed by the number of the supergroup within the basic mastergroup (examples: in Figure 1/M.380, the 5652-5892 kHz supergroup in a 12-MHz system with supermastergroup frequency allocation is designated by the three numbers 2, 8 and 4; in Figure 8/M.380, the 4332-4572 kHz supergroup in a 6-MHz system with mastergroup frequency allocation is designated by the two numbers 4 and 4).

The position of a supergroup that is part of a 15 supergroup assembly is designated by the number of that 15 supergroup assembly followed by the number of the supergroup within the basic 15 supergroup assembly (for example, in Figure 3/M.380, the 10 356-10 596 kHz supergroup in a 12-MHz system with frequency allocation by 15 supergroup assemblies is designated by the two numbers 3 and 9).

1.4 Numbering of a group

The position of a group is designated by the number of the supergroup in which it is placed followed by the number of the group within that supergroup (examples: in Figure 1/M.380 the 5844-5892 kHz group in a 12-MHz system with supermastergroup frequency allocation is designated by the four numbers 2, 8, 4 and 1; in Figure 8/M.380, the 4924-4972 kHz group in a 6-MHz system with mastergroup frequency allocation is designated by the three numbers 4, 6 and 3).

1.5 Numbering of a channel

The position occupied by a channel is designated by the number of the group to which it belongs followed by the number of the channel within that group (examples: in Figure 1/M.380, the 5884-5888 kHz channel in a 12-MHz system with supermastergroup frequency allocation is designated by the five numbers 2, 8, 4, 1 and 2; in Figure 8/M.380, the 4936-4940 kHz channel in a 6-MHz system with mastergroup frequency allocation is designated by the four numbers 4, 6, 3 and 9).

Note – In this system of numbering, the order of the numbers corresponds to a decreasing bandwidth, that is to say, number of supermastergroup (if any) followed by the numbers of the mastergroup, supergroup, group and channel.

2 Standard frequency allocations on 2.6/9.5 mm coaxial pairs

The CCITT has recommended various methods for allocating supermastergroups, mastergroups, supergroups and 15 supergroup assemblies on 2.6/9.5-mm coaxial pairs. The method for each standard system is given below. The identification numbers are shown in each figure to facilitate application of the rules set forth above.

2.1 *12-MHz systems using valves or transistors*

The frequency allocation for 12-MHz systems is in conformity with scheme 1A, 1B or 2 shown in Figures 1/M.380, 2/M.380 and 3/M.380.

The CCITT has also recommended the frequency-allocation scheme in Figure 4/M.380 for the simultaneous transmission of telephony and television.

2.2 *4-MHz systems*

Scheme A of Figure 5/M.380 shows the frequency-allocation scheme used in this case. The 2604-kHz pilot is used only in the 2.6-MHz system described below in § 2.3.

The 4287-kHz pilot is recommended only for 4-MHz systems on 1.2/4.4-mm coaxial pairs.

2.3 *2.6-MHz systems*

The frequency-allocation scheme for a 2.6-MHz system uses the scheme in Figure 5/M.380 retaining only supergroups 1 to 10 inclusive.

The pilots are: 60 or 308 kHz and 2604 kHz.

3 **Standard frequency allocations on 1.2/4.4-mm coaxial pairs**

The CCITT has recommended various methods for allocating supermastergroups, mastergroups, supergroups and 15 supergroup assemblies on 1.2/4.4-mm coaxial pairs. The method for each standard system is given below. The identification numbers are shown in each figure to facilitate application of the rules set forth in § 1 above.

3.1 *12-MHz systems*

The frequency-allocation schemes are the same as for 2.6/9.5-mm pairs (see Figures 1/M.380, 2/M.380 and 3/M.380).

3.2 *6-MHz systems*

The frequency allocation for 6-MHz systems is in conformity with scheme 1, 2 or 3 shown in Figures 6/M.380, 7/M.380 and 8/M.380.

3.3 *4-MHz systems*

The line-frequency allocation scheme A shown in Figure 5/M.380 is the same as for 2.6/9.5-mm pairs. However, the 4287 kHz pilot must be transmitted continuously if one of the Administrations concerned so requests.

Scheme B of Figure 5/M.380 shows the line-frequency allocation scheme used for mastergroups.

3.4 *1.3-MHz systems*

The line-frequency allocation scheme is in conformity with one of the schemes shown in Figures 9/M.380 and 10/M.380.

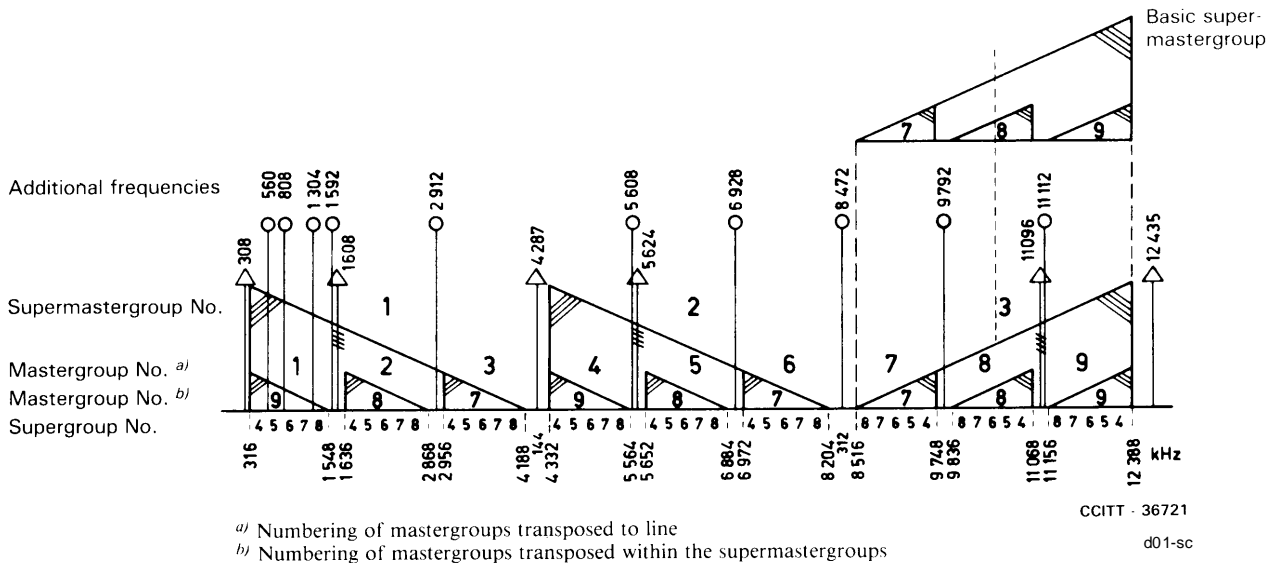


FIGURE 1/M.380

Frequency allocation (Scheme 1A) for 12-MHz systems



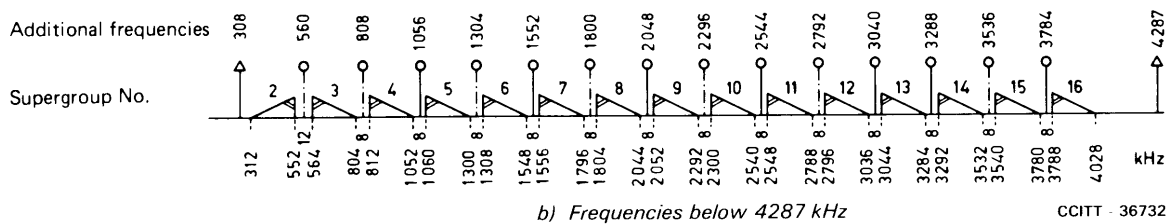


FIGURE 2/M.380

Frequency allocation (Scheme 1B) for 12-MHz systems

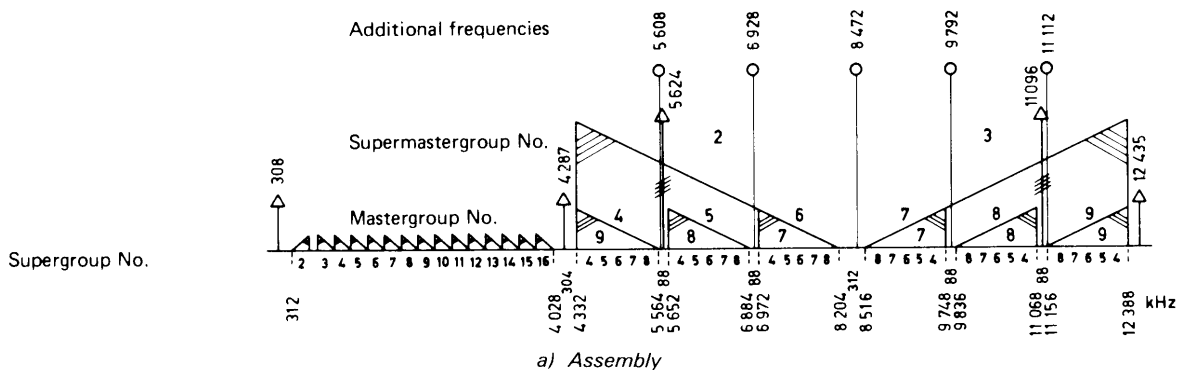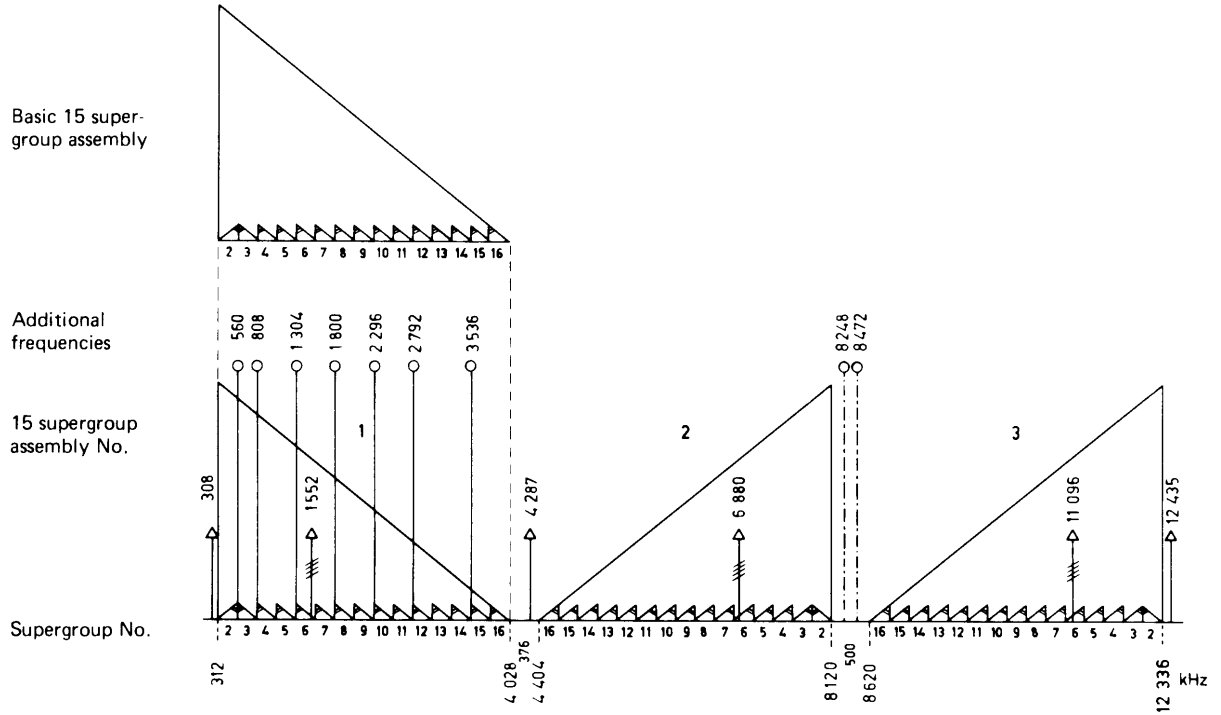


CCITT - 36742

d03-sc

FIGURE 3/M.380

Frequency allocation (Scheme 2) for 12-MHz systems

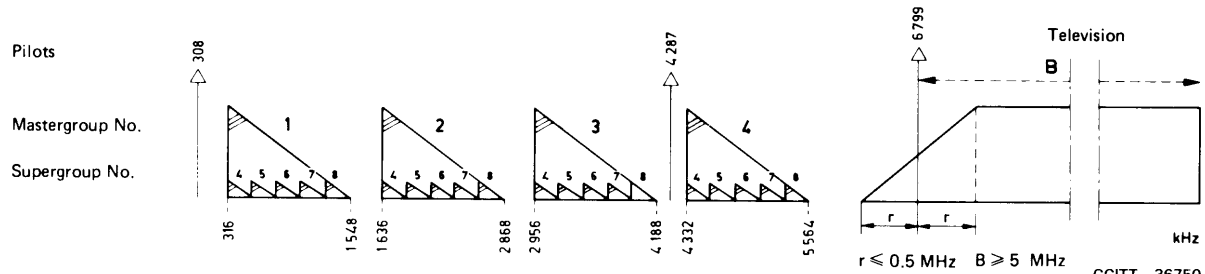


CCITT - 36750


d04-sc

FIGURE 4/M.380

Line-frequency allocation for 12-MHz systems
(simultaneous transmission of telephony and television)

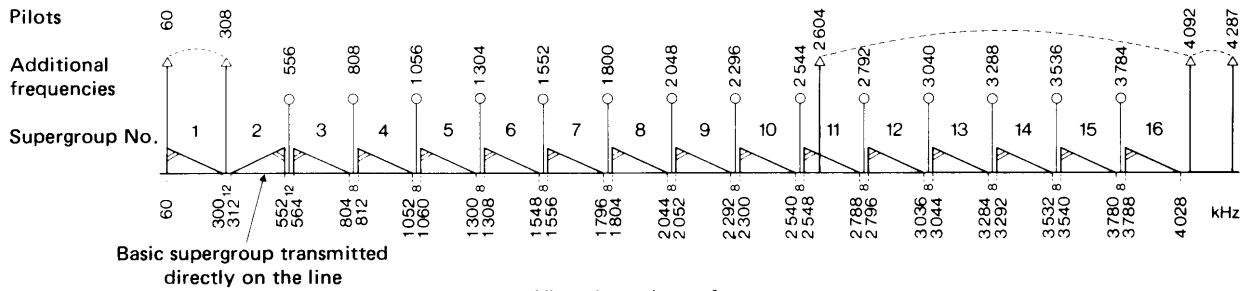

A — Allocation scheme for supergroups

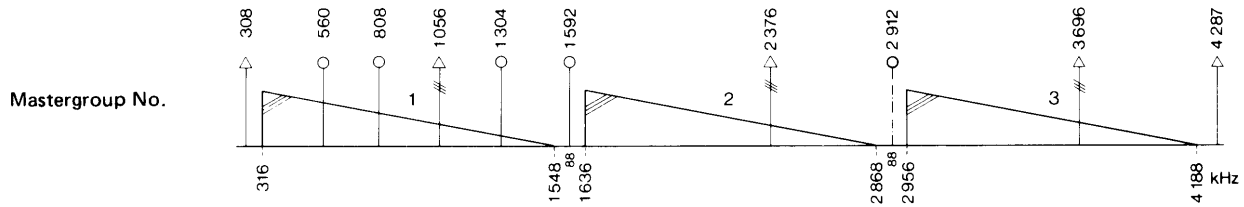


B — Allocation scheme for mastergroups

CCITT - 40010

d05-sc

FIGURE 5/M.380

Line-frequency allocation for 4-MHz systems

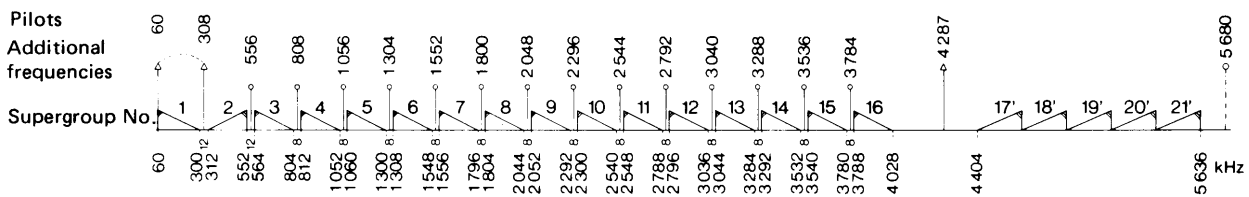


CCITT - 40020

d06-sc

FIGURE 6/M.380

Line-frequency allocation for 6-MHz systems (Scheme 1)

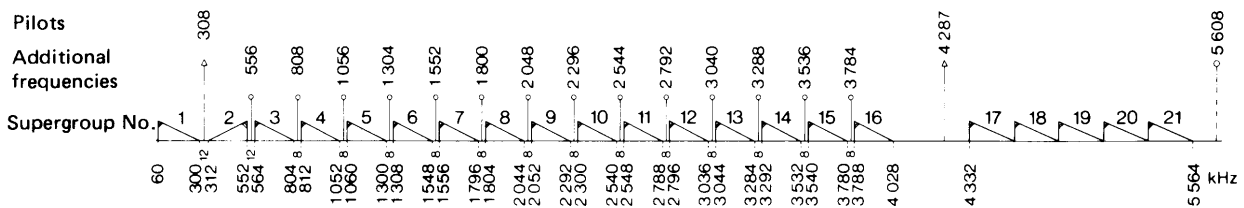


CCITT - 40030

d07-sc

FIGURE 7/M.380

Line-frequency allocation for 6-MHz systems (Scheme 2)

Pilots
 Additional frequencies
 Mastergroup No.
 Supergroup No.

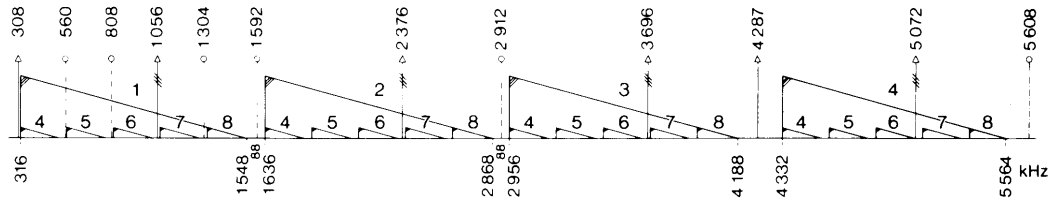

CCITT - 40040
 d08-sc


FIGURE 8/M.380

Line-frequency allocation for 6-MHz systems (Scheme 3)

Additional frequencies

Pilots

Supergroup No.

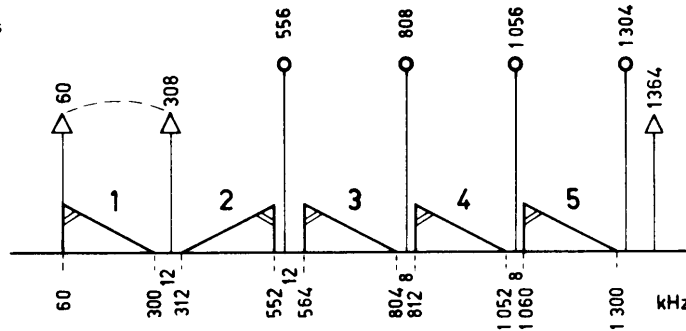

CCITT - 36760

d09-sc

FIGURE 9/M.380


Line-frequency allocation for 1.3-MHz systems (Scheme 1)

Additional frequencies

Pilots

Mastergroup

Supergroup No.

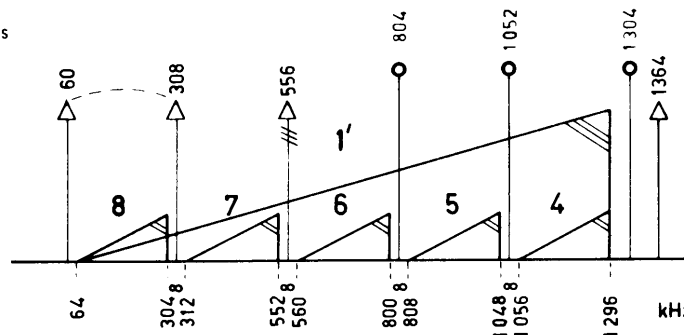

CCITT - 36770

d10-sc

FIGURE 10/M.380

Line-frequency allocation for 1.3-MHz systems (Scheme 2)