



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 197**

April 1994

---

Source: ETSI TC-TM

Reference: DE/TM-04001

ICS: 33.080

**Key words:** Transmission, radio, video

**Transmission and Multiplexing (TM);  
Parameters for radio relay systems for the transmission of  
digital signals and analogue video signals operating at 38 GHz**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1994. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Abbreviations.....	8
4 General characteristics .....	8
4.1 Frequency bands and channel arrangements .....	8
4.1.1 Frequency band is in the range 37 GHz to 39,5 GHz.....	8
4.1.2 Co-polar channel spacing for like carriers.....	8
4.1.3 Transmit/receive centre gap.....	8
4.1.4 Transmit/receive duplex frequency separation .....	8
4.2 Performance prediction and objectives (for reference only) .....	8
4.3 Compatibility requirements between systems.....	9
4.4 Types of installation .....	9
4.4.1 Environmental conditions .....	9
4.4.1.1 Equipment within weather protected locations .....	9
4.4.1.2 Equipment for non-weather protected locations .....	10
4.4.2 Electromagnetic compatibility .....	10
4.5 Block diagram .....	10
4.6 General characteristics .....	11
4.7 Telecommunications Management Network (TMN) interface .....	11
4.8 Branching/feeder/antenna requirements .....	11
4.9 Mechanical requirements.....	12
4.10 Power supply.....	12
4.11 Safety considerations.....	12
5 Parameters for digital systems.....	12
5.1 Transmission capacity .....	12
5.2 Applications.....	12
5.3 Baseband parameters .....	12
5.3.1 2 Mbit/s to 140 Mbit/s baseband interfaces.....	12
5.3.2 Synchronous Digital Hierarchy (SDH) baseband interface .....	12
5.4 Transmitter characteristics .....	13
5.4.1 Transmitter power range .....	13
5.4.2 Transmitter output power tolerance .....	13
5.4.3 RF spectrum mask.....	13
5.4.3.1 Spectrum reference level.....	16
5.4.4 Spurious emissions .....	16
5.4.5 RF frequency tolerance .....	17
5.5 Receiver characteristics.....	17
5.5.1 Input level range .....	17
5.5.2 Spurious emissions .....	17
5.6 System performance.....	17
5.6.1 BER performance.....	17
5.6.2 Equipment background BER.....	18
5.6.3 Interference sensitivity.....	19
5.6.4 Distortion sensitivity.....	19
6 Parameters for wide band analogue systems .....	19
6.1 Transmit/receive capacity .....	19
6.2 Applications.....	20
6.3 Baseband parameters .....	20
6.3.1 Video interfaces.....	20
6.3.2 Audio interface (if applicable) .....	20

6.3.3	Digital interface (if applicable).....	20
6.3.4	IF interface (if applicable) .....	20
6.3.5	Baseband performance .....	20
6.4	Transmitter characteristics .....	21
6.4.1	Tx power range .....	21
6.4.2	Tx output power tolerance .....	21
6.4.3	Radiated spectrum.....	21
	6.4.3.1 Spectrum masks .....	21
	6.4.3.2 Frequency deviation .....	22
6.4.4	Spurious emissions.....	23
6.4.5	RF frequency tolerance .....	23
6.5	Receiver characteristics .....	24
6.5.1	Input level range .....	24
6.5.2	Spurious emissions.....	24
6.5.3	Noise figure.....	24
6.6	Transmit/receive performance .....	24
6.6.1	Receiver threshold.....	24
6.6.2	Interference sensitivity .....	24
Annex A (informative):	Bibliography .....	26
History .....		27

## Foreword

This European Telecommunication Standard (ETS) has been prepared by the Transmission and Multiplexing (TM) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS specifies the minimum performance parameters for radio equipment operating in the frequency range 37 GHz to 39,5 GHz as specified in the scope. Other Standards cover radiocommunications equipment not listed in Clause 1.

Annex A (Bibliography) provides details of the informative references provided in this ETS.

Blank page

## 1 Scope

This European Telecommunication Standard (ETS) covers the minimum performance requirements for terrestrial fixed services radiocommunications equipment, as given below, in the frequency band 37 GHz to 39,5 GHz.

This ETS specifies the performance criteria for the different equipment groups.

The equipment groups are:

- digital signals;
- analogue video signals.

## 2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 019: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment".
- [2] prETS 300 132-1: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipments Part 1: Interfaces operated by alternating current "AC"". (DE/EE-02001.1)
- [3] prETS 300 132-2: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipments Part 2: Interfaces operated by direct current "DC"". (DE/EE-02001.2)
- [4] CCITT Recommendation G.703 (1991): "Physical/electrical characteristics of hierarchical digital interfaces".
- [5] CCITT Recommendation G.707 (1991): "Synchronous digital hierarchy bit rates".
- [6] CCITT Recommendation G.708 (1991): "Network node interface for the synchronous digital hierarchy".
- [7] CCITT Recommendation G.709 (1991): "Synchronous multiplexing structure".
- [8] CCITT Recommendation G.781 (1990): "Structure of recommendations on multiplexing equipment for synchronous digital hierarchy (SDH)".
- [9] CCITT Recommendation G.782 (1990): "Types and general characteristics of synchronous digital hierarchy (SDH) multiplexing equipment".
- [10] CCITT Recommendation G.783 (1990): "Characteristics of synchronous digital hierarchy (SDH) multiplexing equipment functional blocks".
- [11] CCITT Recommendation G.784 (1990): "Synchronous digital hierarchy (SDH) management".
- [12] CCIR Recommendation 403: "Intermediate-frequency characteristics for the interconnection of analogue radio-relay systems".
- [13] CCIR Recommendation 749: "Radio frequency channel arrangements for digital and analogue radio-relay systems operating in the 36.0 GHz to 40.5 GHz band".

[14] CCIR Recommendation 696: "Error performance and availability objectives for hypothetical reference digital sections utilising digital radio-relay systems forming part or all of the medium grade portion of an ISDN connection".

[15] CCIR Recommendation 697: "Error performance objectives for the local grade portion at each end of an ISDN utilising digital radio-relay systems".

### 3 Abbreviations

For the purposes of this ETS, the following abbreviations apply.

BER	Bit Error Ratio
RF	Radio Frequency
SDH	Synchronous Digital Hierarchy
SRL	Spectrum Reference Level
TMN	Telecommunications Management Network

### 4 General characteristics

#### 4.1 Frequency bands and channel arrangements

##### 4.1.1 Frequency band is in the range 37 GHz to 39,5 GHz

**Channel plan:** The channel plan shall be in accordance with CCIR Recommendation 749 [13] with a basic raster of 3,5 MHz.

##### 4.1.2 Co-polar channel spacing for like carriers

For systems operating on the same antenna, see subclause 4.3 a).

**Table 1: Digital systems**

Minimum Bit Rate (Mbit/s)	2	8	34	34	140/155
Channel Spacing (MHz)	7	14	28	56	140

**Table 2: Analogue systems**

Video Baseband (MHz)	< 3,5	< 6	< 10	< 14
Channel Spacing (MHz)	28	56	56	56

##### 4.1.3 Transmit/receive centre gap

The centre gap shall be taken as a multiple of the basic raster distance of 7 MHz and shall not be less than 56 MHz.

##### 4.1.4 Transmit/receive duplex frequency separation

The transmitter receiver duplex frequency separation shall not be less than 252 MHz (typical separations will be around 1 GHz). Spacing should be in accordance with local administrations' frequency planning rules.

#### 4.2 Performance prediction and objectives (for reference only)

Systems considered in this ETS should meet the CCIR medium grade performance objectives of CCIR Recommendation 696 [14] class 4 and the local grade performance objectives of CCIR Recommendation 697 [15].



The dominant fading mechanism is rain attenuation; performance prediction methods should be based on the latest issues of the following CCIR Recommendations:

Recommendation 453: "The formula for the radio refractive index";

Recommendation 530: "Propagation data and prediction methods required for the design of terrestrial line-of-sight systems";

Recommendation 837: "Characteristics of precipitation for propagation modelling";

Recommendation 838: "Specific attenuation model for rain for use in prediction methods";

Recommendation 840: "Attenuation due to clouds and fog".

### 4.3 Compatibility requirements between systems

- a) Systems should be required to operate on common hops using either separate antennas or the same antenna.
- b) There should be no requirement to operate transmitting equipment from one manufacturer with receiving equipment from another, or to multiplex different manufacturers equipment on the same antenna.

### 4.4 Types of installation

The equipment may comprise both radio-relay units in weather protected locations and outdoor units with the Radio Frequency (RF) assemblies located close to the antenna in order to minimise feeder losses.

#### 4.4.1 Environmental conditions

The equipment shall be required to meet either the environmental conditions set out in ETS 300 019 [1], which defines weather protected and non-weatherprotected locations, classes and test severities, or one of the conditions listed in subclause 4.4.1.2.

##### 4.4.1.1 Equipment within weather protected locations

The most important climatic parameter values for the five classes are given in table 3.

**Table 3**

Climatic class	3.1	3.2	3.3	3.4	3.5
High air temperature (°C)	+ 40	+ 45	+ 55	+ 70	+ 40
Low air temperature (°C)	+ 5	- 5	- 25	- 40	- 40
High relative humidity (%)	85	95	100	100	100
Low relative humidity (%)	5	5	10	10	10
Air movement (m/s)	5	5	5	5	5
Solar radiation (W/m <sup>2</sup> )	700	700	1 120	1 120	-

Climatic classes 3.1 and 3.2 apply to equipment designed for temperature controlled locations or partially temperature controlled locations respectively. This type of equipment is generally described as "indoor" equipment.

The use of radio-relay equipment covering climatic classes 3.3 (non-temperature controlled locations), 3.4 (sites with heat trap) and 3.5 (sheltered locations) is not mandatory.

**4.4.1.2 Equipment for non-weather protected locations**

This type of equipment is generally described as "outdoor" equipment. Class 4.1 or extended class 4.1 E parameters should be applied. Class 4.1 applies to many of the ETSI countries and class 4.1 E applies to them all. The most important climatic parameter values are given in table 4.

**Table 4**

Climatic class	4.1	4.1E
High air temperature (°C)	+40	+45
Low air temperature (°C)	-33	-45
High relative humidity (%)	100	100
Low relative humidity (%)	15	8
Air movement (m/s)	50	50
Solar radiation (W/m <sup>2</sup> )	1 120	1 120

It should be noted that radio cabinets supplied with a system will give their own "weather protection" including full protection against precipitation and wind. Climatic classes 3.3, 3.4 and 3.5 (subclause 4.4.1.1) may, therefore, also be applicable for "outdoor" locations.

Some ETSI members may also decide to apply one of the non-standard specifications given in table 5.

**Table 5**


High air temperature (°C)	+40	+50
Low air temperature (°C)	-20	-30
High relative humidity (%)	90	90
Low relative humidity (%)	5	5
Air movement (m/s)	50	50
Solar radiation (W/m <sup>2</sup> )	1 120	1 120

**4.4.2 Electromagnetic compatibility**

Under study.

**4.5 Block diagram**

The system diagram is shown in figure 1.

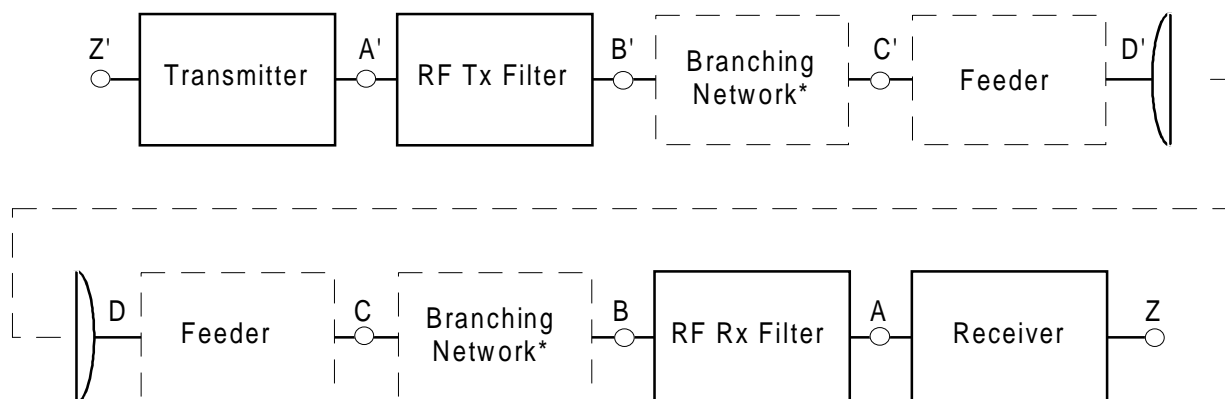

NOTE 1: For the purpose of defining the measurement points, the branching network does not include a hybrid.

NOTE 2: Points B and C, B' and C' may coincide.

**Figure 1: System diagram**

#### 4.6 General characteristics

The following characteristics are desirable:

- tuning facilities;
- flexibility for repeated installation;
- wayside traffic facilities;
- transmitter identification;
- maintenance facilities;
- performance monitoring facilities.

#### 4.7 Telecommunications Management Network (TMN) interface

A TMN interface required by a user should be in accordance with CCITT Recommendations G.784 [11] and G.773.

#### 4.8 Branching/feeder/antenna requirements

- a) The minimum recommended antenna radiation pattern envelope is shown in figure 2, element 2A. It may be necessary to use higher performance antenna patterns as shown in figure 2, elements 2B and 2C.
- b) Antenna flange/equipment feeder flange. When flanges are required IEC type UBR/PBR 320 should be used.

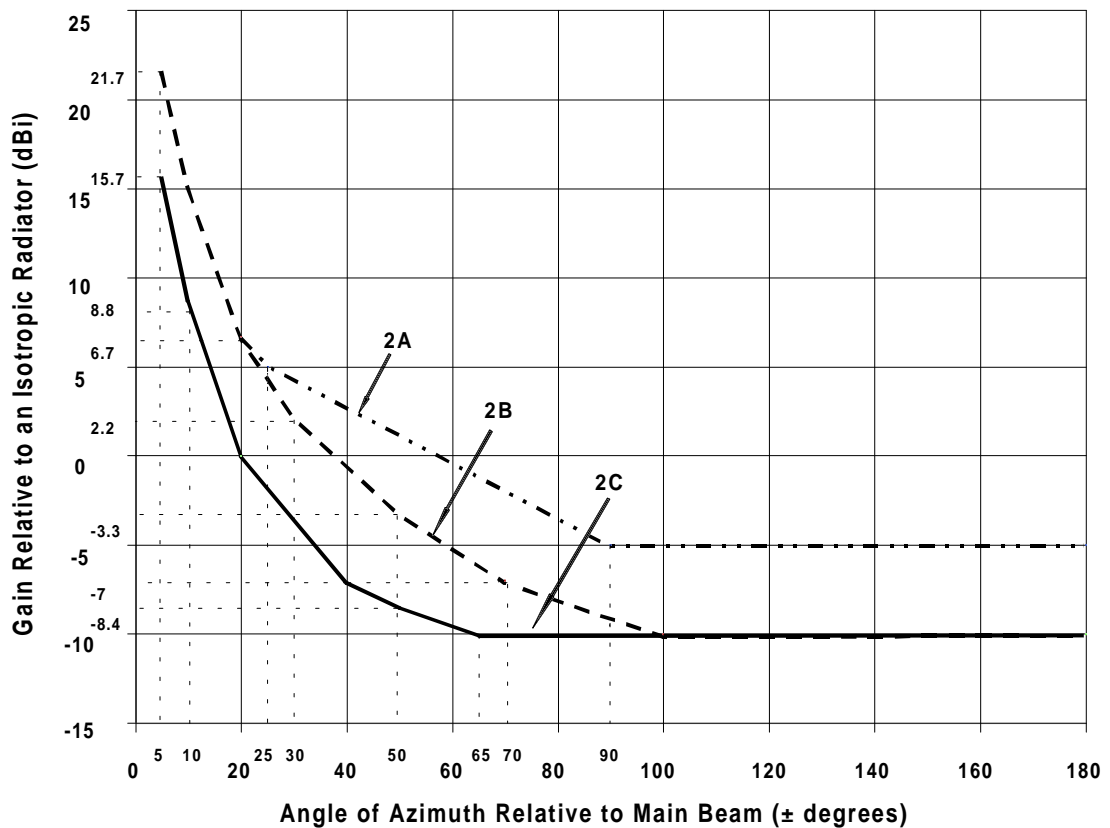


Figure 2: Limits of antenna gain for angles greater than 5° from the main beam axis

#### 4.9 Mechanical requirements

The following parameters should be taken into account in the design of equipment incorporating an external unit:

- a) maximum weight of external unit;
- b) size of external unit for wind loading considerations;
- c) maximum weight of replaceable units;
- d) ease of access to replaceable units.

#### 4.10 Power supply

The equipment shall operate from any of the primary supplies within the ranges specified in ETS 300 132-1 [2] and ETS 300 132-2 [3].

ETS 300 132-1 [2] and ETS 300 132-2 [3] specify the tolerances as shown below:

for 48 V DC nominal: 40,5 57 V DC;

for 60 V DC nominal: 50 72 V DC;

for 230 V AC nominal: 207 253 V AC/50 Hz  $\pm$  2 Hz.

For DC systems, the positive pole of the battery should be earthed.

NOTE: Some countries may require to use a primary supply of 24 V.

#### 4.11 Safety considerations

Maximum radiated power density under normal operating conditions should be in accordance with current world health organisation figures.

### 5 Parameters for digital systems

#### 5.1 Transmission capacity

Bit rates: 2 Mbit/s, 8 Mbit/s, 34 Mbit/s, 140 Mbit/s, 155 Mbit/s (STM-1). System rates configured as n-times 2 Mbit/s are also considered.

#### 5.2 Applications

2 Mbit/s - 155 Mbit/s point-to-point local and regional networks, mobile base station connections, subscriber access links, (including transportable and off-shore use).

#### 5.3 Baseband parameters

##### 5.3.1 2 Mbit/s to 140 Mbit/s baseband interfaces

Baseband interfaces shall be in accordance with one of the applicable CCITT interfaces. Additional service channels or wayside traffic are not considered in this ETS.

##### 5.3.2 Synchronous Digital Hierarchy (SDH) baseband interface

In accordance with CCITT Recommendations G.703 [4], G.707 [5], G.708 [6], G.709 [7], G.781 [8], G.782 [9], G.783 [10] and G.784 [11] with possible simplifications.

NOTE: Under study in ETSI STCs TM3 and TM4.

## 5.4 Transmitter characteristics

### 5.4.1 Transmitter power range

The maximum output power shall be 1 Watt referred to point C' of the system diagram as shown in figure 1.

### 5.4.2 Transmitter output power tolerance

The output power tolerance shall be within:

± 3 dB: classes 3.3 to 3.5 (as defined in subclause 4.4.1.1) and all classes as defined in subclause 4.4.1.2;

± 2 dB: classes 3.1 and 3.2 (as defined in subclause 4.4.1.1).

### 5.4.3 RF spectrum mask

The equipment shall comply with the digital RF power spectrum mask given in figures 3 to 7 of this ETS. The 0 dB reference level shown on the spectrum masks relates to the peak of the modulated spectrum, excluding residual carrier. This reference level shall be within ± 3 dB of the measured level of the unmodulated carrier minus the Spectrum Reference Level (SRL) calculated in accordance with subclause 5.4.3.1. All spectrum masks include an allowance of ± 50 ppm for frequency stability.

NOTE 1: Some administrations may not allow spectrum peaks, due to the modulation process, more than 3 dB above the dotted reference lines given in figures 3 to 7.

NOTE 2: Spectrum analyser settings for RF power spectrum measurements are given in table 6.

**Table 6**

Bit rate (Mbit/s)	2	8	34	34	140
Channel spacing (MHz)	7	14	28	56	140
IF Bandwidth (kHz)	30	30	100	100	300
Total sweep width (MHz)	20	50	100	200	500
Video bandwidth (kHz)	0,1	0,1	0,1	1	1
Recommended scan time (s)	20	50	20	20	20

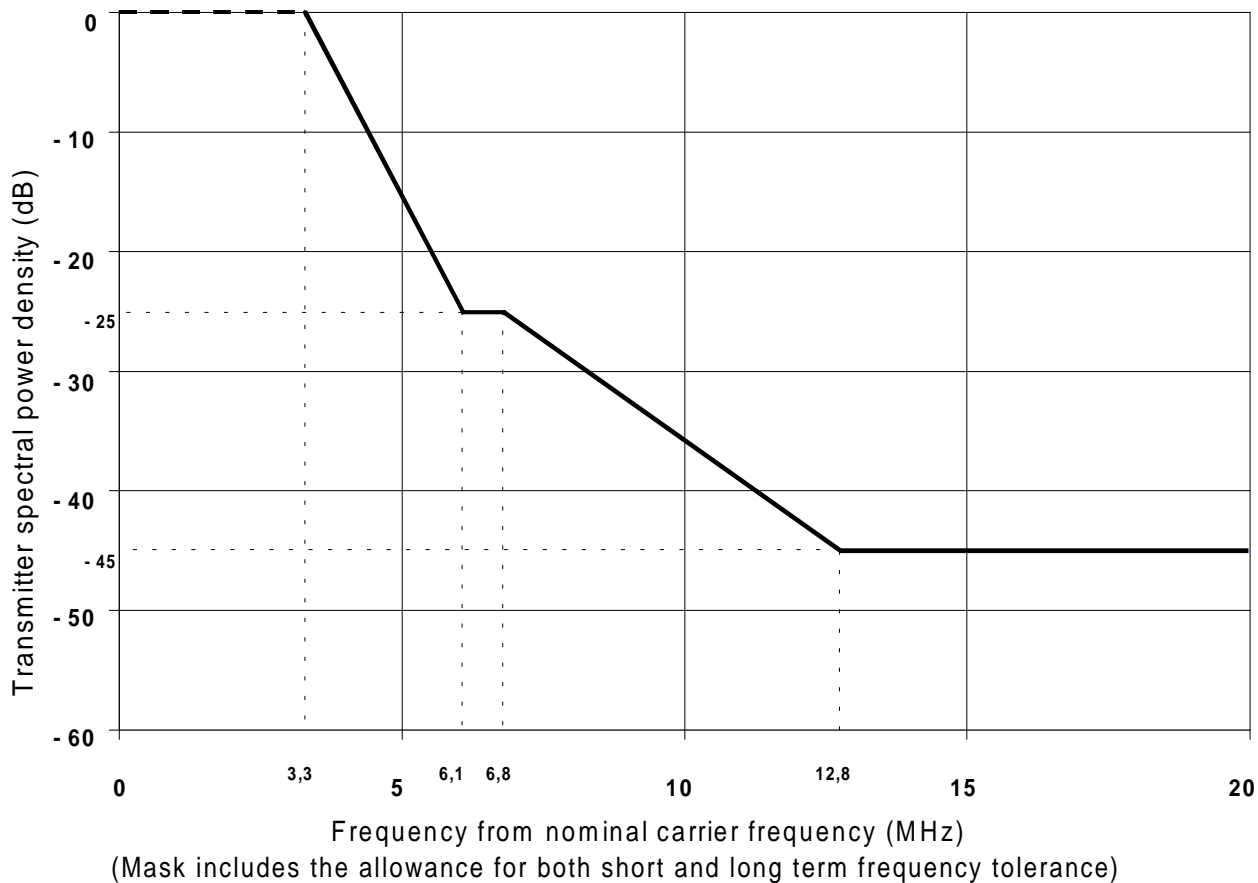


Figure 3: Limits of spectral power density for minimum system rate of 2 Mbit/s using channel spacing of 7 MHz (referred to nominal centre frequency ( $f_0$ ))



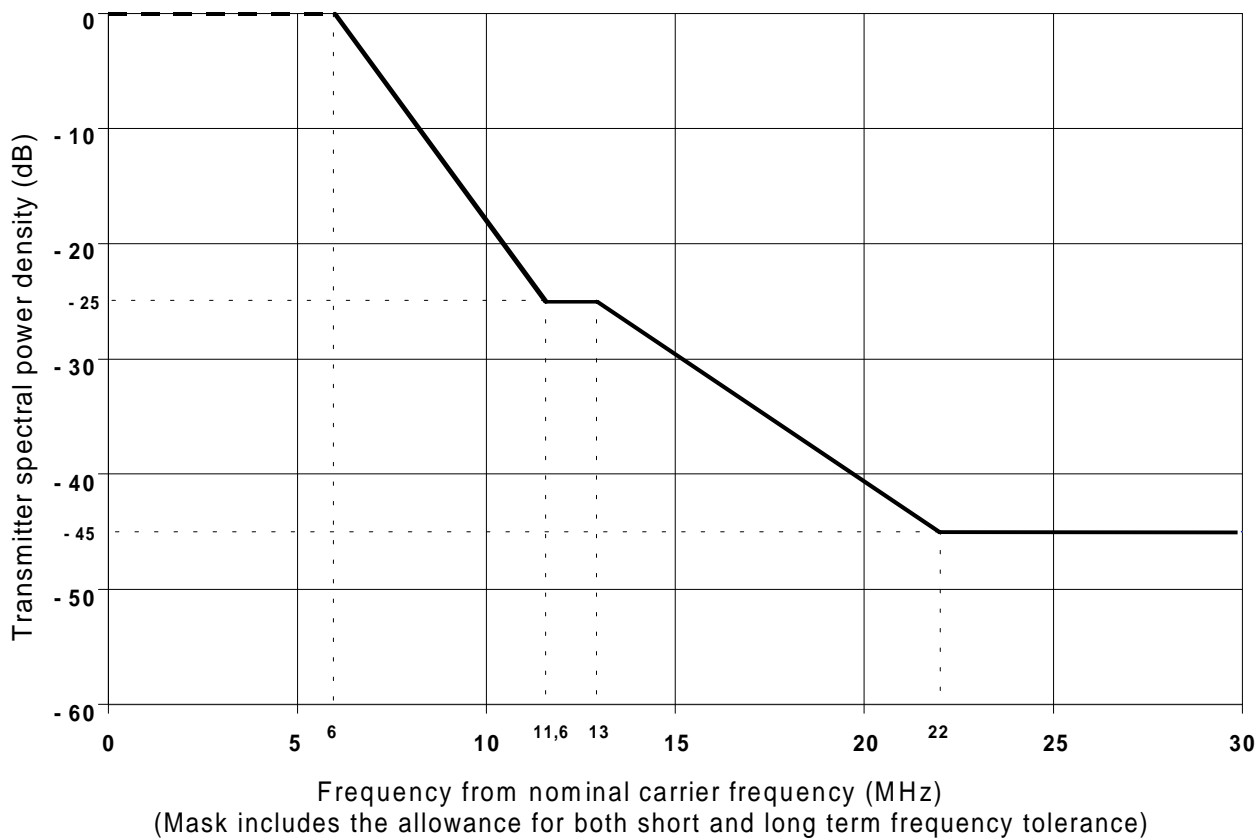



Figure 4: Limits of spectral power density for minimum system rate of 8 Mbit/s using channel spacing of 14 MHz (referred to nominal centre frequency ( $f_0$ ))

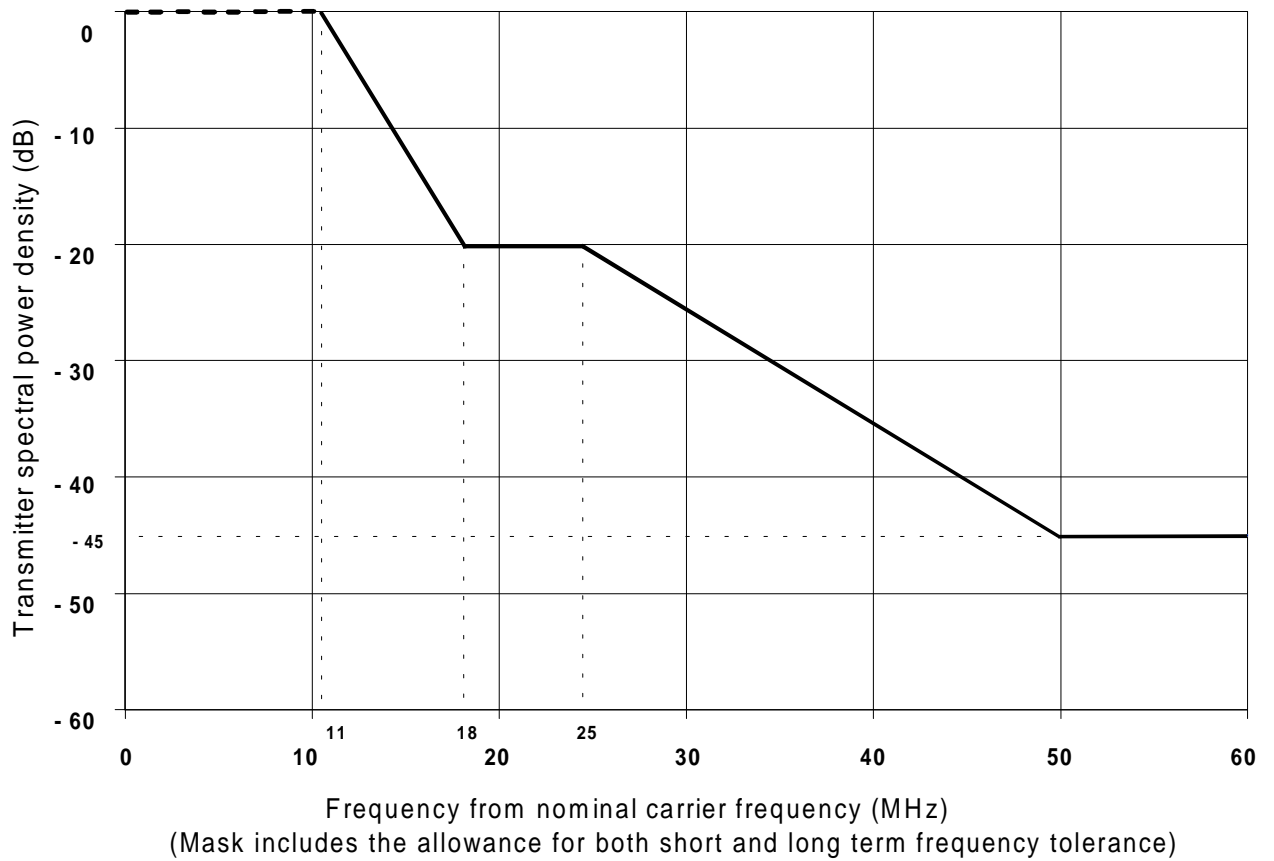

**Figure 5: Limits of spectral power density for minimum system rate of 34 Mbit/s using channel spacing of 28 MHz (referred to nominal centre frequency ( $f_0$ ))**

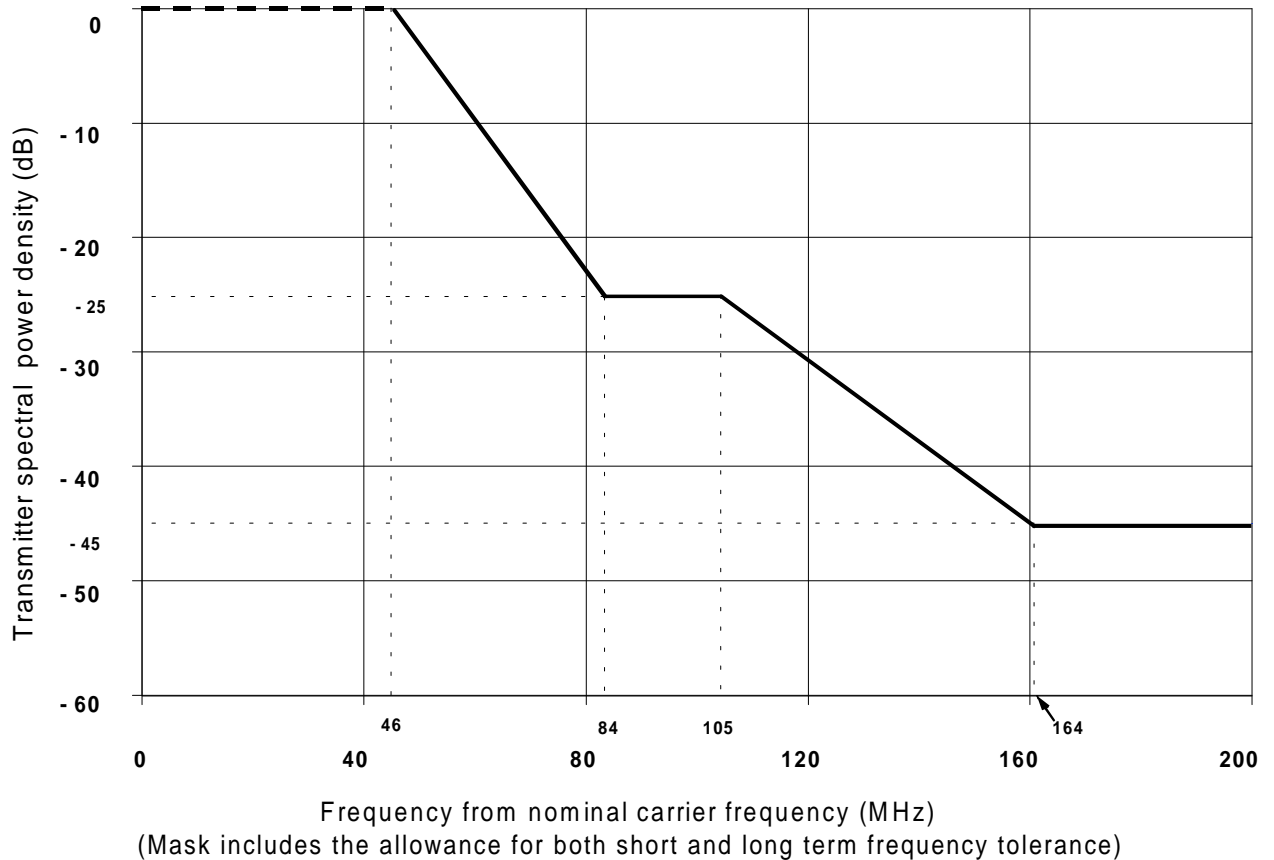

**Figure 6: Limits of spectral power density for minimum system rate of 140/155 Mbit/s using channel spacing of 140 MHz (referred to nominal centre frequency ( $f_0$ ))**

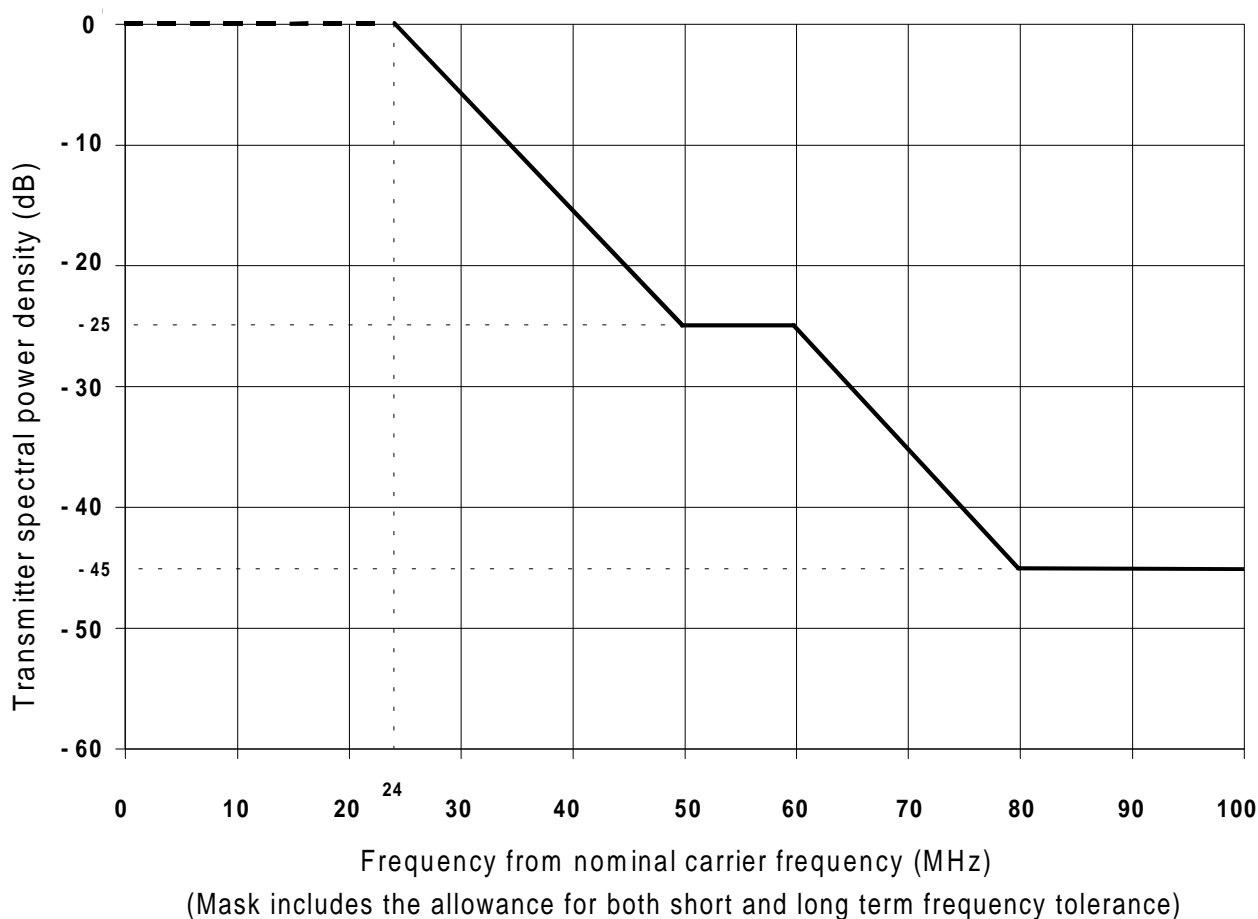

**Figure 7: Limits of spectral power density for minimum system rate of 34 Mbit/s using channel spacing of 56 MHz (referred to nominal centre frequency (fo))**

#### 5.4.3.1 Spectrum reference level

The spectrum reference level shall be calculated using the following formula:

$$SRL = 10 \log_{10} \left( \frac{\text{Analyser IF Bandwidth (Hz)}}{\text{Symbol Rate (baud)}} \right)$$

#### 5.4.4 Spurious emissions

The transmitter shall be unmodulated, and the level of each spurious emission in the frequency range 30 MHz to 80 GHz, shall not exceed:

- 30 MHz to 21,2 GHz      - 90 dBW;
- 21,2 GHz to 80 GHz      - 60 dBW.

NOTE 1: All levels should be measured at point C'.

NOTE 2: Spurious emissions are emissions at frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude emissions which result from the modulation process. The necessary bandwidth is defined as twice the transmitted symbol rate.

NOTE 3: Definitions and methods of measurement for integrated equipment where the antenna port is inaccessible are under study.



NOTE 4: The lower frequency limit for spurious emission conformance testing and receiver spurious response rejection shall be half the waveguide cut-off frequency subject to the input/output waveguide being not less than two cut-off wavelengths long.

#### **5.4.5 RF frequency tolerance**

RF frequency tolerances are included in the spectrum masks (see figures 3 to 7). Maximum allowable RF frequency tolerance shall not exceed  $\pm 50$  ppm.

### **5.5 Receiver characteristics**

#### **5.5.1 Input level range**

The input level range for a Bit Error Ratio,  $BER < 10^{-3}$  shall extend from the upper limit of - 50 dBW to the lower threshold for  $BER = 10^{-3}$ , referred to point C.

#### **5.5.2 Spurious emissions**

The frequency range in which the spurious emissions specifications apply shall be 30 MHz to 80 GHz. The limit values measured at point C are:

30 MHz to 21,2 GHz - 90 dBW;

21,2 GHz to 80 GHz - 60 dBW.

NOTE 1: Spurious emissions are emissions at frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude emissions which result from the modulation process. The necessary bandwidth is defined as twice the transmitted symbol rate.


NOTE 2: Definitions and methods of measurement for integrated equipment where the antenna port is not accessible are under study.

NOTE 3: The lower frequency limit for spurious emission conformance testing and receiver spurious response rejection shall be half the waveguide cut-off frequency subject to the input/output waveguide being not less than two cut-off wavelengths long.

### **5.6 System performance**

#### **5.6.1 BER performance**

BER versus receive signal power level should be referred to point C of the system diagram (figure 1). See figure 8.

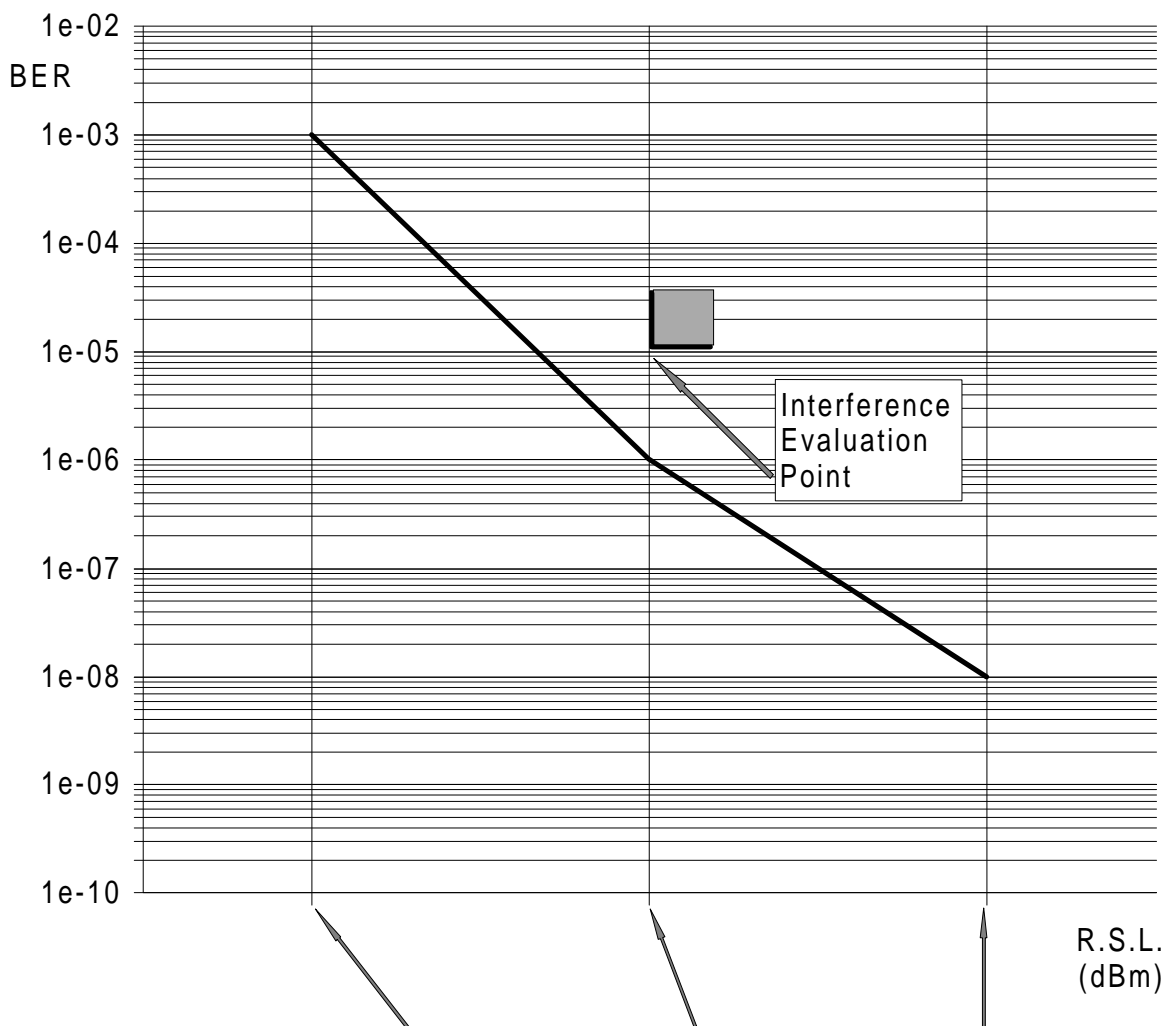

Bit Rate	BER 1e-3	BER 1e-6	BER 1e-8
2 Mbit/s	- 81	- 78	- 74
8 Mbit/s	- 75	- 72	- 68
34 Mbit/s	- 72	- 69	- 65
140/155 Mbit/s	- 66	- 63	- 59

Figure 8: BER versus RSL

5.6.2 Equipment background BER

The equipment background BER level range under simulated operating conditions without interference is measured with a signal level at point C which is between 15 dB and 40 dB above the level which gives  $BER = 10^{-3}$ . The measurement period should not be less than 15 hours (all measurements are made at the system bit rate).

For systems less than 34 Mbit/s:  $BER < 10^{-10}$ ;

### 5.6.3 Interference sensitivity

All receive signal levels and C/I measurements should be referred to point C of the system diagram (see figure 1):

- a) co-channel interference.

For a receiver operating at the  $10^{-6}$  BER threshold given in figure 8 for system rates of 2 Mbit/s to 155 Mbit/s, introduction of a like-modulated co-channel interferer at C/I of 23 dB shall not result in a BER greater than  $10^{-5}$ ;

- b) adjacent channel interference.

For a receiver operating at the  $10^{-6}$  BER threshold given in figure 8, introduction of a like-modulated adjacent channel interferer at the level and frequency separation given in table 7 shall not result in a BER greater than  $10^{-5}$ ;

**Table 7: Adjacent channel interference levels**

Bit Rate (Mbit/s)	Separation of wanted and interfering signal (MHz)		Interference level (Carrier/Interference (dB))	
	Co-polar	Cross Polar	Co-polar	Cross polar
2	7	N/A	0	N/A
8	14	N/A	0	N/A
34	28	N/A	0	N/A
34	56	N/A	0	N/A
140/155	140	N/A	0	N/A

NOTE: Regulatory administrations may wish to vary the value of C/I for co-polar, adjacent channel interference. Values of C/I are typically in the range 0 to - 3 dB.

- c) CW spurious interference.

For a receiver operating at the  $10^{-6}$  BER threshold given in figure 8, introduction of a CW interferer with a level of + 27 dB or + 30 dB, at the discretion of the administration, with respect to the "wanted" signal and at any frequency in the range 30 MHz to 80 GHz, excluding frequencies either side of the wanted frequency by up to twice the relevant co-polar channel spacing, shall not result in a BER greater than  $10^{-5}$ .

This test is designed to identify specific frequencies at which the receiver may have a spurious response; e.g. image frequency, harmonics of the receive filter, etc. The test is not intended to imply a relaxed specification at all out-of-band frequencies.

### 5.6.4 Distortion sensitivity

Distortion sensitivity is not likely to be significant for short hop operation. Signatures for systems are not required.

## 6 Parameters for wide band analogue systems

### 6.1 Transmit/receive capacity

The following video baseband bandwidths may be used:

- a) up to 3,5 MHz;
- b) up to 6 MHz;
- c) up to 10 MHz;
- d) up to 14 MHz.

These may have sub-carriers associated with them.

It is recognised that sub-carriers shall be used to carry four distinct traffic types:

- CW (e.g. continuity pilot);
- low frequency analogue (e.g. audio);
- wide band analogue (e.g. secondary video);
- data (e.g. 2 Mbit/s).

## 6.2 Applications

Point-to-point TV (broadcast quality).

Point-to-point TV (surveillance).

Point-to-point wide band video (radar remoting).

## 6.3 Baseband parameters

### 6.3.1 Video interfaces

Level: nominally 1 V peak-to-peak.

Impedance: 75  $\Omega$  unbalanced.

Minimum return loss: 26 dB.

### 6.3.2 Audio interface (if applicable)

Level: 0 to 6 dB $\mu$  (peak level + 9 dBm to + 15 dBm).

Impedance: input 600  $\Omega$  symmetric;  
output < 50  $\Omega$  symmetric.

Minimum return loss: 20 dB.

### 6.3.3 Digital interface (if applicable)

For CCITT bit rates the interface should conform to CCITT Recommendation G.703 [4].

### 6.3.4 IF interface (if applicable)

Characteristics should be in accordance with CCIR Recommendation 403 [12].

### 6.3.5 Baseband performance

In view of varied and numerous potential applications for analogue links it is not practicable to specify the overall performance characteristics for individual applications.

As an example, some sample performance parameters are given in table 8 applicable to an analogue hop carrying a PAL video signal together with an audio channel.

**Table 8: Example of some performance parameters for a video and an audio channel**

<b>Video</b>	
Signal to noise - continuous weighted	60 dB
Noise - periodic	- 60 dB
Baseband frequency response	$\pm 1$ dB
Baseband group delay	20 ns
Differential phase	$\pm 2^\circ$
Differential gain	$\pm 2\%$
Linear wave form distortion	2%
<b>Audio</b>	
Frequency response	$\pm 1$ dB
Total harmonic distortion	0,5%
Noise - weighted	60 dBQOps

NOTE: All measurements made at 40 dB above Rx threshold as defined in subclause 6.6.1.

The absolute performance characteristics for broadcast quality video and audio channels are available in the relevant CCIR (CMTT) or CCITT Recommendations.

#### 6.4 Transmitter characteristics

##### 6.4.1 Tx power range

Maximum output power up to 1 Watt referred to point C' of the system diagram (see figure 1).

##### 6.4.2 Tx output power tolerance

The output power tolerance shall be within:

$\pm 4$  dB: classes 3.3 to 3.5 (as defined in subclause 4.4.1.1)  
 and all classes as defined in subclause 4.4.1.2.

$\pm 3$  dB: classes 3.1 and 3.2 (as defined in subclause 4.4.1.1).

##### 6.4.3 Radiated spectrum

###### 6.4.3.1 Spectrum masks

The equipment shall comply with the appropriate RF power spectrum mask from those given in figures 9 and 10. The 0 dB reference level shown on the spectrum masks shall be set to the level of the unmodulated carrier. All spectrum masks include an allowance for frequency stability.

NOTE: Spectrum analyser settings for RF power spectrum measurements should be those given in table 9.

**Table 9**

Video baseband bandwidth (MHz)	< 3,5 MHz	< 14 MHz
IF bandwidth (kHz)	30	30
Total sweep width (MHz)	100	100
Video filter bandwidth (kHz)	0,3	0,3
Recommended scan time (s)	50	50

6.4.3.2 Frequency deviation

See table 8.

- a) Primary video.


The primary video may be defined as that traffic not carried on a sub-carrier. No limit applies to the frequency deviation of the primary traffic.

- b) Sub-carrier deviation of the main carrier.


The maximum sub-carrier deviation for each type of traffic is given in table 10 and these limits should apply both when the sub-carrier is modulated or unmodulated.

**Table 10: Transmitter characteristics:  
 Maximum frequency deviations of the main carrier by sub-carriers**

Video baseband	<3,5 MHz	<6 MHz	<10 MHz	<14 MHz
Channel spacing	28 MHz	56 MHz	56 MHz	56 MHz
<b>Maximum frequency deviation of the main carrier</b>				
Primary video	No limit	No limit	No limit	No limit
<b>Sub-carriers</b>				
- CW (pilot)	0,6 MHz	1 MHz	1 MHz	-
-Narrow band analogue (audio)	0,6 MHz	2 MHz	2 MHz	-
-Wide band analogue (video)	-	4 MHz	4 MHz	-
-Digital	-	2 MHz	2 MHz	-
Spectrum mask	figure 9	figure 10	figure 10	figure 10

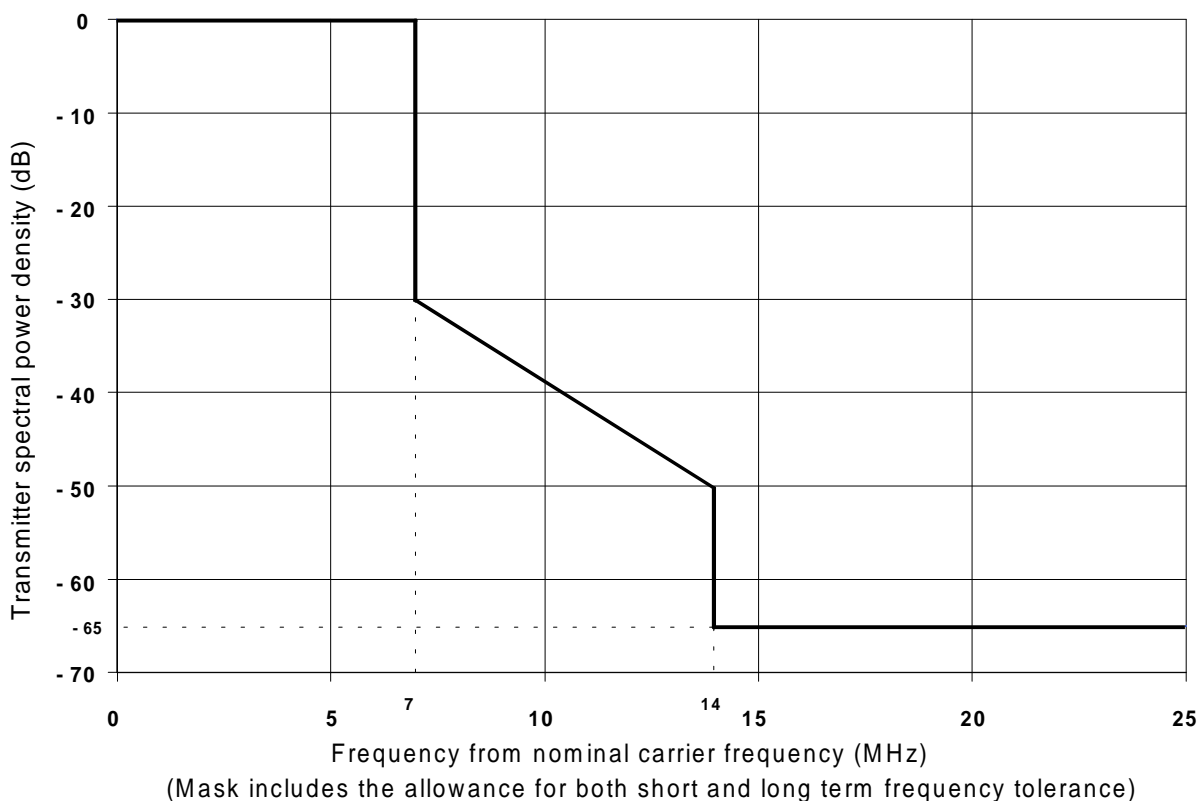

**Figure 9: Limits of spectral power density for video basebands up to 3,5 MHz using channel spacing of 28 MHz (referred to nominal centre frequency (fo))**

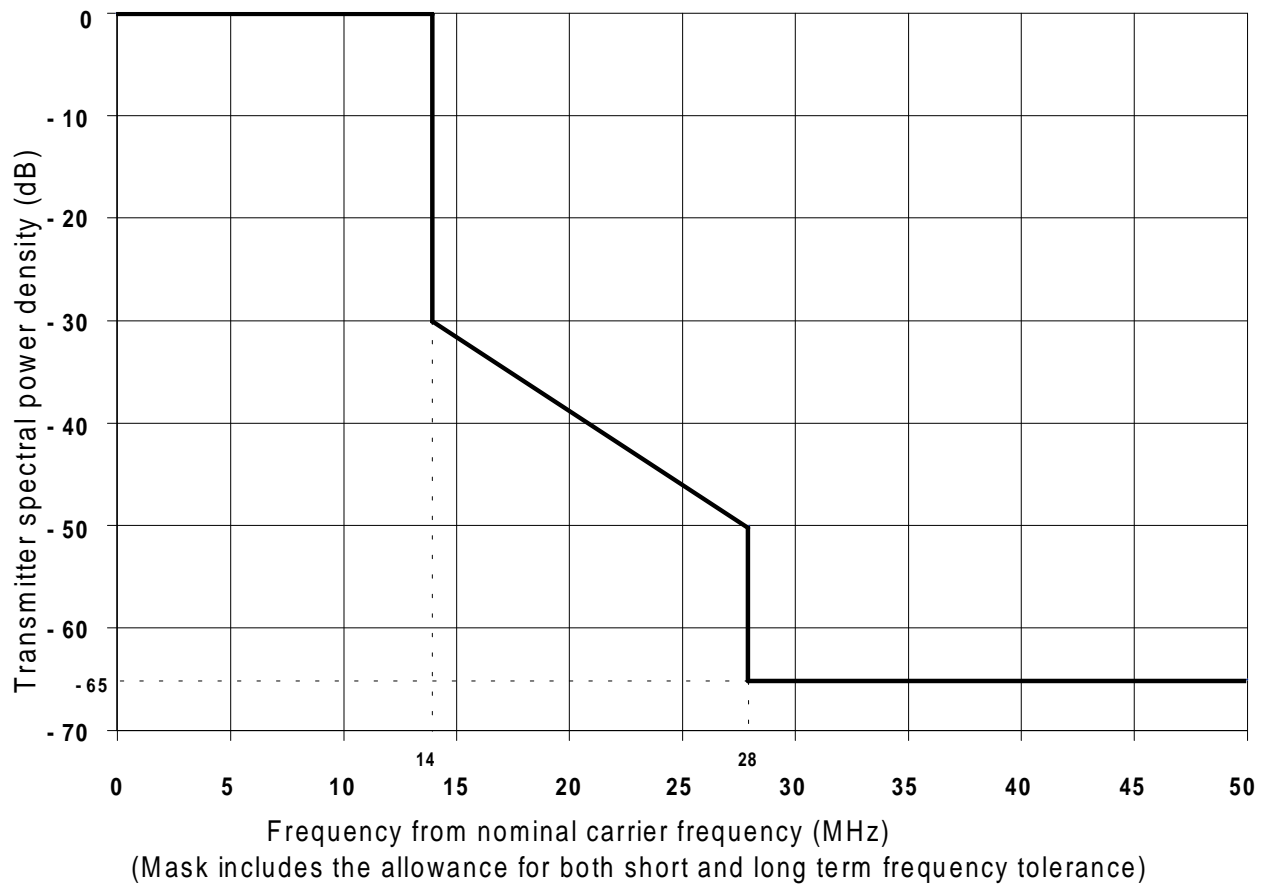

**Figure 10: Limits of spectral power density for video basebands up to 14 MHz using channel spacing of 56 MHz (referred to nominal centre frequency ( $f_0$ ))**

#### 6.4.4 Spurious emissions

The transmitter shall be unmodulated, and the level of each spurious emission in the frequency range 30 MHz to 80 GHz, shall not exceed:

30 MHz to 21,2 GHz - 90 dBW;

21,2 GHz to 80 GHz - 60 dBW.

NOTE 1: All levels should be measured at point C'.

NOTE 2: Spurious emissions are emissions at frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude emissions which result from the modulation process.

NOTE 3: Definitions and methods of measurement for integrated equipment where the antenna port is not accessible are under study.

NOTE 4: The lower frequency limit for spurious emissions conformance testing and receiver spurious response rejection shall be half the waveguide cut-off frequency subject to the input/output waveguide being not less than two cut-off wavelengths long.

#### 6.4.5 RF frequency tolerance

RF frequency tolerances are included in the spectrum masks (see figures 9 and 10). The maximum allowable RF frequency tolerance shall not exceed  $\pm 100$  ppm.

## 6.5 Receiver characteristics

All measurements refer to point C of the system diagram (see figure 1).

### 6.5.1 Input level range

From - 50 dBW to receiver threshold, as defined in subclause 6.6.1.

### 6.5.2 Spurious emissions

The frequency range in which the spurious emissions specifications apply shall be 30 MHz to 80 GHz. The limit values measured at point C are:

30 MHz to 21,2 GHz - 90 dBW;

21,2 GHz to 80 GHz - 60 dBW.

NOTE 1: Spurious emissions are emissions at frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude emissions which result from the modulation process.

NOTE 2: Definitions and methods of measurement for integrated equipment where the antenna port is not accessible are under study.

NOTE 3: The lower frequency limit for spurious emissions conformance testing and receiver spurious response rejection shall be half the waveguide cut-off frequency subject to the input/output waveguide being not less than two cut-off wavelengths long.

### 6.5.3 Noise figure

The receiver noise figure shall not exceed 12 dB.

## 6.6 Transmit/receive performance

### 6.6.1 Receiver threshold

The receiver threshold is defined as the receive signal level, referred to as point C of the system diagram, as shown in figure 1, at which a certain minimum performance is reached. In view of the wide variety of equipment types to be found in practice, it is not proposed to state limits for this parameter. However, in order to specify meaningful interference limits, it is necessary to use the measured receiver threshold as a baseline.

The signal/unweighted noise ratio shall be measured at each output port (video, audio, etc.) as a function of receive signal level. The receiver threshold shall be defined as the receive level at which the relationship between the receive signal level and the output signal/noise ratio deviates by 3 dB. It is recognised that for a composite video signal (incorporating modulated sub-carriers) the threshold will be different for each output signal; the receiver threshold in this case should be taken as the highest receive signal level at which any of the output signals reaches the receiver threshold.

### 6.6.2 Interference sensitivity

#### a) Co-channel interference.

For planning purposes it should be assumed that the level of co-channel interference into the wide band analogue channel should not exceed - 125 dBW. It should be recognised that the degradation in performance caused by this interference shall depend on a number of equipment characteristics (e.g. deviation, receiver noise performance, etc.) and it is, therefore, not proposed to set limits on this parameter. However, it is desirable to measure and record the co-channel interference level.



b) Adjacent channel interference.

For a receiver operating with a wanted signal whose level is 9 dB above the receiver threshold measured in subclause 6.6.1, the introduction at point C of a like modulated interferer at the level and frequency separation given in table 11 should not result in a degradation of the output signal/noise ratio of more than 1 dB.

**Table 11: Adjacent channel separation and interference levels**

Video baseband	Separation of wanted and interfering signal (MHz)		Interference level (Carrier/interference (dB))	
	Co-polar	Cross polar	Co-polar	Cross polar
< 3,5 MHz	28	N/A	0	N/A
< 6 MHz	56	N/A	0	N/A
< 10 MHz	56	N/A	0	N/A
< 14 MHz	56	N/A	0	N/A

c) CW spurious interference.

For a receiver operating with a wanted signal whose level is 9 dB above the receiver threshold measured in subclause 6.6.1, the introduction at point C of a CW interferer at a level of + 30 dB with respect to the wanted signal and at any frequency from 30 MHz to 80 GHz, excluding frequencies either side of the wanted signal by up to twice the relevant co-polar spacing, shall not result in a degradation of any output signal/noise ratio of more than 1 dB.

## Annex A (informative): Bibliography

The following documents are informative references to this ETS.

- ITU-T Recommendation G.773: "Protocol suites for Q-interfaces for management of transmission systems".
- CCIR Recommendation 453: "The formula for the radio refractive index".
- CCIR Recommendation 530: "Propagation data and prediction methods required for the design of terrestrial line-of-sight systems".
- CCIR Recommendation 837: "Characteristics of precipitation for propagation modelling".
- CCIR Recommendation 838: "Specific attenuation model for rain for use in prediction methods".
- CCIR Recommendation 840: "Attenuation due to clouds and fog".
- CCIR Report 1053: "Error performance and availability objectives for digital radio-relay systems used in the local-grade portion of an ISDN connection".
- ETR 035: "Equipment Engineering (EE); Environmental engineering Guidance and terminology".

## History

Document history	
April 1994	First Edition
January 1996	Converted into Adobe Acrobat Portable Document Format (PDF)