

INTERNATIONAL STANDARD

**Coaxial communication cables –
Part 1-123: Electrical test methods – Test for attenuation constant of radiating
cable**





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



IEC 61196-1-123

Edition 1.0 2023-03

INTERNATIONAL STANDARD

**Coaxial communication cables –
Part 1-123: Electrical test methods – Test for attenuation constant of radiating
cable**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.120.10

ISBN 978-2-8322-6463-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions and abbreviated terms.....	5
3.1 Terms and definitions.....	5
3.2 Abbreviated terms.....	5
4 Methodology.....	5
4.1 General.....	5
4.2 Free-space method.....	6
4.3 Ground-level method.....	6
5 Test procedures	7
5.1 General.....	7
5.2 Equipment	8
5.3 Calibration	8
5.4 Measurement.....	8
6 Expression of test results	9
6.1 Expression.....	9
6.2 Temperature correction.....	9
7 Test report.....	9
8 Requirements	9
Bibliography.....	10
Figure 1 – Attenuation constant with free-space method.....	6
Figure 2 – Attenuation constant with ground-level method	7

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COAXIAL COMMUNICATION CABLES –

**Part 1-123: Electrical test methods –
Test for attenuation constant of radiating cable**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61196-1-123 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, RF connectors, RF and microwave passive components and accessories. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
46A/1613/FDIS	46A/1625/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all the parts in the IEC 61196 series, published under the general title *Coaxial communication cables*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

COAXIAL COMMUNICATION CABLES –

Part 1-123: Electrical test methods –

Test for attenuation constant of radiating cable

1 Scope

This part of IEC 61196 defines the test method to determine the attenuation constant of radiating coaxial communication cables that are intended for use in wireless communication systems such as tunnels, railways, highways, subways, elevators and other confined areas in which conventional antenna transmission is not satisfactory or even impossible.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61196-1, *Coaxial communication cables – Part 1: Generic specification – General, definitions and requirements*

IEC 61196-4, *Coaxial communication cables – Part 4: Sectional specification for radiating cables*

3 Terms and definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61196-1 and IEC 61196-4 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.2 Abbreviated terms

CUT Cable under test

VNA Vector network analyser

4 Methodology

4.1 General

The measurements of attenuation for radiating cables can be carried out by one of the two following methods, where the free-space method shall be the arbitration method if there is an argument:


- free-space method;
- ground-level method.

4.2 Free-space method

The arrangement of the cable is given in Figure 1a) and Figure 1b), respectively. The cable is laid on non-metallic posts at a height of 1,5 m to 2 m.


NOTE Figure 1a) addresses a VNA test arrangement while Figure 1b) provides a power meter test arrangement. The end user can choose the method to be used.

The cable shall be at least 10λ , where λ is the cable wavelength of the measuring frequency, but not shorter than 50 m or 10λ , the larger value being applicable.

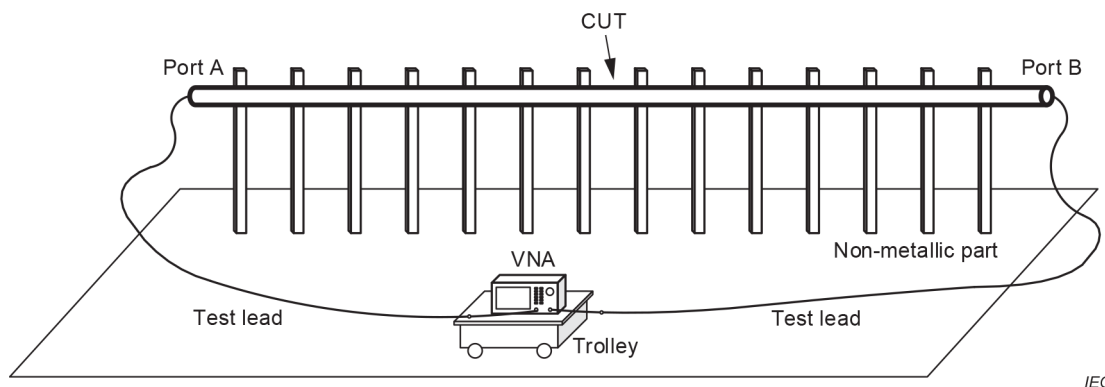

IEC

a) VNA test arrangement

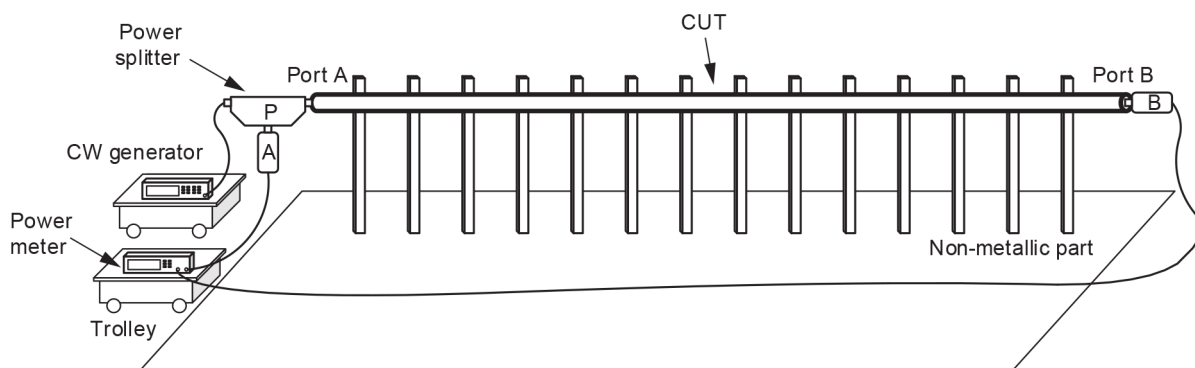

IEC

b) Power meter test arrangement


Figure 1 – Attenuation constant with free-space method

4.3 Ground-level method


The arrangement of the cable is given in Figure 2a) and Figure 2b), respectively. The cable is laid on non-metallic spacers, which gives the cable a distance from the concrete floor of 10 cm to 12 cm.

NOTE Figure 2a) addresses a VNA test arrangement while Figure 2b) provides a power meter test arrangement. The end user can choose the method to be used.

The cable shall be at least 10λ , where λ is the cable wavelength of the measuring frequency, but not shorter than 50 m or 10λ , the larger value being applicable.

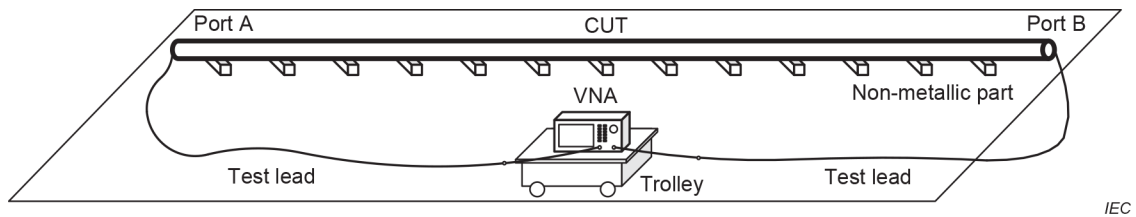

a) VNA test arrangement

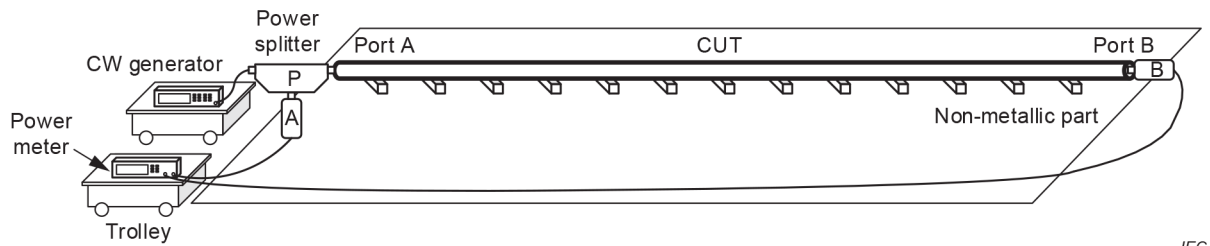

b) Power meter test arrangement

Figure 2 – Attenuation constant with ground-level method

5 Test procedures

5.1 General

For the VNA test arrangement, the attenuation constant is defined by:

$$\alpha = 10 \cdot \log \left(\frac{P_1}{P_2} \right) \cdot \frac{100}{l} \quad (1)$$

where

α is the attenuation constant, expressed in dB/100 m (frequency dependent);

P_1 is the input power of a receiver where the load impedance and the receiver impedance are equal and of the same value as the nominal value of the specimen, expressed in dBm;

P_2 is the output power of a source where the load impedance and the source impedance are equal and of the same value as the nominal value of the specimen, expressed in dBm;

l is the physical length of the specimen, expressed in m.

When calibration of the vector network analyzer (VNA) with S-parameter is performed, the attenuation constant can also be expressed as:

$$\alpha = -20 \times \log |S_{21}| \cdot \frac{100}{l} \quad (2)$$

For the field test arrangement, the attenuation constant is calculated as follows:

$$\alpha = (P_{\text{CUT}} - P_{\text{cal}}) \cdot \frac{100}{l} \quad (3)$$

where

P_{cal} is the power obtained at calibration, expressed in dB;

P_{CUT} is the power obtained at CUT, expressed in dB;

l is the physical length of the specimen, expressed in m.

5.2 Equipment

- A vector network analyzer (VNA) capable of performing S_{21} measurements and a THRU calibration kit shall be used.
- Two power meters, a power splitter and a RF CW generator shall be used.

5.3 Calibration

The attenuation of the test setup shall be measured over the whole specified frequency range according to the following test arrangements, respectively.

- For the VNA test arrangement, two test leads shall be used with a nominal impedance of the test system. A full two port calibration shall be performed according to instructions of the VNA via using either an OSL or E-cal kit. Temperature of the coaxial test leads shall be kept constant after calibration and during the CUT measurement to avoid uncertainty of the test result caused by instable attenuation of the test leads.
- For the power meter test arrangement, the power meter B is attached to the power splitter's port. For each frequency, the calibration power level is recorded:
 $P_{\text{cal}}(f) = P_{\text{A}}(f) - P_{\text{B}}(f)$.

5.4 Measurement

For the VNA test arrangement, the CUT should be connected to the calibrated test setup. The attenuation should be measured over the whole specified frequency range and at the same frequency points as for the calibration procedure within the specified frequency range.

For the power meter test arrangement, the CUT is connected between the port of the power splitter and power meter B.

For each frequency, the power level is recorded: $P_{\text{CUT}}(f) = P'_{\text{A}}(f) - P'_{\text{B}}(f)$.

The attenuation constant is calculated at each frequency: $\alpha(f) = P_{\text{CUT}}(f) - P_{\text{cal}}(f)$.

The CUT should be allowed to stabilize to the ambient temperature for a minimum period of 2 h.

The test data and ambient temperature should be recorded.

6 Expression of test results

6.1 Expression

The attenuation constant can be computed as:

$$\alpha(f) = \frac{\alpha_{\text{meas}}(f)}{l} \cdot 100 \quad (4)$$

where

$\alpha(f)$ is the normalized attenuation constant of the CUT, expressed in dB/100 m;

α_{meas} is the tested attenuation of the CUT, expressed in dB;

l is the physical length of the CUT, expressed in m.

6.2 Temperature correction

When a temperature correction is necessary, the attenuation constant should be corrected to the reference temperature of 20 °C with the following formula:

$$\alpha_{20}(f) = \frac{\alpha_T(f)}{1 + \frac{K}{100} \cdot (T - 20)} \quad (5)$$

where

K is the correction factor. Correction factor K should be defined in the related cable specification (e.g. for copper, coaxial with non-polar insulation $K = 0,2 \text{ \%/ } ^\circ\text{C}$);

T is the temperature during the measurement, expressed in °C;

$\alpha_T(f)$ is the attenuation constant at the temperature during measurement;

$\alpha_{20}(f)$ is the attenuation constant at 20 °C by temperature correction.

7 Test report

The test report should provide the following test conditions:

- ambient temperature;
- the length of CUT;
- attenuation constant (corrected to 20 °C).

8 Requirements

The attenuation constant shall not be higher than the values specified in the detail specification.

Bibliography

IEC 61196-1-113:2018, *Coaxial communication cables – Part 1-113: Electrical test methods – Test for attenuation constant*

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

3, rue de Varembé
PO Box 131
CH-1211 Geneva 20
Switzerland

Tel: + 41 22 919 02 11
info@iec.ch
www.iec.ch