



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

I.334

**INTEGRATED SERVICES DIGITAL
NETWORK (ISDN)**

**OVERALL NETWORK ASPECTS
AND FUNCTIONS**

**PRINCIPALS RELATING ISDN
NUMBERS/SUBADDRESSES TO
THE OSI REFERENCE MODEL NETWORK
LAYER ADDRESSES**

ITU-T Recommendation I.334

(Extract from the *Blue Book*)

NOTES

1 ITU-T Recommendation I.334 was published in Fascicle III.8 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation I.334

PRINCIPLES RELATING ISDN NUMBERS/SUBADDRESSES TO THE OSI REFERENCE MODEL NETWORK LAYER ADDRESSES

(Melbourne, 1988)

1. Introduction

Recommendation X.200, covering the open systems reference model, applies the term "address" to identify service access points at each layer. With respect to the network layer, a service access point may be identified by an ISDN number/subaddress. This Recommendation is provided to clarify the concepts and terminology which relate ISDN numbers and subaddresses to one another and to OSI reference model network layer addresses.

1.1 Basic relationships

The essential purpose of the network layer is to achieve routing of information within the Open Systems Interconnection (OSI) environment. To that purpose it may be useful to establish a correspondence between an ISDN address (ISDN number, possibly with subaddress) and an X.200 network layer service access point. However, an ISDN address may in some instances identify an end-system not conforming to the OSI model. In such cases the format and syntax of the subaddress are available for user-specific purposes. Section 2 summarizes the coding agreements which allow this flexibility. (The publication of the summary in this Recommendation is for information only and does not indicate administrative responsibility for contents nor assure current status of the material presented.)

1.2 NSAPs and ISDN addresses

The ISDN address (ISDN number, possibly with subaddress) may include the OSI network layer address and thereby offer means to identify Network Service Access Points (NSAPs). Figure 1/I.334 shows the three cases, a), b) and c) below, relating an ISDN address to a particular OSI NSAP address.

For completeness, references to protocol elements are included in the three cases which follow. For circuit mode access, the calling/called subaddress information elements associated with the Q.931 SET-UP message are used to transmit subaddress information, while the X.25 address extension field serves this purpose for packet mode access. For interoffice circuit mode calls, the Q.931 subaddress information elements may be transmitted within the access transport parameter of the Signalling System No. 7 (S.S. No. 7) initial address message. On packet mode internetwork calls, the X.75 address extension field is available to carry subaddress information.

The components of the OSI NSAP address are the AFI (Authority and Format Identifier), the IDI (Initial Domain Identifier) and possibly the DSP (Domain Specific Part) (see also § 3).

- a) The OSI NSAP address is comprised only of an AFI IDI, in which the IDI is semantically identical to the ISDN number. There is no DSP. A terminal can do one of the following:
 - a1) The entire NSAP is carried in the subaddress field; or
 - a2) If the conditions in § 1.3.1 are satisfied, the NSAP address can be inferred from the E.164 number.

Note - For circuit mode calls, the semantic content of the AFI may be contained in the numbering and addressing plan identification in the Q.931 or S.S. No. 7 calling/called address protocol elements. For packet mode calls, similar information may be found in the X.25/X.75 protocol. Until such time as a protocol mechanism for identifying the numbering plan and the type of number is implemented in X.25/X.75, analogous to that which exists in Q.931/S.S. No. 7, such information may be derivable from the X.25/X.75 address fields which may include a numbering plan escape code. It may also be possible for the semantic content of the AFI to be implied by network arrangements.

- b) The OSI NSAP address is comprised of an AFI + IDI + DSP, in which the IDI is semantically identical to the ISDN number. In this case, the entire NSAP address is carried in the subaddress/address extension field.
- c) The OSI NSAP address is comprised of an AFI + IDI + DSP, in which the IDI is not related to the ISDN number. The entire NSAP address is conveyed in the subaddress/address extension field.

	NAPI	ISDN number	ISDN subaddress	
a ¹⁾		IDI	AFI	IDI (Note 2)
a ²⁾	AFI (Note 1)	IDI		
b)		IDI	AFI	IDI (Note 2) DSP
c)		(Note 3)	AFI	IDI DSP

T1807661-88

Note 1 – The semantic content of AFI is contained in the numbering/addressing plan identification (NAPI) in the Q.931/X.25 address information element or implied by network arrangement.

Note 2 – The IDI of the OSI NSAP address is semantically identical to the ISDN number.

Note 3 – The ISDN number is not related to the NSAP address.

FIGURE 1/I.334

Relationship of NSAP address to ISDN number

1.3 *Encoding of NSAP addresses*

1.3.1 *Use of the AF (Address Field)*

Under certain conditions, the NSAP address, as defined in ISO 8348 AD2, may be conveyed entirely in the AF. These conditions are:

- a) the NSAP address consists solely of the IDP (i.e. the DSP is null);
- b) the AFI can be deduced from the contents of the AF (e.g. with knowledge of the subnetwork to which the DTE is attached); and
- c) the IDI is the same as the SNPA (Subnetwork Point of Attachment) address.

When all the above conditions are satisfied, the AF may be used to convey the semantics of the entire NSAP address (the AFI is implied and the contents of the AF are equivalent to the IDI). In these cases, the AEF (Address Extension Field) may also be used (see § 1.3.2).

1.3.2 Use of the AEF (Address Extension Field)

When the conditions in § 1.3.1 are not satisfied, the AEF shall be used. The NSAP address, complete with AFI, is placed in the AEF (type of subaddress is X.213/ISO 8348 AD2). In this case, the contents of the AF are not defined by this Recommendation.

1.4 Decoding of NSAP addresses

1.4.1 Absent AEF case

If the AEF is not present, then local knowledge is required by the receiving NL (Network Layer) entity to determine whether an OSI NSAP address is to be deduced from the content of the AF. If this local knowledge indicates that an NSAP address is present, its abstract syntax is as follows:

- a) the AFI is deduced from knowledge of the subnetwork from which the packet was received;
- b) the IDI is the same as the contents of the AF; and
- c) the DSP is absent.

1.4.2 AEF case

If the AEF is present and the type of subaddress is X.213/ISO 8348 AD2, then the NSAP address is contained entirely within the AEF. The abstract syntax is as follows:

- a) the AFI is contained within the first two digits of the AEF;
- b) the IDI is the remainder of the Initial Domain Part (IDP) after any leading and trailing padding digits are discarded; and
- c) the DSP, if present, constitutes the remainder of the AEF content after any trailing padding digits are discarded.

2 Means to specify the type of subaddress

Considering the three cases in which the NSAP address may be related to the ISDN address/subaddress, a mechanism which permits determination of the type of subaddress present may be useful in making distinctions. The method of distinction is dependent upon the protocol being used.


In the case of Q.931/I.451, 3 bits within octet 3 of each subaddress information element (i.e., calling and called party subaddress)¹⁾ establish the "type of subaddress". Two existing assignments, subject to change by responsible authorities are "user-specified" and "X.213/ISO 8348 AD2". All other values are reserved.

The actual subaddress information is coded beginning in octet 4 with the possibility of continuing up to octet 23, i.e., the subaddress information element has the capacity to carry a maximum of 20 octets of subaddress information.

- Under the X.213/ISO 8348 AD2 encoding of type of subaddress, the initial two digits of the subaddress represent the AFI which permits further distinction in subaddress encoding schemes as specified in Figure 2/I.334.
- Under the user-specified encoding of type of subaddress, the subaddress field is encoded according to user specifications subject to a maximum length of 20 octets.

In the case of packet mode calls using X.25/ISO 8208, bits within the first octet of the calling/called address extension facility parameter field indicate the "type of address extension" in a similar manner.

¹⁾ Octets 1 and 2 of the subaddress information elements serve as information element and length identifiers, respectively.

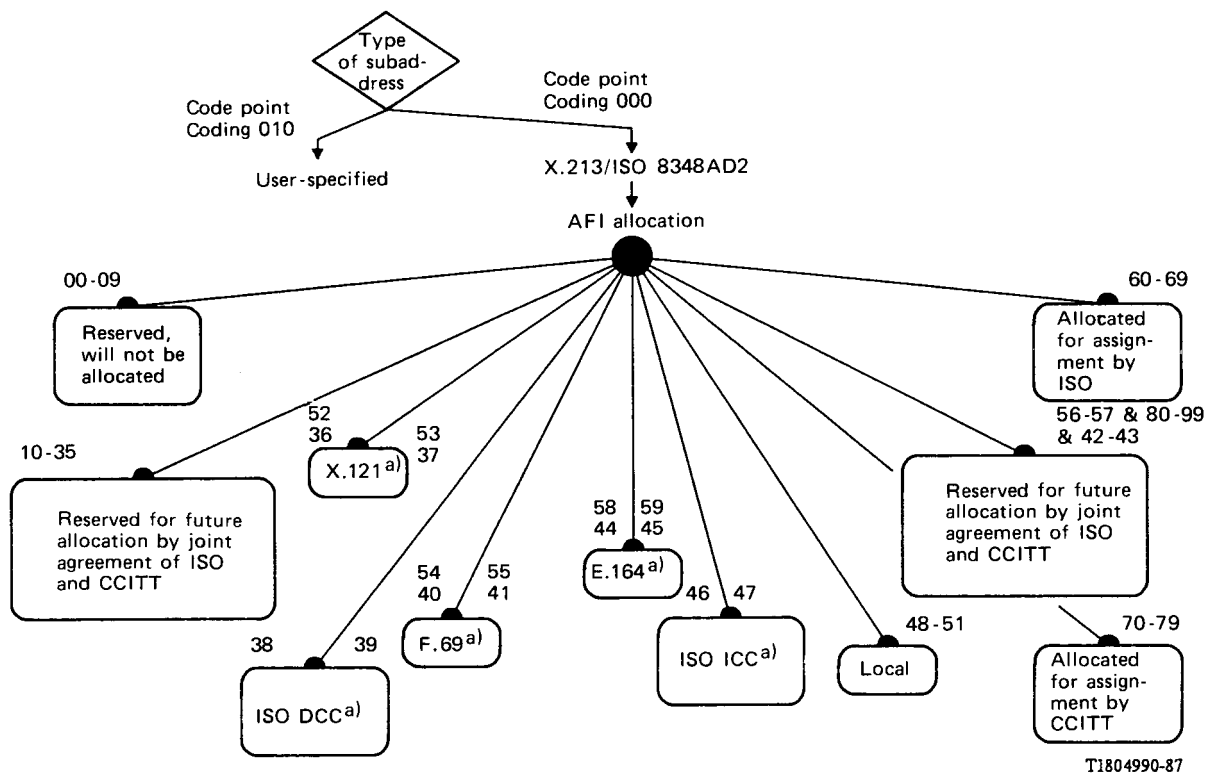


^{a)} The IDI format shown within the box is associated with the AFI values above the box. The AFI values on the left are indicative of decimal DSP syntax, whereas those on the right are associated with a binary DSP syntax. Where four AFI values are shown, the two numerically lowest AFI values indicate that, if present, leading zero digits in the IDI are not significant, and do not constitute part of the value of the IDI. The numerically greatest AFI values indicate that leading zero digits are significant.

FIGURE 2/I.334
NSAP address allocation

3 The OSI NSAP address format

For reference purposes, a description of terms used in connection with NSAP addresses is provided below:

The format of the NSAP address is:



T1805000-87

- IDP - Initial Domain Part. This is the part which contains all the internationally standardized parts of the NSAP address, i.e. those addresses and numbers which are controlled either by ISO or CCITT.
- AFI - Authority and Format Identifier. This 2-digit code indicates the authority responsible for the number following the AFI, such as X.121 or E.164 and the format of the DSP. This is always two digits and is allocated as per X.213/ISO 8348 AD2.
- IDI - Initial Domain Identifier. This may contain, for example, an E.164 or X.121 number. The networks which use these numbering schemes are termed subnetwork by ISO. The overall length of the field is determined by the maximum length of the number format being used.
- DSP - Domain Specific Part. In the context of an E.164 IDI, this part contains an address which is relevant only to the domain which has been accessed beyond the domain specified within the IDI, such as a PBX extension, a LAN terminal and so on. This is a variable length field, and is constrained by the length of the IDP, as the overall maximum length of the OSI NSAP address is 20 octets.