



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

M.330

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

**MAINTENANCE:
INTERNATIONAL TRANSMISSION SYSTEMS
(ANALOGUE)**

**NUMBERING OF GROUPS
WITHIN A SUPERGROUP**

ITU-T Recommendation M.330

(Extract from the *Blue Book*)

NOTES

1 ITU-T Recommendation M.330 was published in Fascicle IV.1 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1988, 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

Recommendation M.330

NUMBERING OF GROUPS WITHIN A SUPERGROUP

The position occupied by a group within a supergroup is identified by a number in the series from 1 to 5, the numbers being allocated in ascending order of frequency in the basic supergroup 312 kHz to 552 kHz and in descending order of frequency in the other supergroups. (See Figure 1/M.330.)

If all the groups comprising the supergroup are erect:

- the basic supergroup is said to be *erect*;
- the other supergroups are said to be *inverted*.

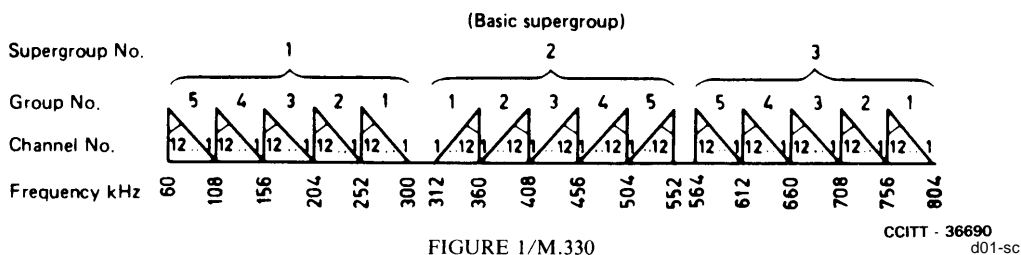


FIGURE 1/M.330
Numbering of 12 circuit groups and channels in supergroups

CCITT - 36690
d01-sc