



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

X.287

(03/99)

SERIES X: DATA NETWORKS AND OPEN SYSTEM
COMMUNICATIONS

Open Systems Interconnection – Layer Managed Objects

**Information technology – Open Systems
Interconnection – Structure of management
information: Managed objects for supporting
upper layers**

ITU-T Recommendation X.287

(Previously CCITT Recommendation)

ITU-T X-SERIES RECOMMENDATIONS
DATA NETWORKS AND OPEN SYSTEM COMMUNICATIONS

PUBLIC DATA NETWORKS	
Services and facilities	X.1–X.19
Interfaces	X.20–X.49
Transmission, signalling and switching	X.50–X.89
Network aspects	X.90–X.149
Maintenance	X.150–X.179
Administrative arrangements	X.180–X.199
OPEN SYSTEMS INTERCONNECTION	
Model and notation	X.200–X.209
Service definitions	X.210–X.219
Connection-mode protocol specifications	X.220–X.229
Connectionless-mode protocol specifications	X.230–X.239
PICS proformas	X.240–X.259
Protocol Identification	X.260–X.269
Security Protocols	X.270–X.279
Layer Managed Objects	X.280–X.289
Conformance testing	X.290–X.299
INTERWORKING BETWEEN NETWORKS	
General	X.300–X.349
Satellite data transmission systems	X.350–X.399
MESSAGE HANDLING SYSTEMS	X.400–X.499
DIRECTORY	X.500–X.599
OSI NETWORKING AND SYSTEM ASPECTS	
Networking	X.600–X.629
Efficiency	X.630–X.639
Quality of service	X.640–X.649
Naming, Addressing and Registration	X.650–X.679
Abstract Syntax Notation One (ASN.1)	X.680–X.699
OSI MANAGEMENT	
Systems Management framework and architecture	X.700–X.709
Management Communication Service and Protocol	X.710–X.719
Structure of Management Information	X.720–X.729
Management functions and ODMA functions	X.730–X.799
SECURITY	X.800–X.849
OSI APPLICATIONS	
Commitment, Concurrency and Recovery	X.850–X.859
Transaction processing	X.860–X.879
Remote operations	X.880–X.899
OPEN DISTRIBUTED PROCESSING	X.900–X.999

For further details, please refer to ITU-T List of Recommendations.

INTERNATIONAL STANDARD 10165-8

ITU-T RECOMMENDATION X.287

**INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION –
STRUCTURE OF MANAGEMENT INFORMATION: MANAGED OBJECTS
FOR SUPPORTING UPPER LAYERS**

Summary

This Recommendation | International Standard defines upper-layer managed objects. It establishes a model for common supporting upper-layer objects and provides generic and formal definition for common supporting upper-layer information (managed objects). In this context, supporting upper layers mean ACSE, Presentation and Session layers.

Source

The ITU-T Recommendation X.287 was approved on the 26th of March 1999. The identical text is also published as ISO/IEC International Standard 10165-8.

FOREWORD

ITU (International Telecommunication Union) is the United Nations Specialized Agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of the ITU. The ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Conference (WTSC), which meets every four years, establishes the topics for study by the ITU-T Study Groups which, in their turn, produce Recommendations on these topics.

The approval of Recommendations by the Members of the ITU-T is covered by the procedure laid down in WTSC Resolution No. 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation the term *recognized operating agency (ROA)* includes any individual, company, corporation or governmental organization that operates a public correspondence service. The terms *Administration*, *ROA* and *public correspondence* are defined in the *Constitution of the ITU (Geneva, 1992)*.

INTELLECTUAL PROPERTY RIGHTS

The ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. The ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, the ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

ITU 1999

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

CONTENTS

	<i>Page</i>
1 Scope	1
2 Normative references	1
2.1 Identical ITU-T Recommendations International Standards	1
2.2 Paired ITU-T Recommendations International Standards equivalent in technical content	2
2.3 Additional references	2
3 Definitions	2
3.1 Basic reference model definitions	2
3.2 Management framework definitions	3
3.3 CMIS definitions	3
3.4 Remote Operations definitions	3
3.5 Systems management overview definitions	3
3.6 Management information model definitions	3
3.7 Guidelines for the definition of managed objects definitions	3
4 Symbols and abbreviations	4
5 Conventions	4
6 Overview	4
6.1 Upper Layer Model	5
6.2 Managed Object Hierarchy	6
6.3 Inheritance	9
6.4 Relationships	10
6.5 Session and presentation layer invocations	10
6.6 Application entity and application entity invocations	11
7 Generic definitions	12
7.1 Imported definitions	12
7.2 Session layer managed object classes	13
7.3 Presentation layer managed object classes	14
7.4 Application layer managed object classes	15
7.5 Name bindings	16
Annex A – Monolithic Upper Layer	17
A.1 Monolithic Upper Layer Subsystem	17
A.2 Monolithic Upper Layer Entity	17
A.3 Monolithic Upper Layer Connection	17
Annex B – Management Information Definitions	19

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – STRUCTURE OF MANAGEMENT INFORMATION: MANAGED OBJECTS FOR SUPPORTING UPPER LAYERS

1 Scope

This Recommendation | International Standard defines generic upper-layer managed objects.

This Recommendation | International Standard:

- establishes a model for common supporting upper layer objects;
- provides generic and formal definitions for common supporting upper layer information (managed objects).

This Recommendation | International Standard does not:

- define new management functions;
- specify a framework or methodology for conformance tests.

In the context of this Recommendation | International Standard, the term *Supporting Upper Layers* is used to refer to ACSE, Presentation, and Session layers.

2 Normative references

The following ITU-T Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of current valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of the currently valid ITU-T Recommendations.

2.1 Identical ITU-T Recommendations | International Standards

- ITU-T Recommendation X.200 (1994) | ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic reference model: The basic model.*
- ITU-T Recommendation X.207 (1993) | ISO/IEC 9545:1994, *Information technology – Open Systems Interconnection – Application layer structure.*
- ITU-T Recommendation X.217 (1995) | ISO/IEC 8649:1996, *Information technology – Open Systems Interconnection – Service definition for the association control service element: Protocol specification.*
- ITU-T Recommendation X.226 (1994) | ISO/IEC 8823-1:1994, *Information technology – Open Systems Interconnection – Connection-oriented presentation protocol: Protocol specification.*
- ITU-T Recommendation X.227 (1995) | ISO/IEC 8650-1:1996, *Information technology – Open Systems Interconnection – Connection-oriented protocol for the association control service element: Protocol specification.*
- ITU-T Recommendation X.283 (1997) | ISO/IEC 10733:1998, *Information technology – Elements of management information related to the OSI Network layer.*
- ITU-T Recommendation X.284 (1997) | ISO/IEC 10737:1998, *Information technology – Elements of management information related to the OSI Transport layer.*

- ITU-T Recommendation X.501 (1997) | ISO/IEC 9594-2:¹ *Information technology – Open Systems Interconnection – The Directory: Models.*
- ITU-T Recommendation X.650 (1996) | ISO/IEC 7498-3:1997, *Information technology – Open Systems Interconnection – Basic reference model: Naming and addressing.*
- ITU-T Recommendation X.701 (1997) | ISO/IEC 10040:1998, *Information technology – Open Systems Interconnection – Systems management overview.*
- ITU-T Recommendation X.710 (1997) | ISO/IEC 9595:1998, *Information technology – Open Systems Interconnection – Common management information service.*
- ITU-T Recommendation X.711 (1997) | ISO/IEC 9596-1:1998, *Information technology – Open Systems Interconnection – Common management information protocol: Specification.*
- CCITT Recommendation X.720 (1992) | ISO/IEC 10165-1:1993, *Information technology – Open Systems Interconnection – Structure of management information: Management information model.*
- CCITT Recommendation X.721 (1992) | ISO/IEC 10165-2:1992, *Information technology – Open Systems Interconnection – Structure of management information: Definition of management information.*
- CCITT Recommendation X.722 (1992) | ISO/IEC 10165-4:1992, *Information technology – Open Systems Interconnection – Structure of management information: Guidelines for the definition of managed objects.*
- ITU-T Recommendation X.723 (1993) | ISO/IEC 10165-5:1994, *Information technology – Open Systems Interconnection – Structure of management information: Generic management information.*
- ITU-T Recommendation X.727 (1999) | ISO/IEC 10165-9:¹ *Information technology – Open Systems Interconnection – Structure of management information: Systems management application layer managed objects.*

2.2 Paired ITU-T Recommendations | International Standards equivalent in technical content

- CCITT Recommendation X.208 (1988), *Specification of Abstract Syntax Notation One (ASN.1).*
ISO/IEC 8824:1990, *Information technology – Open Systems Interconnection – Specification of Abstract Syntax Notation One (ASN.1).*
- CCITT Recommendation X.290 (1995), *OSI conformance testing methodology and framework for protocol Recommendations for ITU-T applications – General concepts.*
ISO 9646-1:1994, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 1: General concepts.*
- CCITT Recommendation X.700 (1992), *Management framework for Open Systems Interconnection (OSI) for CCITT Applications.*
- ISO/IEC 7498-4:1989, *Information processing systems – Open Systems Interconnection – Basic Reference Model – Part 4: Management framework.*

2.3 Additional references

- ITU-T Recommendation M.3100 (1995), *Generic network information model.*

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply.

3.1 Basic reference model definitions

This Recommendation | International Standard makes use of the following terms defined in ITU-T Rec. X.200 | ISO/IEC 7498-1:

- a) open system;
- b) systems management.

¹ To be published.

3.2 Management framework definitions

This Recommendation | International Standard makes use of the following terms defined in CCITT Rec. X.700 | ISO/IEC 7498-4:

- a) managed object;
- b) systems management application-entity.

3.3 CMIS definitions

This Recommendation | International Standard makes use of the following terms defined in ITU-T Rec. X.710 | ISO/IEC 9595:

- a) attribute;
- b) Common Management Information Service Element;
- c) Common Management Information Service.

3.4 Remote Operations definitions

This Recommendation | International Standard makes use of the following terms defined in CCITT Rec. X.219 | ISO/IEC 13712-1:

- a) invoker;
- b) performer.

3.5 Systems management overview definitions

This Recommendation | International Standard makes use of the following terms defined in ITU-T Rec. X.701 | ISO/IEC 10040:

- a) agent;
- b) agent role;
- c) generic definitions;
- d) managed object class;
- e) managed (open) system;
- f) manager;
- g) manager role;
- h) MIS-User;
- i) notification;
- j) notification type;
- k) systems management application protocol;
- l) systems management functional unit.

3.6 Management information model definitions

This Recommendation | International Standard makes use of the following terms defined in CCITT Rec. X.720 | ISO/IEC 10165-1:

- a) attribute type;
- b) containment hierarchy.

3.7 Guidelines for the definition of managed objects definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.722 | ISO/IEC 10165-4:

- template.

4 Symbols and abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply.

ACSE	Association Control Service Element
AE	Application Entity
AEI	Application Entity Invocation
ALS	Application Layer Structure
AP	Application Process
API	Application Process Invocation
ASE	Application Service Element
ASO	Application Service Object
CL	Connectionless
CMISE	Common Management Information Service Element
CO	Connection Oriented
DN	Distinguished Name
FU	Functional Unit
GMI	Generic Management Information
OSI	Open Systems Interconnection
PDU	Protocol Data Unit
PM	Protocol Machine
PPDU	Presentation Layer PDU
PSA	Presentation Layer SAP
RDN	Relative Distinguished Name
ROSE	Remote Operations Service Element
SAP	Service Access Point
SMASE	Systems Management Application Service Element
SSAP	Session Layer SAP
TSAP	Transport Layer SAP
TSDU	Transport Service Data Unit
UL	Upper Layer

5 Conventions

This Recommendation | International Standard makes use of the template notation defined in CCITT Rec. X.722 | ISO/IEC 10165-4 as the notation for defining managed object classes and the abstract syntax notation defined in CCITT Rec. X.208 | ISO/IEC 8824 as the means of defining ASN.1 data types associated with the use of template notation.

6 Overview

This Recommendation | International Standard defines Managed Objects that represent OSI Management's view of those elements of an Open System which support the OSI Session, Presentation and Application Layer services subject to OSI management operations.

The defined objects are of four different kinds:

- Communication Entities representing active functional elements which perform communication processing functions within a system.
- Protocol Machines performing communications functions within an entity.
- Service AccessPoints at which services are provided by an entity to the user entity.
- Connections and Associations established between entities for the transfer of service or protocol data.

The first three kinds of objects are of a static nature, and the last kind is of a more dynamic nature.

6.1 Upper Layer Model

The relationship between the Upper Layer object at each layer follows the structure as defined in the lower layers. This structure of objects in the lower layers, as defined by ITU-T Rec. X.283 | ISO/IEC 10733, Elements of management information related to the OSI Network layer and ITU-T X.284 | ISO/IEC 10737, Elements of management information related to the OSI Transport layer, is as illustrated in Figure 1.

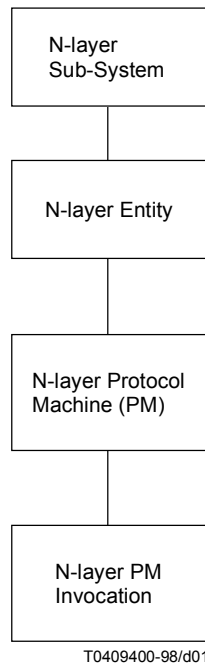


Figure 1 – Generic OSI Layer Containment Hierarchy

N-Layer subsystems are subclasses of the managed object class "Rec. X.723 | ISO/IEC 10165-5:1994":subsystem. This managed object class is used as a common containment point for managed objects in a system that relates to the operation on the N-layer.

N-layer entities are subclasses of the managed object class "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntity. This managed object class is used to represent the active functional elements which perform communications processing functions within a system, e.g. Network Entity, Transport Entity, etc. The localSapNames attribute contains a set of distinguished names of layer (N–1) SAPs or ports at which services are provided to the entity.

N-layer protocol machines are subclasses of either "Rec. X.723 | ISO/IEC 10165-5:1994":clProtocolMachine or "Rec. X.723 | ISO/IEC 10165-5:1994":coProtocolMachine. These represent the protocol machine performing communications (connectionless-mode or connection-mode, respectively) within an entity. The information represented may include the information across all invocations initiated by this protocol machine. A protocol machine includes the mechanism for both the establishment and data-transfer phases of the communications.

N-layer invocations are subclasses of "Rec. X.723 | ISO/IEC 10165-5:1994":singlePeerConnection and represent an association or a connection established between N-layer entities for the transfer of service or protocol data (using an N-layer protocol of the N-layer protocol machine). The underlyingconnectionNames attribute contains the distinguished names of the managed objects that represent the underlying connections or physical media used by the connection (i.e. supporting service invocation).

This same model essentially applies to all the layers in the OSI model. However, at the application layer, the protocol machine is actually composed of different protocol modules or components called Application Service Objects (ASOs). These components represent the different establishment (and termination) and data transfer phases of communication.

Generally, ACSE (a subclass of ASO) will be the ASO that provides the establishment phase with one or more other ASOs composing the data transfer phase. Although the ASOs are often referred to as protocol machines themselves, they actually represent only a component. While it is true that certain ASOs may have a state machine (e.g. CMISE PM, SMASE PM, ACSE PM), it is only the combination of ASOs and ACSE that constitutes a protocol machine in the same sense as the lower layers, i.e. containing both the establishment and data transfer phases.

As a result, in this Application Layer Model, it may be necessary to show the "structure" of the "constructed" PM in terms of its ASOs. This same "structure" is also reflected in the PM's invocations of the ASOs. The relationship between a PM and its ASOs (i.e. its "structure") is represented by naming. Naming may also be used to show the relationship between the invocation of an application layer PM and its component ASO. If naming is used to represent the components of a PM and its invocation, the naming structures of an application layer PM and that of its invocation should be isomorphic. (See Figures 7 and 8.)

Because the Application Layer PM is a composition, it is not modelled as a separate object from its entity, the Application Entity. Rather, only the component PMs, the ASOs, are represented as managed objects. Therefore, in the application layer, the application layer entity and its PM are modelled as one object, called the Application Entity (AE). This object then contains or is related to the objects that represent the modules or components of the PM; these objects are ASOs or subclasses of ASO. Also in order to represent the structure of the component invocations in the same configuration as the components themselves the invocation of this application Layer PM, called Application Entity Invocation, is modelled as a separate object in order to represent the structure of the component invocations (e.g. it can be used as the "container" of the component invocations).

In the lower layers as seen above, the PM invocations are contained in their respective PMs. Unlike the lower layers, however, the Application Layer models the components of the protocol machine and its invocations. Therefore, in the application layer model, an invocation has a relationship to both its corresponding PM component and its superior invocation. The relationship between a component invocation and its containing invocation object is represented by naming, in which the component invocations are named with respect to the application layer invocation object and represent the structure of the invocation. Each component invocation has a pointer to its corresponding PM component. This relationship is represented by the attribute invocationOfPointer. If the structure of the PM is simple enough, this relationship may be represented by naming. See Figure 4 for possible name bindings.

For the Application Layer Structure (ALS) defined in ITU-T Rec. X.227 | ISO/IEC 8650-1, the concept of an Application Service Object (ASO) and its recursive structure also needs to be modelled. An ASO is an element within an AE representing a set of capabilities: it contains two or more ASOs combined with a Control Function (CF) that controls the interactions among its components.

The term ASE is used to refer to specialized ASOs that cannot be decomposed, that is, they cannot be composed of other ASOs.

Specific ASEs are modelled as subclasses of ASO.

An ASO that contains an Establishment ASE (e.g. ACSE) and at least one data transfer ASE is called an ASO Entity. An AE is a specialized ASO Entity that includes an Establishment ASE (e.g. ACSE) among its ASO(s) and/or ASE(s); it is always the outermost ASO Entity in an Application Layer which refers to a PSAP. An AE can also contain the following: ASO Entities which include ACSE (ASOEs); ASOs which do not contain ACSE; and ASEs.

With respect to specialized ASEs, only the management of ACSE is standardized in this Recommendation | International Standard. Management of other ASEs, like CMISE, ROSE, SMASE etc. might be specified in other standards.

6.2 Managed Object Hierarchy

6.2.1 Session Layer Managed Object Classes

The following managed object classes are defined for the session layer:

- a) Session Entity;
- b) Session Connection-oriented Protocol Machine;
- c) S (Session) SAP;
- d) Session Connection;
- e) Session Subsystem.

The session layer containment hierarchy is illustrated in Figure 2.

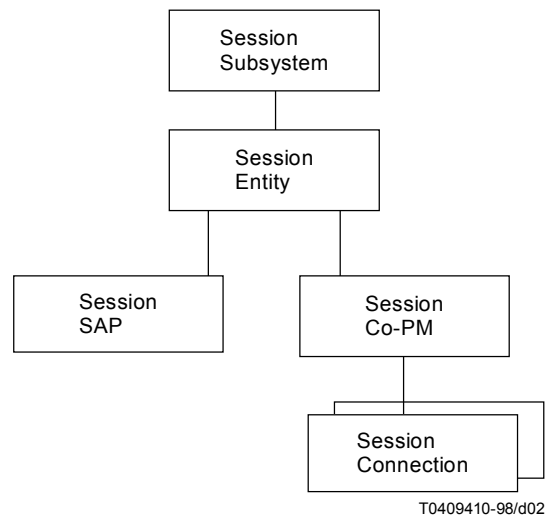


Figure 2 – Session Layer Containment Hierarchy

6.2.2 Presentation Layer Managed Object Classes

The following managed object classes are defined for the presentation layer:

- f) Presentation Entity;
- g) Presentation Connection-oriented Protocol Machine;
- h) P (Presentation) SAP;
- i) Presentation Connection;
- j) Presentation Subsystem.

The presentation layer containment hierarchy is illustrated in Figure 3.

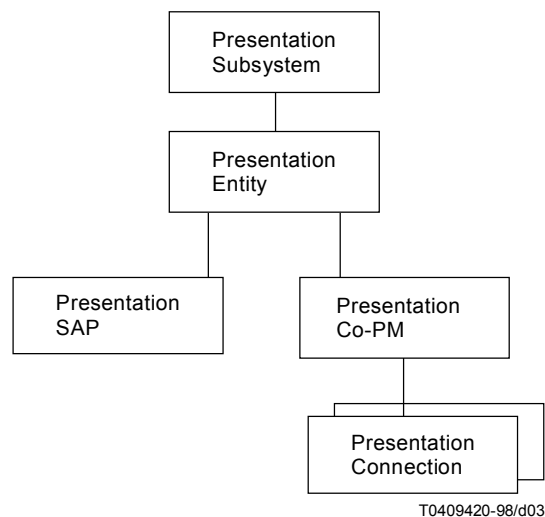


Figure 3 – Presentation Layer Containment Hierarchy

6.2.3 Application Layer Managed Object Classes

The following managed objects are defined for the application layer:

- k) Application Entity;
- l) Application Entity Invocation;
- m) ACSE;
- n) ACSE Association;
- o) Application Subsystem;
- p) AP (Application Process) Invocation;
- q) ASO Entity;
- r) ASO;
- s) ASO Invocation.

A generic application layer containment hierarchy is illustrated in Figure 4.


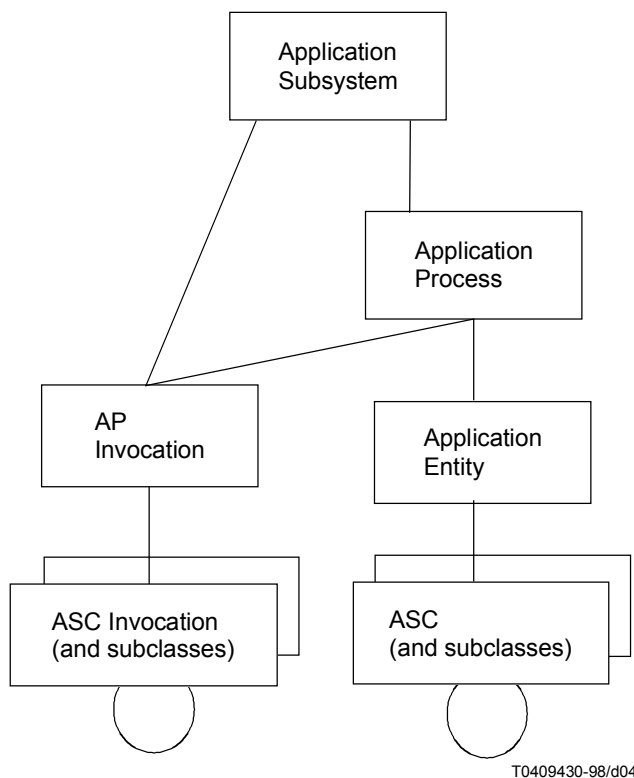


Figure 4 – Generic Application Layer Containment Hierarchy

6.3 Inheritance

The inheritance hierarchy for the managed object classes defined for the session, presentation and application layers is illustrated below in Figure 5.

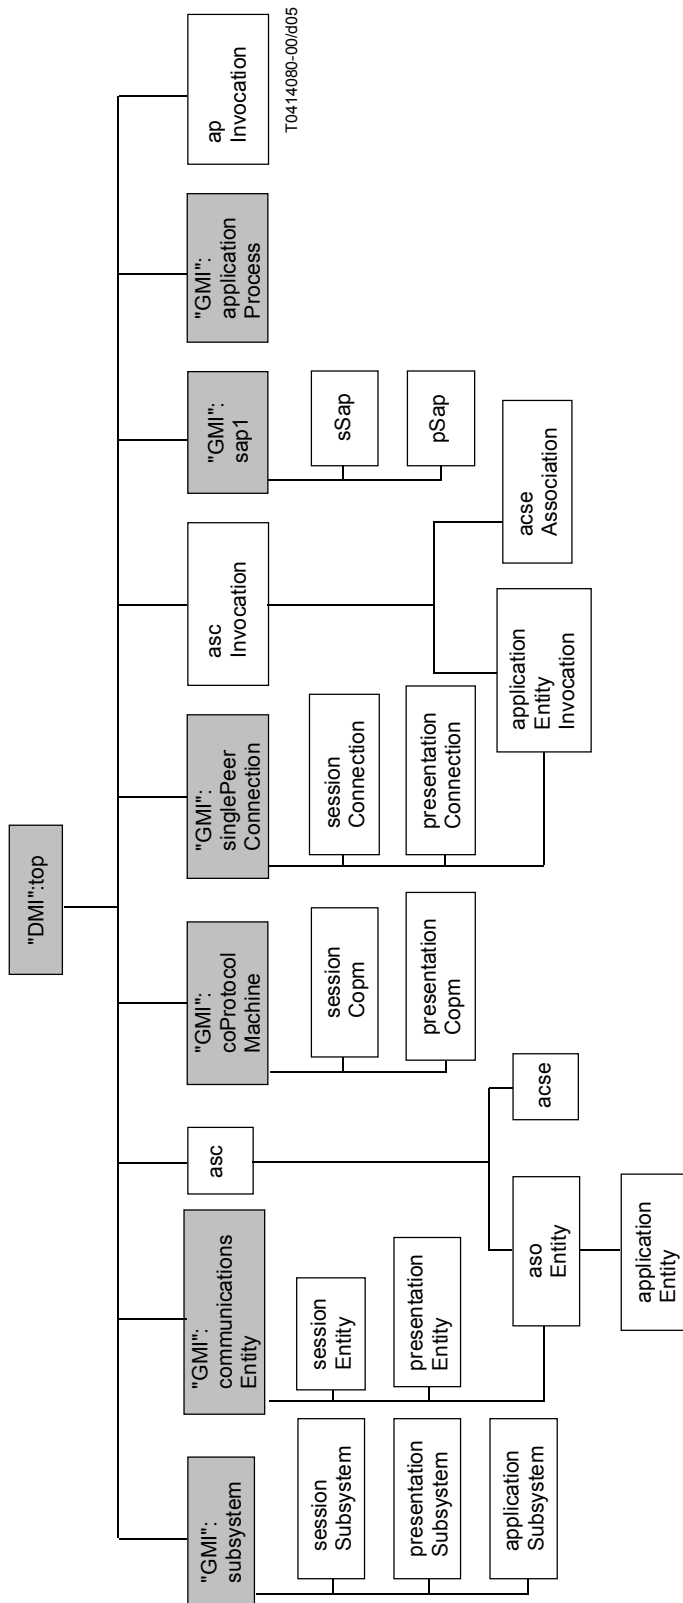

Shaded object classes are defined in other Recommendations/International Standards

"DMI"="Rec. X.721 | ISO/IEC 10165-2 : 1992"

"GMI"="Rec. X.723 | ISO/IEC 10165-5 : 1995"

Figure 5 – Inheritance Hierarchy of Upper Layer Objects

6.4 Relationships

6.4.1 Layer N-1 Services

Each entity has a relation to the SAP managed object of its underlying layer.

6.4.2 Connections

There is a relationship between a connection/association and its underlying connection managed objects. At the presentation and session layers, and for entities at the application layer (i.e. ASO Entities, Application Entity), there is a relationship between a connection/association and its underlying connection managed object. The underlyingConnectionNames attribute pointer is used to represent this relationship. For example, the presentation connection is related to the session connection via the underlyingConnectionNames attribute pointer. An Application Entity Invocation points to its presentation Connection using the same attribute pointer.

6.5 Session and presentation layer invocations

Figure 6 illustrates the various relationships among managed objects at the session and presentation layers. These relationships are represented either via containment (illustrated as straight lines) or via pointer attributes (illustrated as arrowed lines).

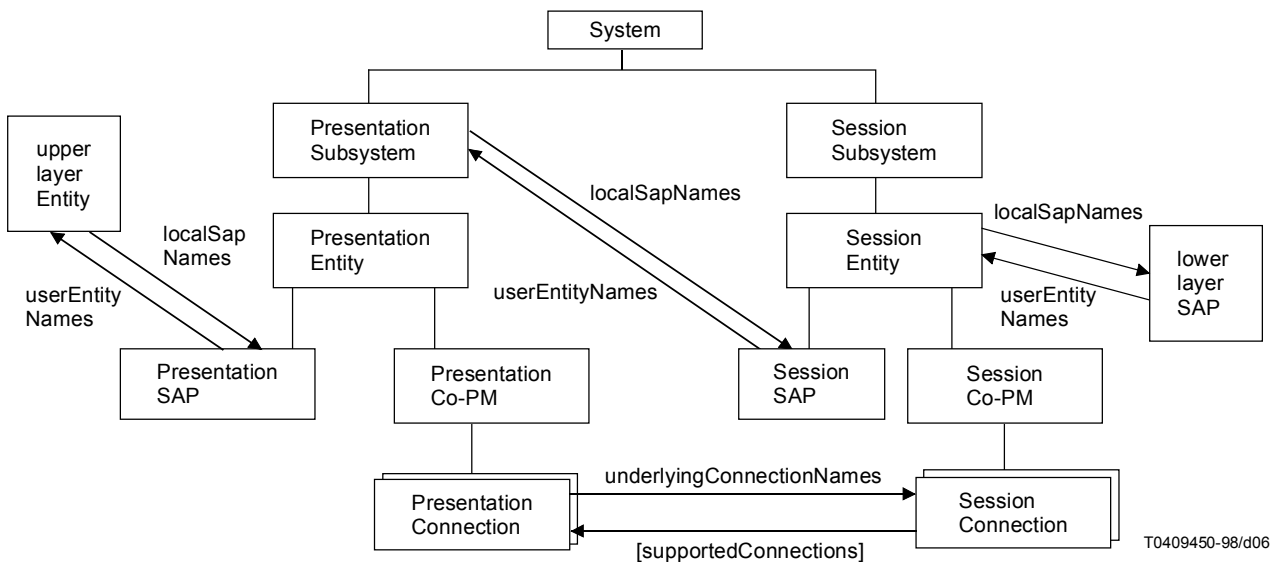


Figure 6 – Presentation and Session Layer Relationships

6.6 Application entity and application entity invocations

An example of a containment hierarchy for a typical application layer using ACSE and other ASEs appears in Figure 7. This figure also identifies the other relationships between object instances represented by pointer attributes (illustrated as arrowed lines). Figure 8 shows an example for a generic application layer using ASO Entities, ASOs and ASEs.

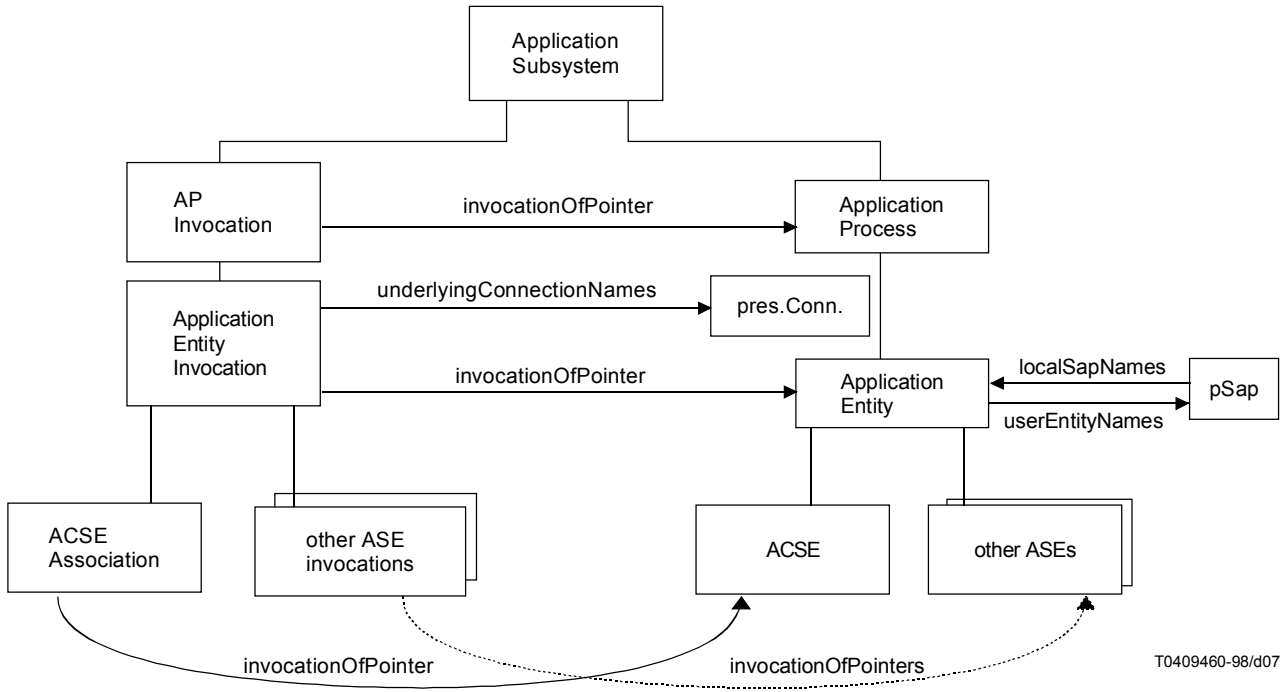



Figure 7 – Application Layer Containment Hierarchy with ACSE

The solid lines represent containment relationships between managed object instances. Containment relationships are used to determine the Distinguished names for managed object instances (i.e. the contained managed object instance is named within the scope of the containing managed object instance). An arrowed line represents a relationship attribute (i.e. pointer from one managed object instance to another).

An Application process is part of an open system. A managed open system (represented by a managed object such as system managed object defined in CCITT Rec. X.721 | ISO/IEC 10165-2 or managedElement managed object defined in ITU-T Rec. M.3100) may contain zero or more Application processes in its application subsystem. An Application process may also be contained in the system object directly. In this case, the Application Entity is contained in the Application Subsystem rather than the Application Process.

The name of the application entity is its application entity title, and the name of the application process is its application process title. It is possible, with the proper name bindings and choice of naming attributes, to have the name of the managed objects representing an Application entity and its Application process to be the same as the Distinguished Names of their form 1 Application entity title and Application process title, respectively.

To enable naming harmony between the AE-title and the name of the AE managed object, the naming attribute (Relative Distinguished Name / RDN) of the Application entity managed object instance must be the form 1 Application entity qualifier.

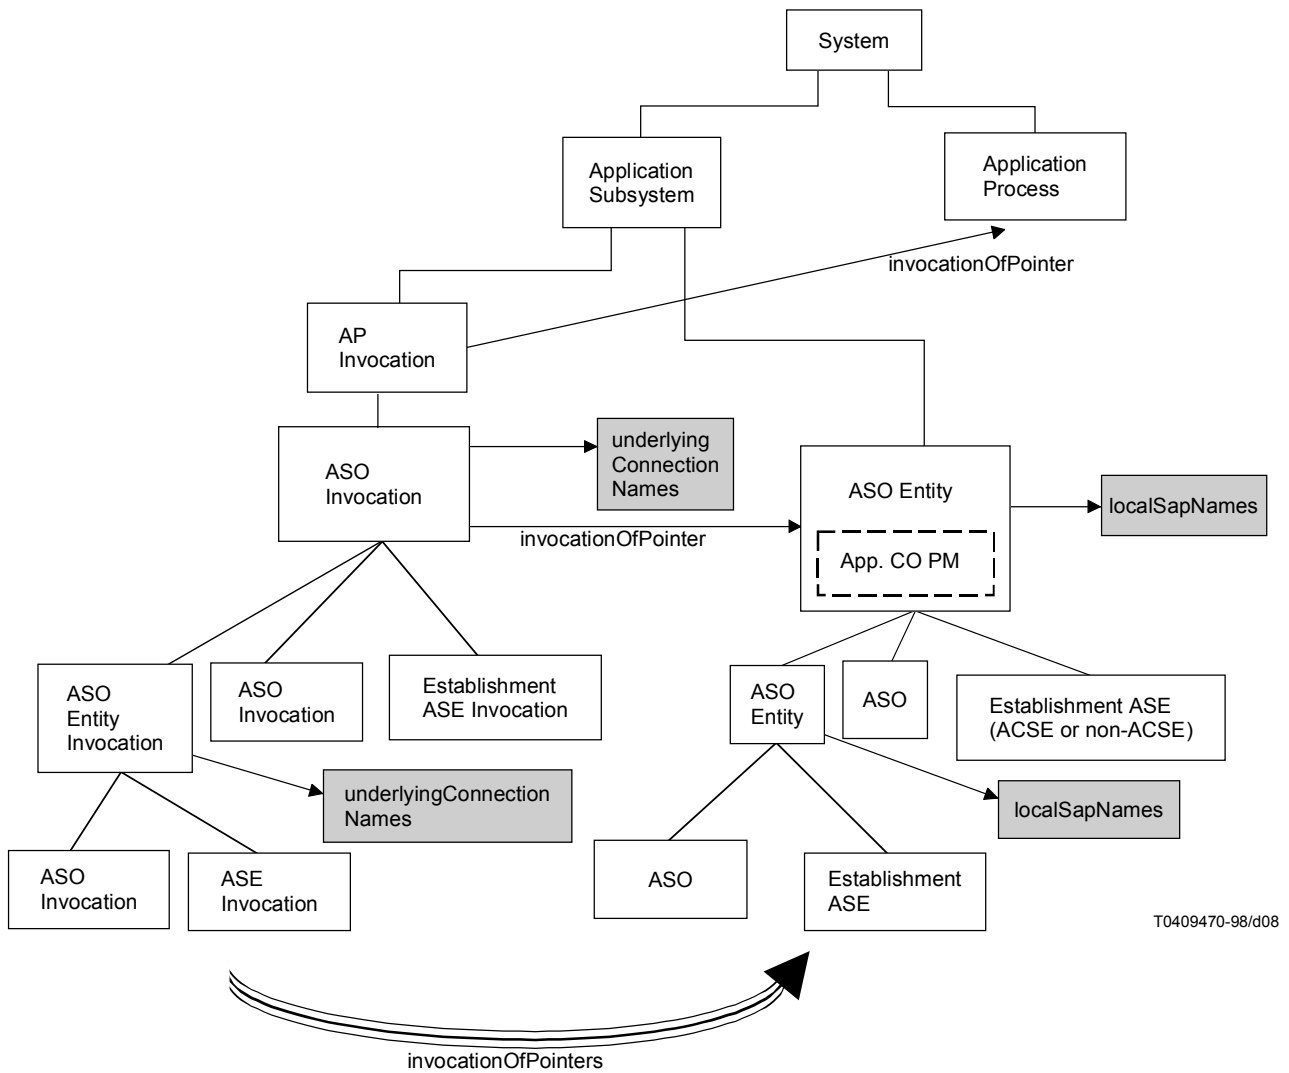

T0409470-98/d08

NOTE 1 – Each component of the uppermost ASO Invocation points to its corresponding component under the ASO Entity.

NOTE 2 – An ASO Entity must contain an Establishment ASE (may be ACSE or non-ACSE).

NOTE 3 – In this figure, the ASO Invocation structure is isomorphic to its corresponding ASO Entity structure.

NOTE 4 – Entities that are shaded are outside the scope of this Application Layer.

NOTE 5 – Solid lines indicate containment relationships, arrowed lines indicate attribute pointer relationships.

Figure 8 – Generic Application Layer Containment Hierarchy

7 Generic definitions

7.1 Imported definitions

7.1.1 Imported managed object classes

The following managed object classes and their associated attributes are imported from ITU-T Rec. X.723 | ISO/IEC 10165-5 and CCITT Rec. X.721 | ISO/IEC 10165-2:

- "Rec. X.723 | ISO/IEC 10165-5:1994":applicationProcess
- "Rec. X.723 | ISO/IEC 10165-5:1994":applicationProcessId
- "Rec. X.723 | ISO/IEC 10165-5:1994":applicationProcessTitle
- "Rec. X.723 | ISO/IEC 10165-5:1994":supportEntityNames
- "Rec. X.721 | ISO/IEC 10165-2:1992":operationalState

- "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntity
 - "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntityId
 - "Rec. X.723 | ISO/IEC 10165-5:1994":localSapNames
 - "Rec. X.721 | ISO/IEC 10165-2:1992":operationalState
- "Rec. X.723 | ISO/IEC 10165-5:1994":coProtocolMachine
 - "Rec. X.723 | ISO/IEC 10165-5:1994":coProtocolMachineId
 - "Rec. X.721 | ISO/IEC 10165-2:1992":operationalState
- "Rec. X.723 | ISO/IEC 10165-5:1994":Sap1
 - "Rec. X.723 | ISO/IEC 10165-5:1994":sapId
 - "Rec. X.723 | ISO/IEC 10165-5:1994":sap1Address
 - "Rec. X.723 | ISO/IEC 10165-5:1994":userEntityNames
- "Rec. X.723 | ISO/IEC 10165-5:1994":Single peer connection
 - "Rec. X.723 | ISO/IEC 10165-5:1994":connectionId
 - "Rec. X.723 | ISO/IEC 10165-5:1994":underlyingConnectionNames
 - "Rec. X.723 | ISO/IEC 10165-5:1994":supportedConnectionNames (conditional)
- "Rec. X.723 | ISO/IEC 10165-5:1994":subsystem
 - "Rec. X.723 | ISO/IEC 10165-5:1994":subsystemId

7.1.2 Imported name bindings

The following name bindings are imported from ITU-T Rec. X.723 | ISO/IEC 10165-5:

- applicationProcess-system;
- communicationsEntity-subsystem;
- coProtocolMachine-communicationsEntity;
- sap1-communicationsEntity;
- singlePeerConnection-coProtocolMachine;
- subsystem-system.

The communicationsEntity-subsystem namebinding is used for naming instances of sessionEntity with respect to sessionSubsystem and for naming instances of presentationEntity to presentationSubsystem.

The coProtocolMachine-communicationsEntity namebinding is used for naming instances of sessionCopl with respect to sessionEntity and for naming instances of presentationCopl with respect to presentationEntity.

The sap1-communicationEntity namebinding is used for naming instances of sSap to sessionEntity and for naming instances of pSap to presentationEntity.

The singlePeerConnection-coProtocolMachine namebinding is used for naming instances of sessionConnection to sessionCopl and for naming instances of presentationConnection to presentationCopl.

7.2 Session layer managed object classes

7.2.1 Session Subsystem

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":subsystem holds reference information about Session subsystem.

It specializes by adding only behaviour.

7.2.2 Session Entity

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntity holds reference information about Session entity.

It specializes by adding only behaviour.

ISO/IEC 10165-8 : 1999 (E)

7.2.3 Session COPM

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":coProtocolMachine holds reference information pertaining to the capabilities of a Session protocol machine.

It specializes by adding the following attributes:

- Session protocol versions supported (bitstring);
- Session functional units supported (bitstring);
- Session optional support requirements (i.e. segmenting).

7.2.4 SSAP

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":sap1 has the S-selector and the binding between the Presentation Entity and the sap.

It specializes by adding only behaviour.

7.2.5 Session Connection

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":singlePeerConnection holds reference information pertaining to the single session connection for the association. The underlying connections attribute is used to point to the transport connection used.

It specializes by adding the following attributes:

- Session protocol version in use;
- Session functional units negotiated in use;
- it may have an attribute for the negotiated maximum TSDU size if segmenting is in use.

NOTE – Subclasses of this object class may be defined to include statistics on PPDU transfers which take place over the connection.

7.3 Presentation layer managed object classes

7.3.1 Presentation Subsystem

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":subsystem holds reference information about Presentation Subsystem.

It specializes by adding only behaviour.

7.3.2 Presentation Entity

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntity holds reference information about Presentation Entity.

It specializes by adding only behaviour.

7.3.3 Presentation COPM

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":coProtocolMachine holds reference information pertaining to the capabilities of a Presentation protocol machine.

It specializes by adding the following attributes:

- Presentation functional units supported (bitstring);
- Abstract syntaxes supported (set of OBJECT IDENTIFIER);
- Transfer syntaxes supported (set of OBJECT IDENTIFIER).

7.3.4 PSAP

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":sap1 has the P-selector and the binding between the AE and the sap.

It specializes by adding only behaviour.

7.3.5 Presentation Connection

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":singlePeerConnection holds reference information pertaining to the single presentation connection for the association. The underlying connections attribute is used to point to the session connection endpoint used.

It specializes by adding the following attributes:

- presentation functional units negotiated in use;
- presentation contexts in use.

NOTE – Subclasses of this object class may be defined to include statistics on PPDU transfers which take place over the connection.

7.4 Application layer managed object classes

7.4.1 Application entity

This subclass of asoEntity holds reference information about an Application entity and its associated ACSE protocol machine.

It specializes by adding behaviour which restricts the values of its asoEntity attributes.

7.4.2 Application subsystem

This subclass of "Rec. X.723 | ISO/IEC 10165-5:1994":subsystem holds reference information about an Application subsystem.

It specializes by adding only behaviour.

7.4.3 ASO

This subclass of "Rec. X.721 | ISO/IEC 10165-2:1992":top holds reference information about an ASO.

It specializes by adding the following attributes:

- "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntityId;
- asoTitle;
- asoQualifier;
- "Rec X.721 | ISO/IEC 10165-2 : 1992":operationalState.

7.4.4 ASO entity

This subclass of aso and "Rec. X.723 | ISO/IEC 10165-5:1994":communicationsEntity holds reference information about an ASO entity.

It specializes by adding the following attribute:

- application context names supported.

7.4.5 ACSE

This subclass of aso holds reference information about ACSE application service element.

It specializes by adding the following attributes:

- ACSE functional units supported as initiator;
- ACSE functional units supported as responder;
- ACSE editions supported.

ISO/IEC 10165-8 : 1999 (E)

7.4.6 ASO Invocation

This subclass of "Rec. X.721 | ISO/IEC 10165-2:1992":top holds reference information about an invocation of an ASO or of an ASO entity.

It specializes by adding the following attributes:

- "Rec. X.723 | ISO/IEC 10165-5:1994":connectionId;
- invocationOfPointer.

7.4.7 Application entity invocation

This subclass of asoInvocation and "Rec. X.723 | ISO/IEC 10165-5:1994":singlePeerConnection holds reference information about an application entity invocation.

It specializes by adding only behaviour.

7.4.8 ACSE association

This subclass of asoInvocation holds reference information about an ACSE association.

It specializes by adding the following attributes:

- calling AE title;
- ACSE functional units negotiated in use;
- Application context in use;
- parent ASO invocation (relationship pointer to parent ASO invocation. It could be the AEI);
- it may also have an attribute for the called AE Title, if the AE Title is known.

7.4.9 AP invocation

This subclass of "Rec. X.721 | ISO/IEC 10165-2:1992":top holds reference information about an application process (AP) invocation.

It specializes by adding the following attributes:

- apInvocationId;
- invocationOfPointer, to identify the specific AP it is an invocation of.

7.5 Name bindings

The following name bindings are defined in this Recommendation | International Standard for support of the model:

- apInvocation-applicationSubsystem;
- applicationProcess-applicationSubsystem;
- asoInvocation-apInvocation;
- asoInvocation-asoInvocation;
- asoEntity-applicationProcess;
- aso-asoEntity;
- aso-aso.

Annex A

Monolithic Upper Layer

(This annex forms an integral part of this Recommendation | International Standard)

Given that a separate layer managed object design is defined, the characteristics of the separate managed objects can be included in defining a merged or monolithic upper layer objects (e.g. a monolithic upper layer entity managed object, a monolithic upper layer connection protocol machine managed object, and a monolithic upper layer connection managed object, as shown in Figure A.1). Monolithic upper layer implementations are not adequately modelled by separate managed objects for each protocol layer. The monolithic upper layer object classes define essentially merge the functionality of the separate session layer, presentation layer and application entity object classes into one object class for an entity, a connection protocol machine and a connection. Note that the behaviour at the application layer for the application entity's constituent ASO Entities, ASOs, and ASEs does not change.

The management information in the monolithic managed object design is essentially the same as the management information in the separable upper layer managed object design previously defined.

The information being kept is the same for the monolithic managed object case as for the separate managed object case, except for the lack of need for the one-to-one relationship pointers.

The monolithic upper layer entity managed objects are appropriate when the implementation has combined the upper layer protocols into a single entity.

For the monolithic UL entity managed object class, multiple inheritance is used from the application entity, presentation entity, session entity, presentation COPM, and session COPM managed object classes. The PSAP and SSAP do not need to be represented because null selectors are appropriate in the monolithic case. Specific implementations which use non-null selectors could subclass. The local SAP names attribute is used to point to the TSAP managed object.

Similarly, for the monolithic UL Connection managed object class, multiple inheritance is used from the Application Entity Invocation, Presentation Connection, and Session Connection managed object classes.

It would not be easy to merge the ASO/ASE specific association information objects, due to the one-to-many containment relationship. Having a different monolithic ASO/ASE-association endpoint subclass defined for each ASO/ASE-type is not practical due to the combinatorial complexity involved.

There is benefit in retaining separate managed object instances to maintain each ASO/ASE invocation's view of the association.

A.1 Monolithic Upper Layer Subsystem

This subclass of applicationSubsystem, presentationSubsystem, and sessionSubsystem holds reference information about an application subsystem which has monolithic connection of all three upper layers.

It specializes by adding only behaviour.

A.2 Monolithic Upper Layer Entity

This subclass of applicationEntity, presentationEntity, sessionEntity, presentationCOPM and sessionCOPM holds reference information about an application entity which has monolithic implementation of all three upper layers.

It specializes by adding the following attributes:

- presentation selector value;
- session selector value.

A.3 Monolithic Upper Layer Connection

This subclass of applicationEntityInvocation, presentationConnection, and sessionConnection holds reference information about an application connection which has monolithic connection of all three upper layers.

It specializes by adding only behaviour.

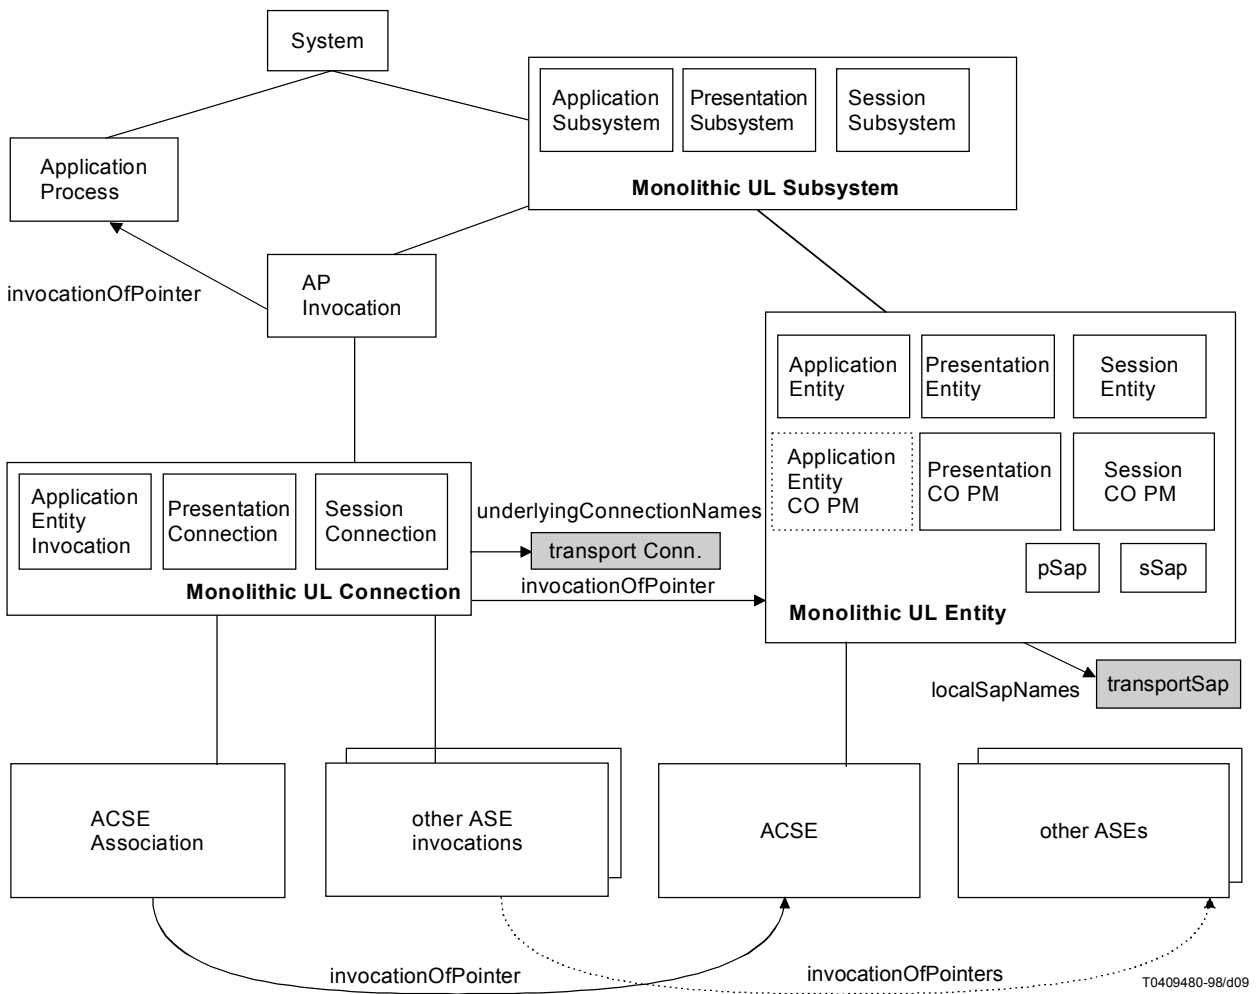


Figure A.1 – Monolithic Upper Layer Managed Object Classes and their Relationships

NOTE 1 – Transport entities are shaded because they are outside the scope of this Recommendation | International Standard.

NOTE 2 – Solid lines indicate containment relationships, arrowed lines indicate attribute pointer relationships.

Annex B

Management Information Definitions

(This annex forms an integral part of this Recommendation | International Standard)

```
--<GDMO.Document "ITU-T Rec. X.287 | ISO/IEC 10165-8 : 1999"
-- {joint-iso-ccitt ms(9) smi(3) part8(8) }>--
--<GDMO.Version 1.3 "ITU-T Rec. X.287 | ISO/IEC 10165-8 : 1999" >--
```

aCSE MANAGED OBJECT CLASSDERIVED FROM **aso**;

CHARACTERIZED BY

aCSEPackage PACKAGE**BEHAVIOUR****aCSEBehaviour BEHAVIOUR**

DEFINED AS

! This subclass of ase is a specialized application service object holds reference information about an ACSE application service element. It specializes by adding the following attributes:

- acseFUinitiator, the ACSE functional units supported as initiator;
- acseFUresponder, the ACSE functional units supported as responder;
- acseEditionsSupported, the ACSE editions supported;

An application service element does not qualify as an asoEntity or as a "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity because it does not have both the association phase and the transfer phase of communication. ACSE provides only the association phase of communication.

!;

ATTRIBUTES

acseFUinitiator GET,
acseEditionsSupported GET,
acseFUresponder GET;;;

REGISTERED AS {UL-AttributeModule.acseMOCId};

acseAssociation MANAGED OBJECT CLASSDERIVED FROM **asoInvocation**;

CHARACTERIZED BY

acseAssociationPackage PACKAGE**BEHAVIOUR****acseAssociationBehaviour BEHAVIOUR**

DEFINED AS

!This subclass of aseInvocation holds reference information for an ACSE association. It specializes by adding the following attributes:

- calling AE title,
- ACSE functional units negotiated in use,
- Application context in use,
- parent ASO invocation (relationship pointer to parent ASO invocation, which could be the AEI).

It may also have an attribute for the called AE title, if known.!;

ATTRIBUTES

callingAETitle GET,
acseFUinUse GET,
applContextInUse GET,
parentASOinvoC GET;;;

CONDITIONAL PACKAGES**calledAETitlePackage PACKAGE**

ATTRIBUTES

calledAETitle GET;

REGISTERED AS {UL-AttributeModule.calledAETitlePID};

PRESENT IF !Present only if the called AE Title is known. !;
REGISTERED AS {UL-AttributeModule.acseAssociationMOCId};

apInvocation MANAGED OBJECT CLASS
DERIVED FROM "Rec. X.721 | ISO/IEC 10165-2 : 1992":top;
CHARACTERIZED BY
apInvocationPackage PACKAGE
BEHAVIOUR
apInvocationBehaviour BEHAVIOUR
DEFINED AS
! This subclass of "Rec. X.721 | ISO/IEC 10165-2 :
1992":top holds reference information about an Application
Process Invocation. It specializes by adding the following
attributes:
- apInvocationId;
- invocationOfPointer.

The apInvocationId attribute serves as the naming attribute
for instances of this class. The invocationOfPointer
attribute identifies the specific Application Process
(using the distinguished name, DN, of an instance of the
"Rec. X.723 | ISO/IEC 10165-5 : 1994":applicationProcess
managed object class) of which the instance of this class
is an invocation. !;;
ATTRIBUTES
apInvocationId GET,
invocationOfPointer GET;;
REGISTERED AS {UL-AttributeModule.apInvocationMOCId};

applicationEntity MANAGED OBJECT CLASS
DERIVED FROM asoEntity;
CHARACTERIZED BY
applicationEntityPackage PACKAGE
BEHAVIOUR
applicationEntityBehaviour BEHAVIOUR
DEFINED AS
!This subclass of asoEntity holds reference information
about an application entity. For an instance of the
applicationEntity object class, the asoQualifier attribute
contains the value of the local application entity (AE)
qualifier. The asoTitle attribute contains the value of the
associated application process (AP) title. The
communicationsEntityId attribute holds the instance's
Application Entity (AE) Id. The localSapNames attribute
identifies a pSAP object instance.

An applicationEntity object is always the outermost ASO
Entity in an AP and serves as the supporting service for
all of its contained ASOs (including ASO Entities and
ASEs). !;;;
REGISTERED AS {UL-AttributeModule.applicationEntityMOCId};

applicationEntityInvocation MANAGED OBJECT CLASS
DERIVED FROM
"Rec. X.723 | ISO/IEC 10165-5 : 1994":singlePeerConnection,
asoInvocation;
CHARACTERIZED BY
applicationEntityInvocationPackage PACKAGE
BEHAVIOUR
aEInvocationBehaviour BEHAVIOUR
DEFINED AS
! This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
1994":singlePeerConnection and asoInvocation represents an
invocation of an application entity. It adds no additional
attributes.

The inherited "Rec. X.723 | ISO/IEC 10165-5 :
1994":connectionId attribute serves as the naming attribute
for instances of this class, and represents the application
entity (AE) invocation id. The inherited attribute "Rec.
X.723 | ISO/IEC 10165-5 : 1994":underlyingConnectionNames

identifies the supporting services or connections, which for instances of this class is a presentation address (the distinguished name of an object instance representing a presentation invocation). The inherited `invocationOfPointer` attribute identifies the application entity of which an instance of this class is an invocation. !;;;;

REGISTERED AS {UL-AttributeModule.applicationEntityInvocationMOCId};

applicationSubsystem MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem;

CHARACTERIZED BY

applicationSubsystemPackage PACKAGE

BEHAVIOUR

applicationSubsystemBehaviour BEHAVIOUR

DEFINED AS

! This subclass of "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem is used as a common containment point for managed objects in a system that relate to the application layer (i.e., application entity Mos). It can use the "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem-system Name Binding. !;;;;

REGISTERED AS {UL-AttributeModule.applicationSubsystemMOCId};

aso MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.721 | ISO/IEC 10165-2 : 1992":top;

CHARACTERIZED BY

asoPackage PACKAGE

BEHAVIOUR

asoBehaviour BEHAVIOUR

DEFINED AS

! This subclass of "Rec. X.721 | ISO/IEC 10165-2 : 1992":top holds reference information about an ASO, which is a collection of two or more ASOs (including specialized ASOs, e.g., ASEs) together with a Control Function that moderates the interactions of the component ASEs and ASOs with the service provided and the supporting service. An ASO contains one or more ASEs/ASOs that provide for data transfer phase of communication. An ASO may also contain an ASE that provides for the establishment phase of communication. An ASO association can only be established to an ASO that provides for both the establishment and data transfer phases.

This managed object class is non-instantiable. Subclasses of this class provide information about specific ASOs including the information about the Controlling Function. The information about the Control Function may only be specified via the behaviour definitions of subclasses of this class, but can be made visible via attributes of the subclass if needed.

It specializes by adding the following attributes:

- "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId;
- asoTitle;
- asoQualifier;
- "Rec. X.721 | ISO/IEC 10165-2 : 1992":operationalState.

The attribute "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId serves as the naming attribute for instances of this class. The ASO Name is formed by concatenating the asoTitle and the asoQualifier. The operationalState is used to indicate whether instances of this class are enabled or disabled, the syntax and semantics of which are defined in Rec. X.721 | ISO/IEC 10165-2 and Rec. X.731 | ISO/IEC 10164-2. !;;;

ATTRIBUTES

"Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId GET,
 asoTitle GET,
 asoQualifier GET,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992":operationalState GET;;;

REGISTERED AS {UL-AttributeModule.asoMOCId};

asoEntity MANAGED OBJECT CLASS

DERIVED FROM

"Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity,
aso;

CHARACTERIZED BY

asoEntityPackage PACKAGE

BEHAVIOUR

asoEntityBehaviour BEHAVIOUR

DEFINED AS

! This subclass of aso and "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity holds reference information about an ASO entity, which is an ASO that contains ACSE for the establishment phase of communication. Thus, it represents an ASO with which communications may be established.

An instance of an asoEntity serves as the supporting service for its contained objects, which can include ASOs (i.e., subclasses of the ASO managed object class: this includes ASEs, e.g., ACSE, CMISE, SMASE, and also other ASO Entities).

It specializes by adding the following attribute:

- applContextNameSupport.

The applContextNameSupport attribute identifies the specific application contexts that are supported by an instance of this class. These are identified using the given application contexts' object identifier values. !;;

ATTRIBUTES

applContextNameSupport GET;;;

REGISTERED AS {UL-AttributeModule.asoEntityMOCId};

asoInvocation MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.721 | ISO/IEC 10165-2 : 1992":top;

CHARACTERIZED BY

asoInvocationPackage PACKAGE

BEHAVIOUR

asoInvocationBehaviour BEHAVIOUR

DEFINED AS

! This subclass of "Rec. X.721 | ISO/IEC 10165-2 : 1992":top holds reference information about an ASO Invocation. This managed object class is non-instantiable. Subclasses of this class provide information about invocations of specific ASOs.

An instance of a subclass of ASO Invocation serves as the supporting service for its * contained * object instances, which are in turn also subclasses of ASO Invocation (e.g., AE Invocation, ACSE Invocation, CMISE Invocation, SMASE Invocation).

It specializes by adding the following attributes:

- connectionId;

- invocationOfPointer.

The connectionId attribute serves as the naming attribute for instances of this class. The invocationOfPointer attribute identifies a specific ASO of which the instance of this class is an invocation. !;;

ATTRIBUTES

"Rec. X.723 | ISO/IEC 10165-5 : 1994":connectionId GET,
invocationOfPointer GET;;;

REGISTERED AS {UL-AttributeModule.asoInvocationMOCId};

monoULConnection MANAGED OBJECT CLASS

DERIVED FROM

applicationEntityInvocation,

presentationConnection,

sessionConnection;

CHARACTERIZED BY

**monoULConnectionPackage PACKAGE
BEHAVIOUR**

**monoULConnectionBehaviour BEHAVIOUR
DEFINED AS**

! The monoULConnection managed object class is a subclass of three object classes: applicationEntityInvocation, presentationConnection and sessionConnection. It holds reference information about an application connection which has monolithic connection of all three upper layers. It adds no additional attributes. !;;;;

REGISTERED AS {UL-AttributeModule.monoULConnectionMOCId};

monoUEntity MANAGED OBJECT CLASS**DERIVED FROM**

**applicationEntity,
presentationEntity,
sessionEntity,
presentationCopl,
sessionCopl;**

CHARACTERIZED BY

monoUEntityP1 PACKAGE

BEHAVIOUR

**monoUEntityBehaviour BEHAVIOUR
DEFINED AS**

! The monoUEntity managed object class is a subclass of applicationEntity, presentationEntity, sessionEntity, presentationCopl and sessionCopl object classes. It holds reference information about an application entity which has monolithic implementation of all three upper layers.

The communicationsEntityId attribute is multiply inherited from all three "Entity" superclasses and serves as the naming attribute for instances of this class. It should have the exact value as the coProtocolMachineld attribute, multiply inherited from "Copl" superclasses.

The operationalState attribute has the semantics and syntax defined in "Rec. X.731 | ISO/IEC 10164-2" State Management Function. The value of the localSAPName attribute (inherited) should contain the address of the SAP that the virtual sessionEntity points to. The value of the asoQualifier attribute (inherited from aso) is the local AE Qualifier. The value of the asoTitle attribute (inherited from aso) is the AP Title. The value of the application context names supported (inherited from applicationEntity) contains the values supported by the virtual application layer.

Since this is a subclass of presentationCopl and sessionCopl, it also holds reference information pertaining to the capabilities of a protocol machine which has monolithic implementation of all three upper layers.

The following attributes are inherited from presentationCopl:

- Presentation functional units supported (bitstring);**
- Abstract syntaxes supported (set of OBJECT IDENTIFIER);**
- Transfer syntaxes supported (set of OBJECT IDENTIFIER).**

The following attributes are inherited from sessionCopl:

- Session functional units supported (bitstring);**
- Optional session support requirements (i.e., segmenting);**
- Session protocol versions supported.**

This object class specializes by adding the following attributes:

- presentation selector value;**
- session selector value.**

These two attributes are needed because in the monolithic implementation the functionality of the PSAP and SSAP object

classes are "absorbed" into this object class along with their containers (presentationEntity and sessionEntity). !;;

ATTRIBUTES

presSelectorValue GET,
sessionSelectorValue GET;;;

REGISTERED AS {UL-AttributeModule.monoULEntityMOCId};

monolithicUpperLayerSubsystem MANAGED OBJECT CLASS

DERIVED FROM

sessionSubsystem,
presentationSubsystem,
applicationSubsystem;

CHARACTERIZED BY

monolithicUpperLayerSubsystemPackage PACKAGE

BEHAVIOUR

monolithicUpperLayerSubsystemBehaviour BEHAVIOUR
DEFINED AS

! This subclass of sessionSubsystem, presentationSubsystem, applicationSubsystem is used as a common containment point for managed objects in a system that relate to the a monolithic upper layer. It can use the "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem-system Name Binding. !;;;

REGISTERED AS {UL-AttributeModule.monolithicUpperLayerSubsystemMOCId};

pSap MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":sap1;

CHARACTERIZED BY

pSapP1 PACKAGE

BEHAVIOUR

pSapB1 BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 : 1994":sap1 has the P-selector and the binding between the AE and the sap.!;;;

REGISTERED AS {UL-AttributeModule.pSapMOCId};

presentationConnection MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":singlePeerConnection;

CHARACTERIZED BY

presConnEndpointP1 PACKAGE

BEHAVIOUR

presConnectionBehaviour BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 : 1994":singlePeerConnection holds reference information pertaining to the single presentation connection for the association. The underlying connections attribute is used to point to the session connection endpoint used.

It specializes by adding the following attributes:

- presentation functional units negotiated in use;
- presentation contexts in use. !;;

ATTRIBUTES

presFUinUse GET,
presContextInUse GET;;;

REGISTERED AS {UL-AttributeModule.presentationConnectionMOCId};

presentationCopl MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":coProtocolMachine;

CHARACTERIZED BY

presentationCoplP1 PACKAGE

BEHAVIOUR

presentationCoplBehaviour BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 : 1994":coProtocolMachine holds reference information pertaining to the capabilities of a Presentation protocol machine.

It specializes by adding the following attributes:

- Presentation functional units supported (bitstring);

- Abstract syntaxes supported (set of OBJECT IDENTIFIER);
- Transfer syntaxes supported (set of OBJECT IDENTIFIER).

!;;

ATTRIBUTES

presFUsupport GET,
 abstrSyntaxSupport GET,
 transfSyntaxSupport GET;;;

REGISTERED AS {UL-AttributeModule.presentationCoplMOCId};

presentationEntity MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity;

CHARACTERIZED BY

presentationEntityP1 PACKAGE

BEHAVIOUR

presentationEntityB1 BEHAVIOUR

DEFINED AS

! This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
 1994":communicationsEntity holds reference information
 about a Presentation Entity. It specializes by adding only
 behaviour.!:;;;

REGISTERED AS {UL-AttributeModule.presentationEntityMOCId};

presentationSubsystem MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem;

CHARACTERIZED BY

presentationSubsystemPackage PACKAGE

BEHAVIOUR

presentationSubsystemBehaviour BEHAVIOUR

DEFINED AS

! This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
 1994":subsystem is used as a common containment point for
 managed objects in a system that relate to the presentation
 layer (i.e., presentation entity MOs). It can use the "Rec.
 X.723 | ISO/IEC 10165-5 : 1994": subsystem-system Name
 Binding. !:;;;

REGISTERED AS {UL-AttributeModule.presentationSubsystemMOCId};

sSap MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":sap1;

CHARACTERIZED BY

sSapP1 PACKAGE

BEHAVIOUR

sSapB1 BEHAVIOUR

DEFINED AS

!This managed object is a subclass of "Rec. X.723 | ISO/IEC
 10165-5 : 1994":sap1 and has the S- selector and binding
 between PE and SAP.!:;;;

REGISTERED AS {UL-AttributeModule.sSapMOCId};

sessionConnection MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":singlePeerConnection;

CHARACTERIZED BY

sessionConnEndpointP1 PACKAGE

BEHAVIOUR

sessionConnEndpointBehaviour BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
 1994":singlePeerConnection holds reference information
 pertaining to the single session connection for the
 association. The underlying connections attribute is used
 to point to the transport connection used.

It specializes by adding the following attributes:

- Session protocol version in use;
- Session functional units negotiated in use;
- it may have an attribute for the negotiated maximum TSDU
 size if segmenting is in use. !:;;

ATTRIBUTES

sessProtInUse GET,
sessFUinUse GET;;;

CONDITIONAL PACKAGES

maxTSDUsizePackage PACKAGE

ATTRIBUTES

maxTSDUsize GET;

REGISTERED AS {UL-AttributeModule.maxTSDUsizePId};

PRESENT IF "Present only if segmenting is in use.";

REGISTERED AS {UL-AttributeModule.sessionConnectionMOCId};

sessionCoplM MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":coProtocolMachine;

CHARACTERIZED BY

sessionCoplM1 PACKAGE

BEHAVIOUR

sessionCoplMBehaviour BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
1994":coProtocolMachine holds reference information
pertaining to the capabilities of a Session protocol
machine.

It specializes by adding the following attributes:

- Session protocol versions supported (bitstring);
- Session functional units supported (bitstring);
- optional support requirements (i.e., segmenting). !;;

ATTRIBUTES

sessProtVerSupport GET,
sessFUsupport GET,
sessOptSupport GET;;;

REGISTERED AS {UL-AttributeModule.sessionCoplMMOCId};

sessionEntity MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity;

CHARACTERIZED BY

sessionEntityP1 PACKAGE

BEHAVIOUR

sessionEntityB1 BEHAVIOUR

DEFINED AS

!This managed object holds reference information about the
session entity and is a subclass of
"Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntity.!;;;

REGISTERED AS {UL-AttributeModule.sessionEntityMOCId};

sessionSubsystem MANAGED OBJECT CLASS

DERIVED FROM "Rec. X.723 | ISO/IEC 10165-5 : 1994":subsystem;

CHARACTERIZED BY

sessionSubsystemPackage PACKAGE

BEHAVIOUR

sessionSubsystemBehaviour BEHAVIOUR

DEFINED AS

!This subclass of "Rec. X.723 | ISO/IEC 10165-5 :
1994":subsystem is used as a common containment point for
managed objects in a system that relate to the session
layer (i.e., session entity MOs). It can use the "Rec.
X.723 | ISO/IEC 10165-5 : 1994":subsystem-system Name
Binding. !;;;

REGISTERED AS {UL-AttributeModule.sessionSubsystemMOCId};

abstrSyntaxSupport ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.AbstrSyntaxSupport;

REGISTERED AS {UL-AttributeModule.abstrSyntaxSupportAId};

acseEditionsSupported ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.AcseEditionsSupported;

REGISTERED AS {UL-AttributeModule.acseEditionsSupportedAId};

acseFUinUse ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.AcseFUs;

REGISTERED AS {UL-AttributeModule.acseFUinUseAId};

acseFUinitiator ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.AcseFUs;
 REGISTERED AS {UL-AttributeModule.acseFUinitiatorAid};

acseFUresponder ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.AcseFUs;
 REGISTERED AS {UL-AttributeModule.acseFUresponderAid};

aeInvocationId ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.AeInvocationId;
 REGISTERED AS {UL-AttributeModule.aeInvocationIdAid};

apInvocationId ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ApInvocationId;
 MATCHES FOR EQUALITY;
 REGISTERED AS {UL-AttributeModule.ulAttributeIDAid};

apInvocationPointer ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ApInvocation;
 REGISTERED AS {UL-AttributeModule.apInvocationIdAid};

applContextInUse ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ApplContextInUse;
 REGISTERED AS {UL-AttributeModule.applContextInUseAid};

applContextNameSupport ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ApplContextNameSupport;
 REGISTERED AS {UL-AttributeModule.applContextNameSupportAid};

asoQualifier ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ASOQualifier;
 REGISTERED AS {UL-AttributeModule.asoQualifierAid};

asoTitle ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ASOTitle;
 REGISTERED AS {UL-AttributeModule.asoTitleAid};

calledAETitle ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.CallAETitle;
 REGISTERED AS {UL-AttributeModule.calledAETitleAid};

callingAETitle ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.CallAETitle;
 REGISTERED AS {UL-AttributeModule.callingAETitleAid};

invocationOfPointer ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ObjectInstance;
 REGISTERED AS {UL-AttributeModule.invocationOfPointerAid};

maxTSDUsize ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.MaxTSDUsize;
 REGISTERED AS {UL-AttributeModule.maxTSDUsizeAid};

parentASOinvoC ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.ParentASOinvoC;
 REGISTERED AS {UL-AttributeModule.parentASOinvoCAid};

presContextInUse ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.PresContextInUse;
 REGISTERED AS {UL-AttributeModule.presContextInUseAid};

presFUinUse ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.PresFUs;
 REGISTERED AS {UL-AttributeModule.presFUinUseAid};

presFUsupport ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.PresFUs;
 REGISTERED AS {UL-AttributeModule.presFUsupportAid};

presSelectorValue ATTRIBUTE
 WITH ATTRIBUTE SYNTAX UL-AttributeModule.PresSelectorValue;
 REGISTERED AS {UL-AttributeModule.presSelectorValueAid};

ISO/IEC 10165-8 : 1999 (E)

sessFUinUse ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessFUs;
REGISTERED AS {UL-AttributeModule.sessFUinUseAid};

sessFUsupport ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessFUs;
REGISTERED AS {UL-AttributeModule.sessFUsupportAid};

sessOptSupport ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessOptSupport;
REGISTERED AS {UL-AttributeModule.sessOptSupportAid};

sessProtInUse ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessProtVer;
REGISTERED AS {UL-AttributeModule.sessProtInUseAid};

sessProtVerSupport ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessProtVer;
REGISTERED AS {UL-AttributeModule.sessProtVerSupportAid};

sessionSelectorValue ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SessionSelectorValue;
REGISTERED AS {UL-AttributeModule.sessionSelectorValueAid};

supportingServices ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.SupportingServices;
REGISTERED AS {UL-AttributeModule.supportingServicesAid};

transfSyntaxSupport ATTRIBUTE

WITH ATTRIBUTE SYNTAX UL-AttributeModule.TransfSyntaxSupport;
REGISTERED AS {UL-AttributeModule.transfSyntaxSupportAid};

ap-applicationSubsystem NAME BINDING

SUBORDINATE OBJECT CLASS "Rec. X.723 | ISO/IEC 10165-5 : 1994":applicationProcess AND
SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS applicationSubsystem AND SUBCLASSES;

WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":applicationProcessId;

REGISTERED AS {UL-AttributeModule.ap-applicationSubsystemNBid};

apInvocation-applicationSubsystem NAME BINDING

SUBORDINATE OBJECT CLASS apInvocation AND SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS applicationSubsystem AND SUBCLASSES;

WITH ATTRIBUTE apInvocationId;

REGISTERED AS {UL-AttributeModule.apInvocation-applicationSubsystemNBid};

aso-aso NAME BINDING

SUBORDINATE OBJECT CLASS aso AND SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS aso AND SUBCLASSES;

WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId;

REGISTERED AS {UL-AttributeModule.aso-asoNBid};

aso-asoEntity NAME BINDING

SUBORDINATE OBJECT CLASS aso AND SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS asoEntity AND SUBCLASSES;

WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId;

REGISTERED AS {UL-AttributeModule.aso-asoEntityNBid};

asoEntity-applicationProcess NAME BINDING

SUBORDINATE OBJECT CLASS asoEntity AND SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS "Rec. X.723 | ISO/IEC 10165-5 : 1994":applicationProcess AND
SUBCLASSES;

WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":communicationsEntityId;

REGISTERED AS {UL-AttributeModule.asoEntity-applicationProcessNBid};

asoInvocation-apInvocation NAME BINDING

SUBORDINATE OBJECT CLASS asoInvocation AND SUBCLASSES;

NAMED BY SUPERIOR OBJECT CLASS apInvocation AND SUBCLASSES;

WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":connectionId;

REGISTERED AS {UL-AttributeModule.asoInvocation-apInvocationNBid};

asoInvocation-asoInvocation NAME BINDING

SUBORDINATE OBJECT CLASS asoInvocation AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS asoInvocation AND SUBCLASSES;
WITH ATTRIBUTE "Rec. X.723 | ISO/IEC 10165-5 : 1994":connectionId;
REGISTERED AS {UL-AttributeModule.asoInvocation-asoInvocationNBId};
UL-AttributeModule {joint-iso-ccitt ms(9) smi(3) part8(8) asn1Module(2) 0 }

--<ASN1.Version 1990,1994 UL-AttributeModule
 --{joint-iso-ccitt ms(9) smi(3) part8(8) asn1Module(2) 0 }>--
DEFINITIONS ::=

BEGIN

--EXPORTS everything

IMPORTS

RelativeDistinguishedName

FROM InformationFramework {joint-iso-ccitt ds(5) modules(1) informationFramework(1) }

AP-title, Application-context-name, AE-invocation-identifier, AP-invocation-identifier, AE-qualifier,
AE-title, ACSE-requirements

FROM ACSE-1 {joint-iso-ccitt association-control(2) modules(0) apdus(0) version1(1)}

Presentation-requirements, Presentation-selector, Context-list, Abstract-syntax-name,
Transfer-syntax-name

FROM ISO8823-PRESENTATION

ObjectInstance

FROM CMIP-1 {joint-iso-ccitt ms(9) cmip(1) modules(0) protocol(3) };

--value references--

ulMObjectClass OBJECT IDENTIFIER ::= {joint-iso-ccitt ms(9) smi(3) part8(8) managedObjectClass(3)}

ulMoPackage OBJECT IDENTIFIER ::= {joint-iso-ccitt ms(9) smi(3) part8(8) package(4) }

ulAttributeID OBJECT IDENTIFIER ::= {joint-iso-ccitt ms(9) smi(3) part8(8) attribute(7) }

ulNameBinding OBJECT IDENTIFIER ::= {joint-iso-ccitt ms(9) smi(3) part8(8) nameBinding(6) }

acseMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 1}

acseAssociationMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 2}

apInvocationMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 3}

applicationEntityMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 4}

applicationEntityInvocationMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 5}

applicationSubsystemMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 6}

asoMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 7}

asoEntityMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 8}

asoInvocationMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 9}

monoULConnectionMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 10}

monoULEntityMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 11}

monolithicUpperLayerSubsystemMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 12}

pSapMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 13}

presentationConnectionMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 14}

presentationCoplMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 15}

presentationEntityMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 16}

presentationSubsystemMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 17}

sSapMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 18}

sessionConnectionMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 19}

sessionCoplMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 20}

sessionEntityMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 21}

sessionSubsystemMOCId OBJECT IDENTIFIER ::= {ulMObjectClass 22}

calledAeTitlePid OBJECT IDENTIFIER ::= {ulMoPackage 1}

maxTSDUsizePid OBJECT IDENTIFIER ::= {ulMoPackage 2}

abstrSyntaxSupportAid OBJECT IDENTIFIER ::= {ulAttributeID 1}

acseEditionsSupportedAid OBJECT IDENTIFIER ::= {ulAttributeID 2}

acseFUinUseAid OBJECT IDENTIFIER ::= {ulAttributeID 3}

acseFUinitiatorAid OBJECT IDENTIFIER ::= {ulAttributeID 4}

acseFUresponderAid OBJECT IDENTIFIER ::= {ulAttributeID 5}

aeInvocationIdAid OBJECT IDENTIFIER ::= {ulAttributeID 6}

ulAttributeIDAid OBJECT IDENTIFIER ::= {ulAttributeID 7}
apInvocationIdAid OBJECT IDENTIFIER ::= {ulAttributeID 8}
applContextInUseAid OBJECT IDENTIFIER ::= {ulAttributeID 9}
applContextNameSupportAid OBJECT IDENTIFIER ::= {ulAttributeID 10}
asoQualifierAid OBJECT IDENTIFIER ::= {ulAttributeID 11}
asoTitleAid OBJECT IDENTIFIER ::= {ulAttributeID 12}
calledAETitleAid OBJECT IDENTIFIER ::= {ulAttributeID 13}
callingAETitleAid OBJECT IDENTIFIER ::= {ulAttributeID 14}
invocationOfPointerAid OBJECT IDENTIFIER ::= {ulAttributeID 15}
maxTSDUsizeAid OBJECT IDENTIFIER ::= {ulAttributeID 16}
parentASOinvoAid OBJECT IDENTIFIER ::= {ulAttributeID 17}
presContextInUseAid OBJECT IDENTIFIER ::= {ulAttributeID 18}
presFUinUseAid OBJECT IDENTIFIER ::= {ulAttributeID 19}
presFUsupportAid OBJECT IDENTIFIER ::= {ulAttributeID 20}
presSelectorValueAid OBJECT IDENTIFIER ::= {ulAttributeID 21}
sessFUinUseAid OBJECT IDENTIFIER ::= {ulAttributeID 22}
sessFUsupportAid OBJECT IDENTIFIER ::= {ulAttributeID 23}
sessOptSupportAid OBJECT IDENTIFIER ::= {ulAttributeID 24}
sessProtInUseAid OBJECT IDENTIFIER ::= {ulAttributeID 25}
sessProtVerSupportAid OBJECT IDENTIFIER ::= {ulAttributeID 26}
sessionSelectorValueAid OBJECT IDENTIFIER ::= {ulAttributeID 27}
supportingServicesAid OBJECT IDENTIFIER ::= {ulAttributeID 28}
transfSyntaxSupportAid OBJECT IDENTIFIER ::= {ulAttributeID 29}

ap-applicationSubsystemNBid OBJECT IDENTIFIER ::= {ulNameBinding 1}
apInvocation-applicationSubsystemNBid OBJECT IDENTIFIER ::= {ulNameBinding 2}
aso-asoNBid OBJECT IDENTIFIER ::= {ulNameBinding 3}
aso-asoEntityNBid OBJECT IDENTIFIER ::= {ulNameBinding 4}
asoEntity-applicationProcessNBid OBJECT IDENTIFIER ::= {ulNameBinding 5}
asoInvocation-apInvocationNBid OBJECT IDENTIFIER ::= {ulNameBinding 6}
asoInvocation-asoInvocationNBid OBJECT IDENTIFIER ::= {ulNameBinding 7}

--Type references--

AbstrSyntaxSupport ::= SET OF Abstract-syntax-name
AcseEditionsSupported ::= BIT STRING
AcseFUs ::= ACSE-requirements -- from amendment 1 to acse protocol
AeInvocationId ::= AE-invocation-identifier
ApInvocationId ::= AP-invocation-identifier
ApInvocation ::= AP-invocation-identifier
ApplContextInUse ::= Application-context-name
ApplContextNameSupport ::= SET OF Application-context-name
AsoInvoId ::= INTEGER -- This should be compatible syntax with AeInvocationId
ASOId ::= GraphicString
ASOInvocationId ::= GraphicString
ASOTitle ::= SEQUENCE {
 ap-title AP-title,
 aso-name SEQUENCE OF ASOQualifier}
ASOQualifier ::= RelativeDistinguishedName --of ASO--
CallAETitle ::= AE-title
LocalAEQualifier ::= AE-qualifier
MaxTSDUsize ::= INTEGER -- four octets maximum length
ParentASOinvo ::= ObjectInstance
PresContextInUse ::= Context-list -- only one transfer syntax used for each abstract syntax
PresFUs ::= Presentation-requirements
PresSelectorValue ::= Presentation-selector

```

SessFUs ::= BIT STRING {
    half-duplex      (0),
    duplex          (1),
    expedited-data  (2),
    minor-synchronize (3),
    major-synchronize (4),
    resynchronize   (5),
    activity-management (6),
    negotiated-release (7),
    capability-data  (8),
    exceptions       (9),
    typed-data      (10) }

```

```

SessionSelectorValue ::= OCTET STRING -- 16 octets max

```

```

SessOptSupport ::= BIT STRING { segmenting (0) }

```

```

SessProtVer ::= BIT STRING {
    version1      (0),
    version2      (1) }

```

```

SupportingServices ::= SET OF ObjectInstance

```

```

TransfSyntaxSupport ::= SET OF Transfer-syntax-name

```

```

END -- of UL-AttributeModule

```

```

--<GDMO.EndDocument "ITU-T Rec. X.287 | ISO/IEC 10165-8 : 1999"
-- {joint-iso-ccitt ms(9) smi(3) part8(8)}>--

```


ITU-T RECOMMENDATIONS SERIES

Series A	Organization of the work of the ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure
Series Z	Languages and general software aspects for telecommunication systems